

PUBLISHED: 31-JUL-2012
2014.0 RANGE ROVER (LG), 309-00

EXHAUST SYSTEM - V8 N/A 5.0L PETROL/V8 S/C 5.0L PETROL

RIGHT CATALYTIC CONVERTER (G1509421)

REMOVAL AND INSTALLATION

SPECIAL TOOL(S)



REMOVAL



WARNING:

Observe due care when working near a hot exhaust system.



NOTE:

Removal steps in this procedure may contain installation details.

1.




WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2. For additional information, refer to: Exhaust System (309-00, Removal and Installation).

- 3.

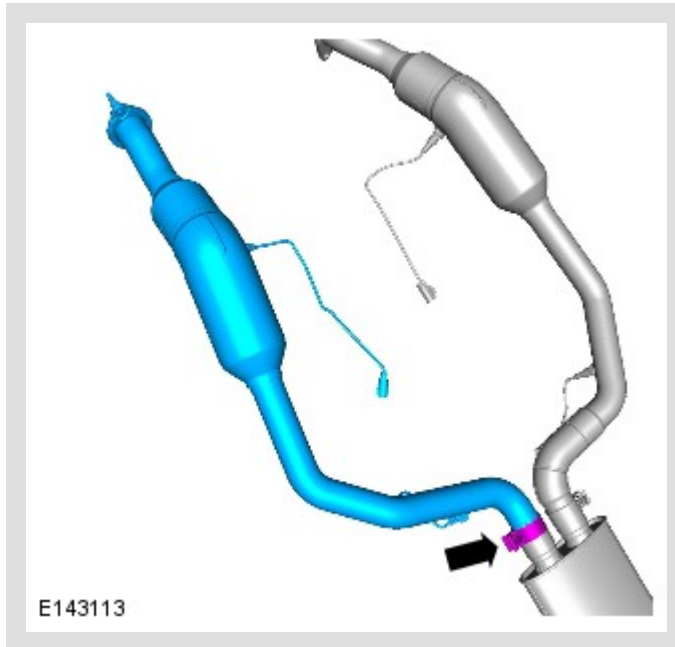


TORQUE: 55 Nm

- 4.

 **NOTE:**

Do not disassemble further if the component is removed for access only.

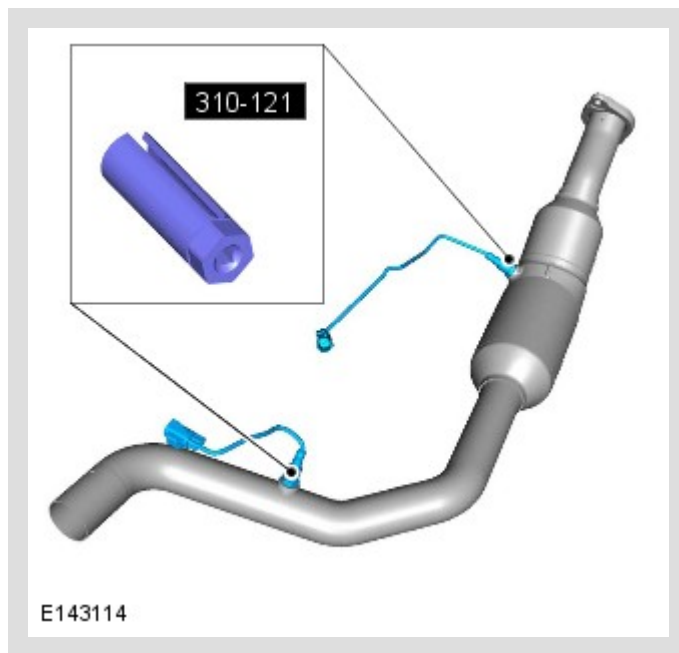

TORQUE: 48 Nm

INSTALLATION

1.

⚠ CAUTIONS:

- Make sure the anti-seize compound does not contact the heated oxygen sensor (HO2S) tip.
- If accidentally dropped or knocked install a new sensor.
- Make sure the HO2S wiring harness is not twisted more than 180 degrees and is not in contact with either the exhaust or driveshaft.

⚠ NOTE:

If the original sensor is to be installed, apply lubricant meeting specification ESE-M12A4-A to the thread of the sensor.

To install, reverse the removal procedure.