

PUBLISHED: 18-NOV-2013
2014.0 RANGE ROVER (LG), 303-12

INTAKE AIR DISTRIBUTION AND FILTERING - V8 S/C 5.0L PETROL

SUPERCHARGER SPRING ISOLATOR

(G1702576)

REMOVAL



CAUTION:

Make sure that all open ports are covered to prevent any foreign material ingress.



NOTE:

Some variation in the illustrations may occur, but the essential information is always correct.

1.



WARNING:


Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2.


Refer to: Supercharger (303-12D, Removal and Installation).

3.

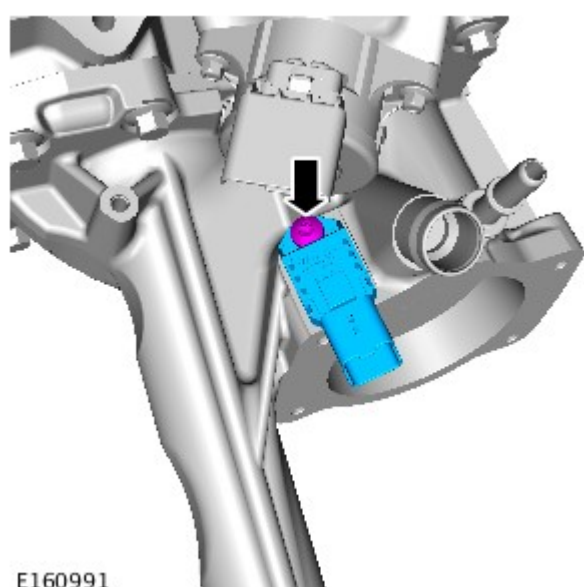


E160991

4.

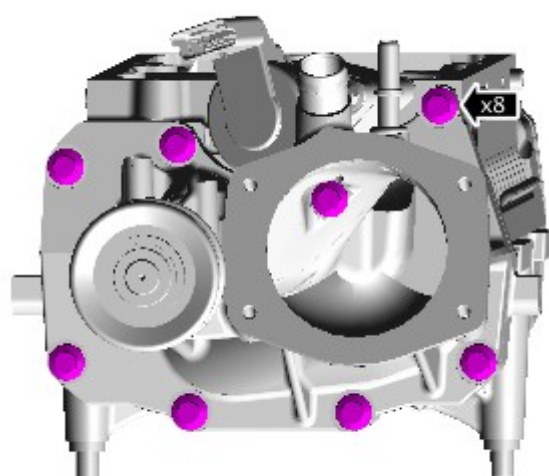

E160992

5.

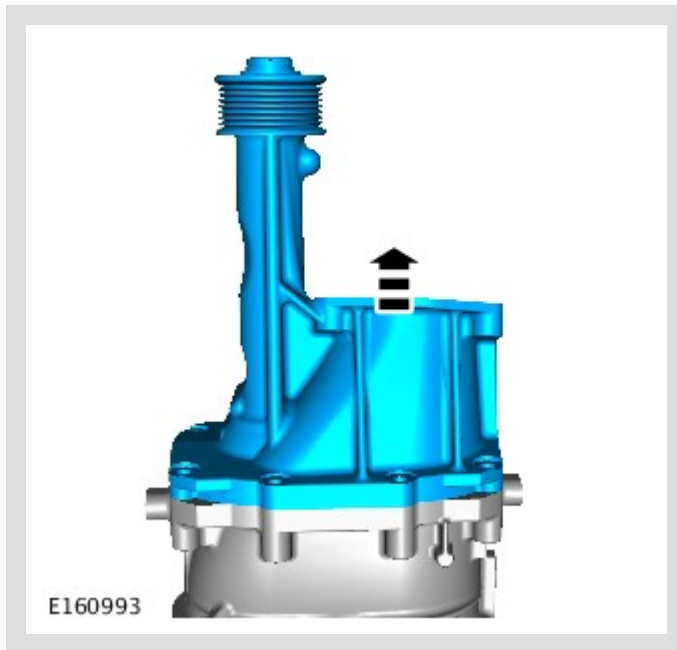


6.




CAUTION:

Make sure that all open ports are covered to prevent any foreign material ingress.

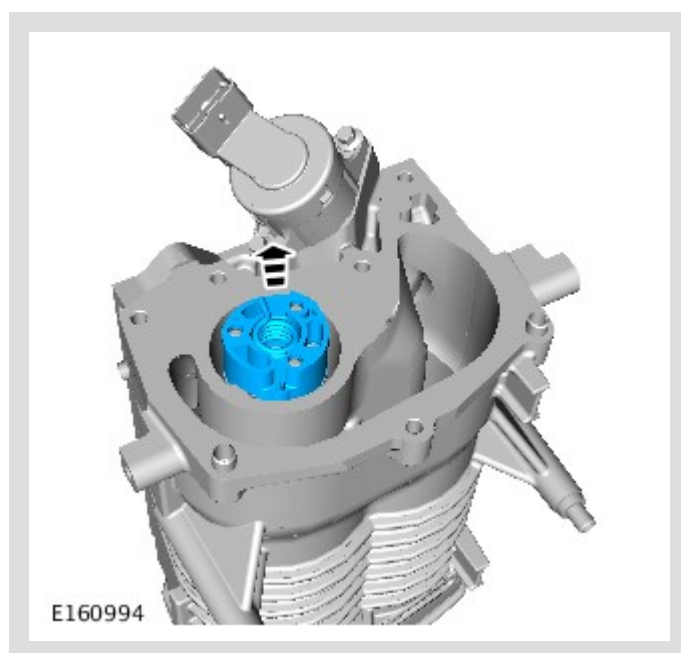

7.

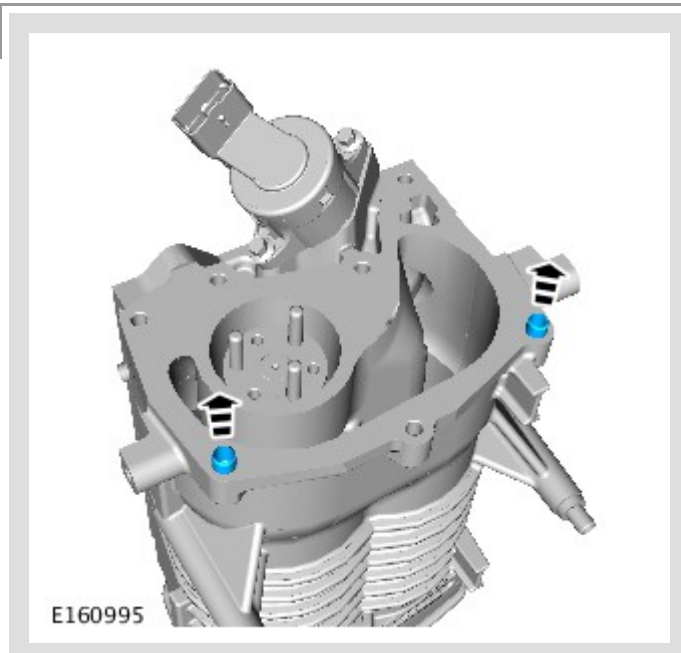


8.





CAUTION:

Make sure that all open ports are covered to prevent any foreign material ingress.

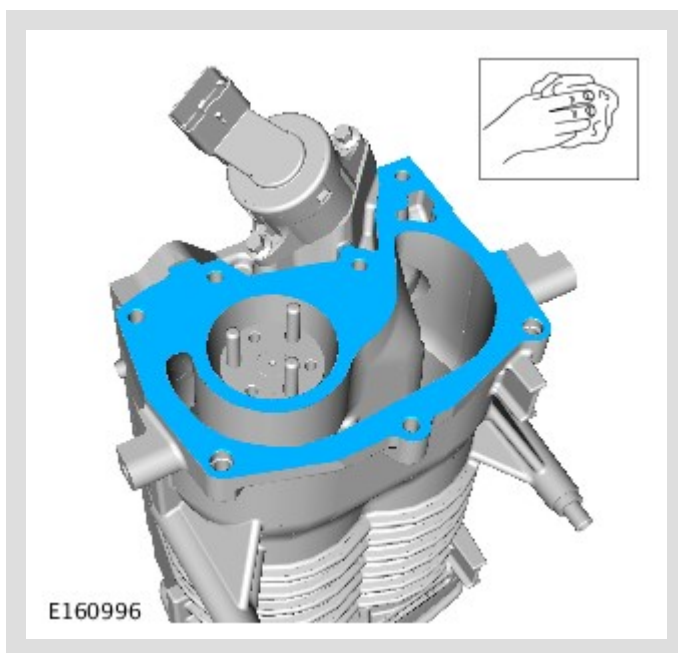


INSTALLATION

1.



CAUTION:

Make sure that all open ports are covered to prevent any foreign material ingress.

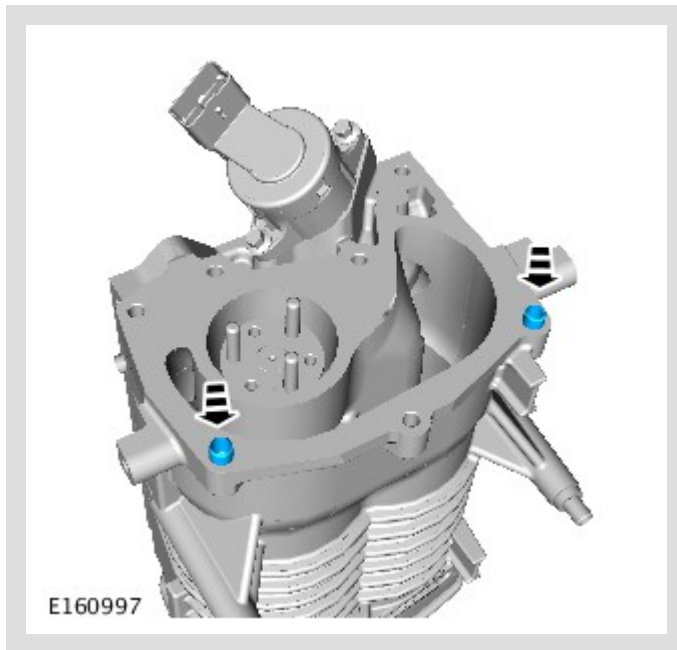


2.




CAUTION:


Apply a continuous bead of gasket sealant as shown on the illustration. The application of the sealant must be 1mm diameter. Install the component immediately after applying the sealant without smearing the sealant.

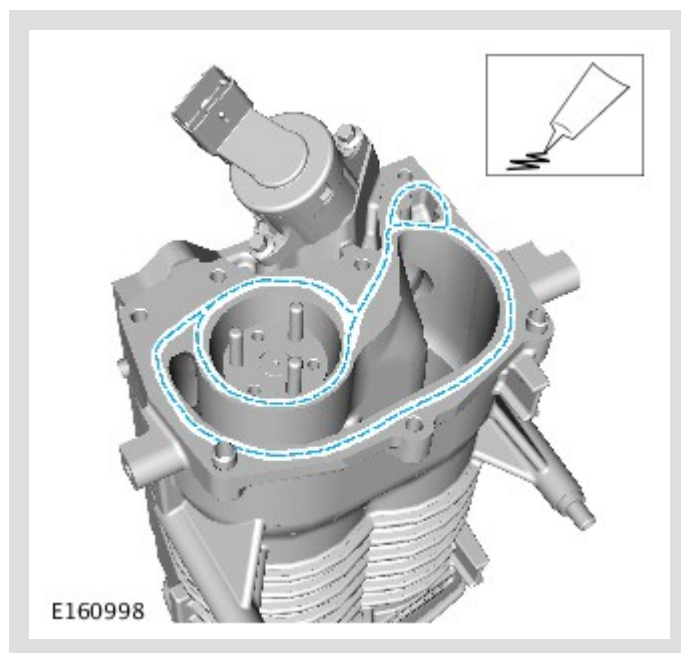


3.

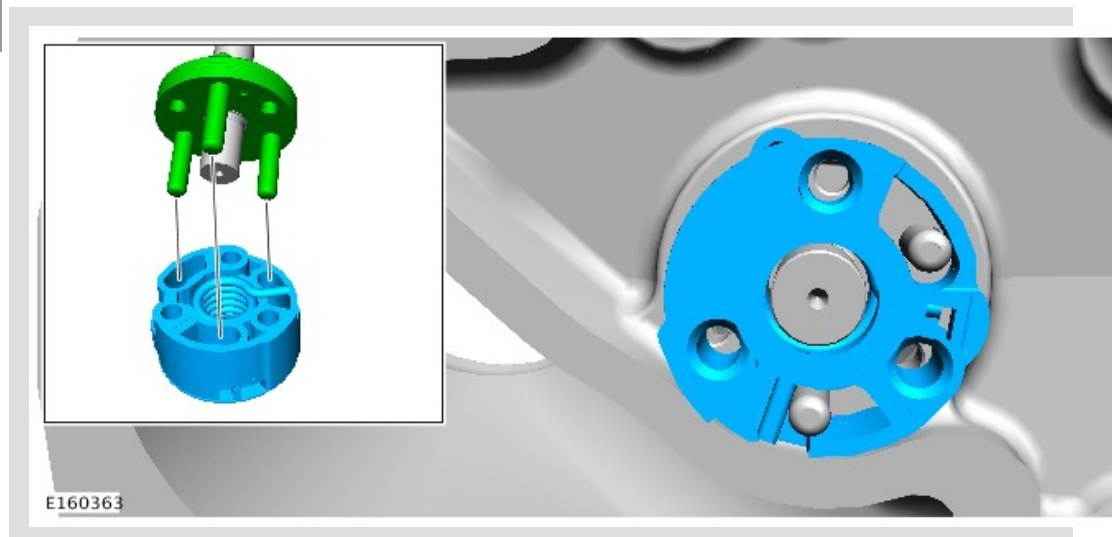

4.

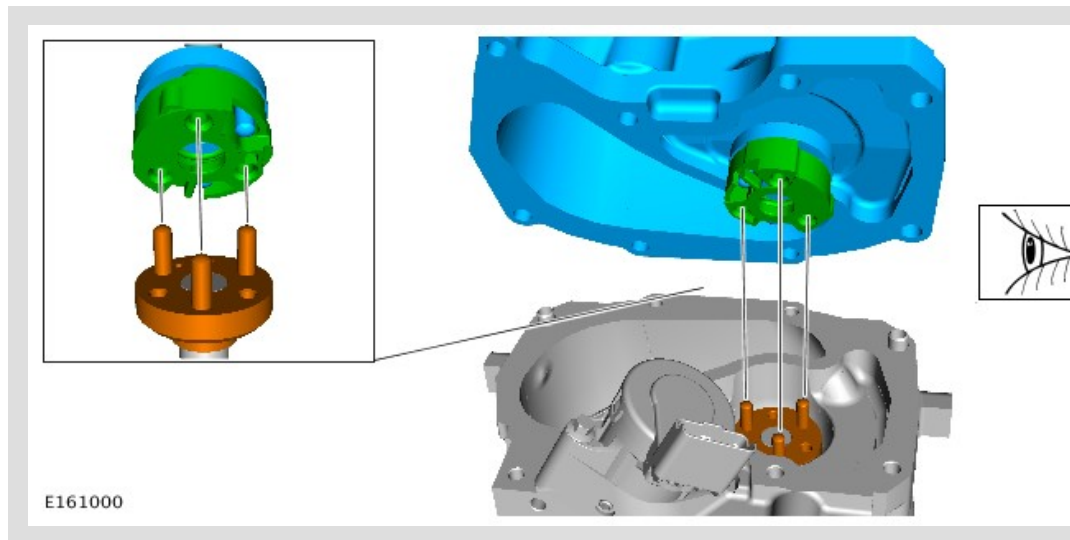


5.

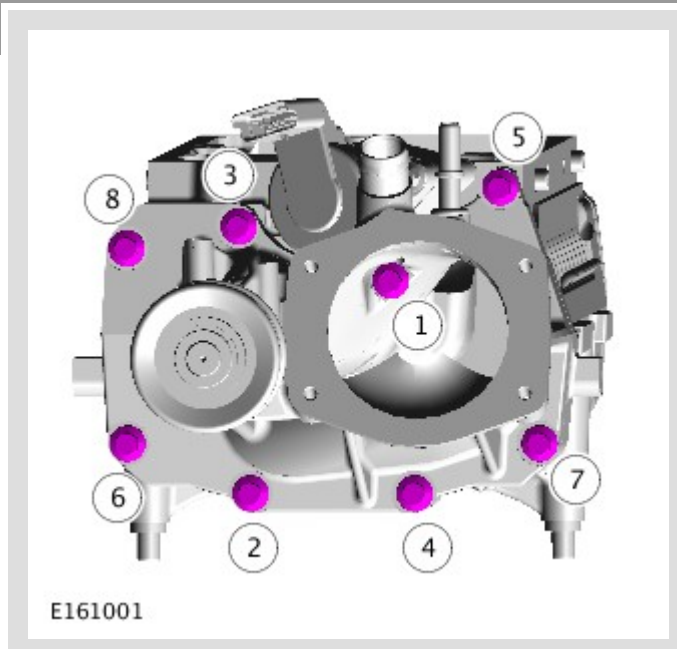

Torque: 27 Nm

6.

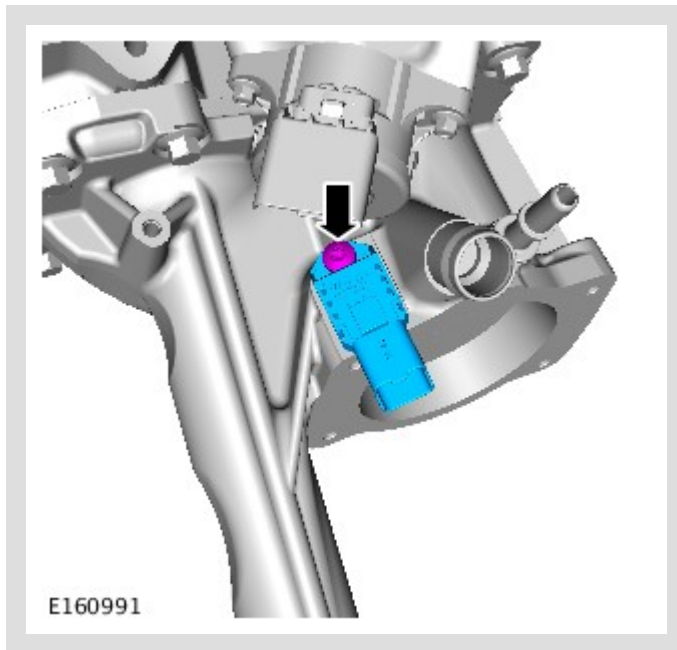

Torque: 5 Nm


7.

⚠ CAUTIONS:

- Make sure that spring resistance is felt in both directions of the pulley as shown.
- Make sure that all open ports are covered to prevent any foreign material ingress.

⚠ NOTE:

Supercharger rotors will appear polished, this is normal

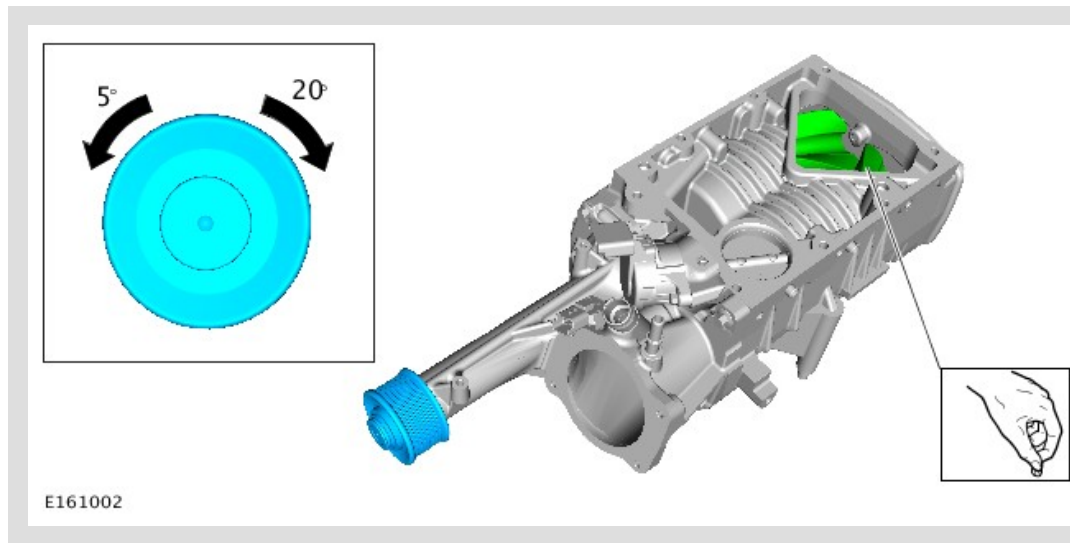

8. Refer to: Supercharger (303-12D, Removal and Installation).