

PUBLISHED: 29-APR-2013
2014.0 RANGE ROVER (LG), 303-06

STARTING SYSTEM - V8 N/A 5.0L PETROL/V8 S/C 5.0L PETROL

STARTER MOTOR (G1509500)

REMOVAL AND INSTALLATION

86.60.01	STARTER MOTOR - RENEW	5000 CC, AJ V8	0.7	USED WITHINS	
----------	-----------------------------	-------------------	-----	-----------------	--

REMOVAL

NOTES:

- Removal steps in this procedure may contain installation details.
- Some variation in the illustrations may occur, but the essential information is always correct.

1. Disconnect the battery ground cable.
Refer to: Specifications (414-00, Specifications).


2.

 **WARNING:**
Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

3. Refer to: Engine Undershield (501-02, Removal and Installation).

- 4.

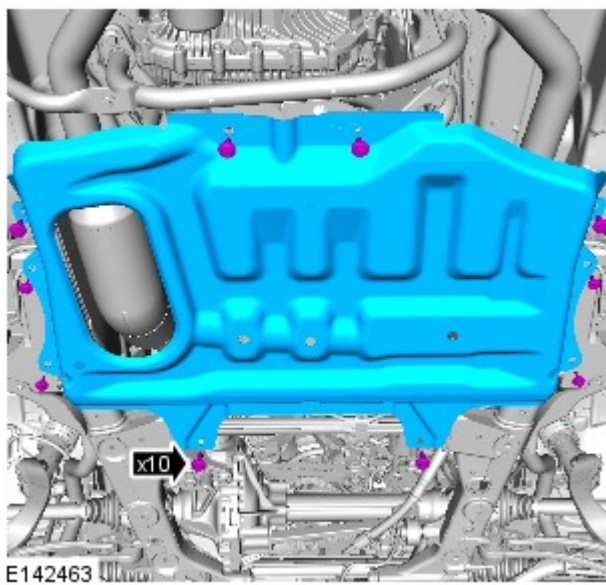

Torque:


M10 60 Nm

M6 10 Nm


5.

 NOTE:


If equipped with TSS.

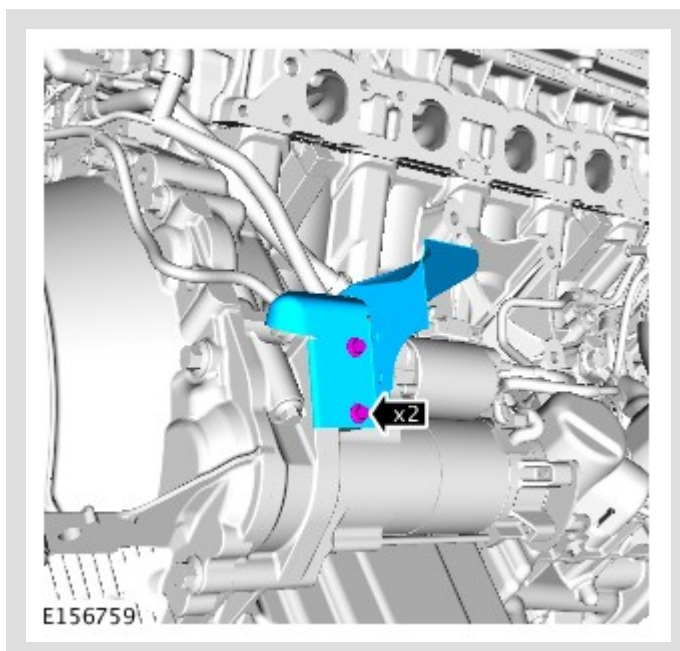


Torque: 6 Nm

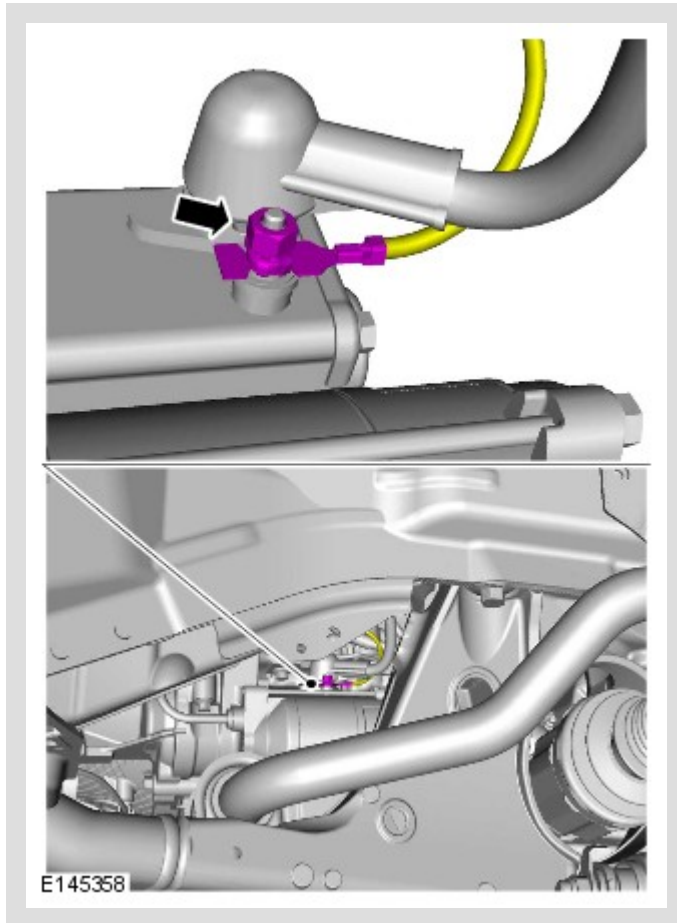

Torque: 7 Nm

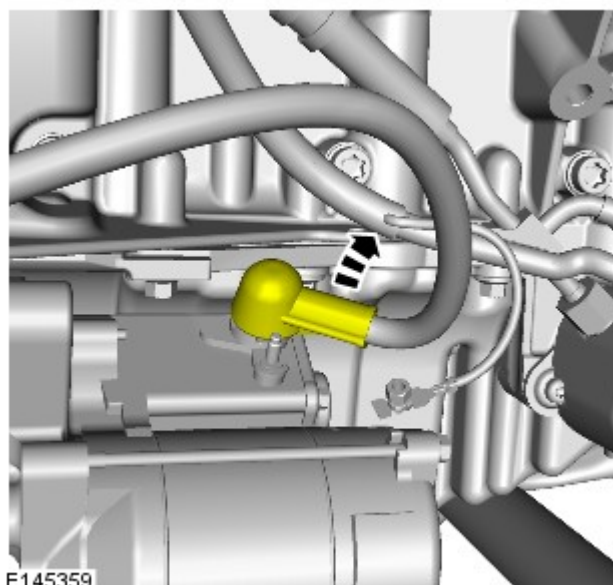

8.

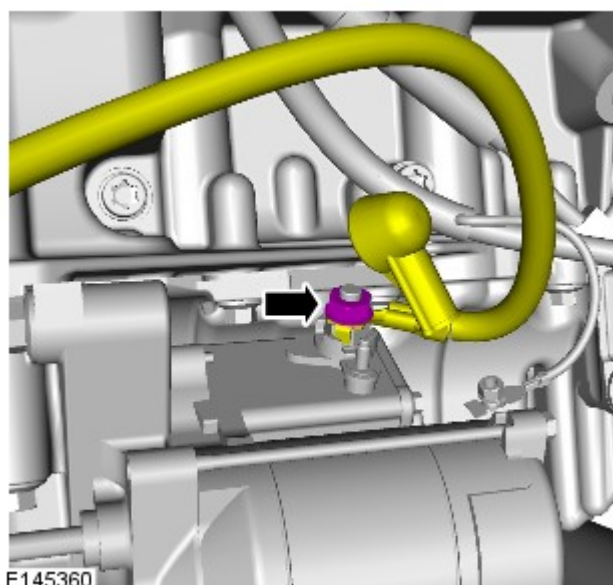


Torque: 10 Nm

9.

 **NOTE:**

If equipped with TSS.

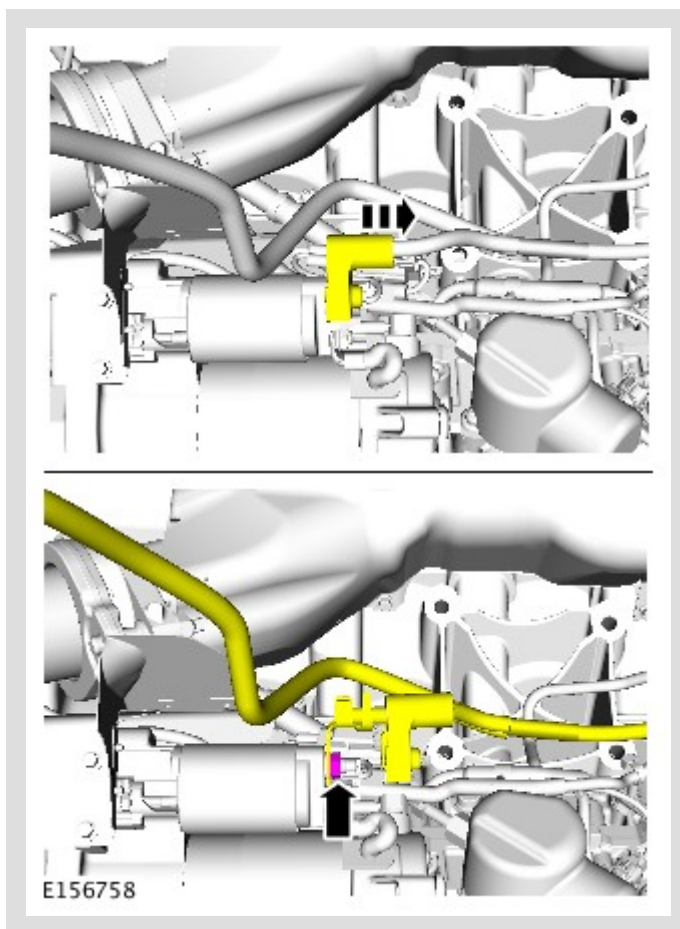


Torque: 10 Nm


10.

 **NOTE:**

If equipped with TSS.

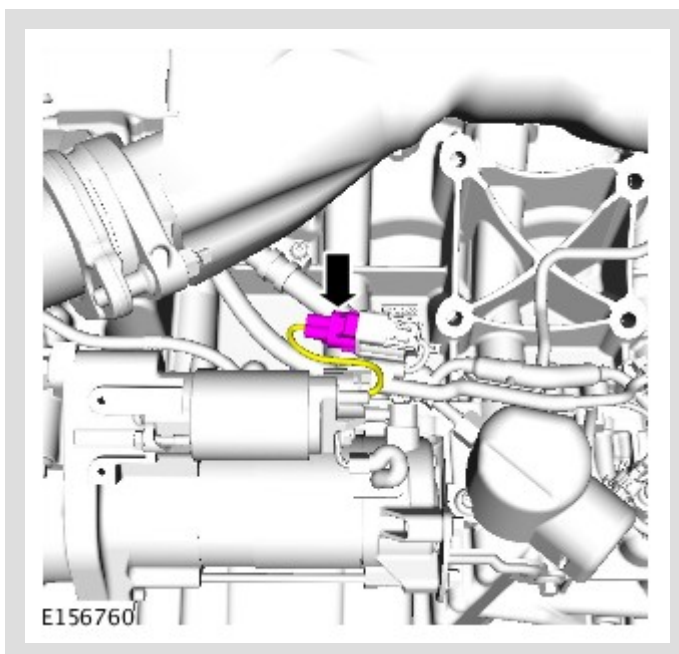


11.

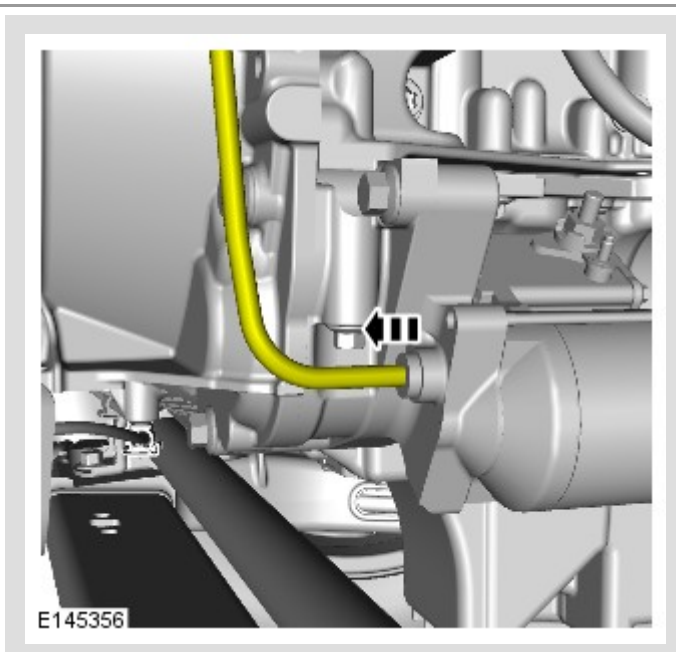

12.

 **NOTE:**


If equipped with TSS.

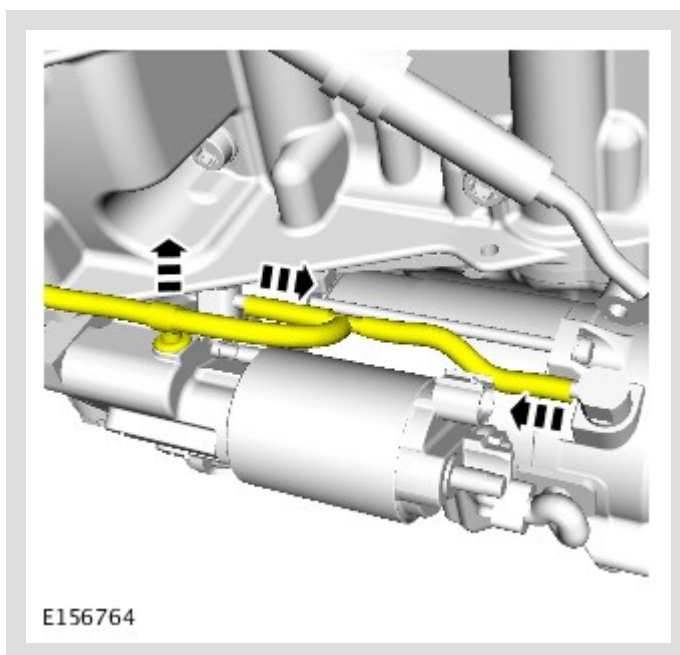

13.


 NOTE:

If equipped with TSS.

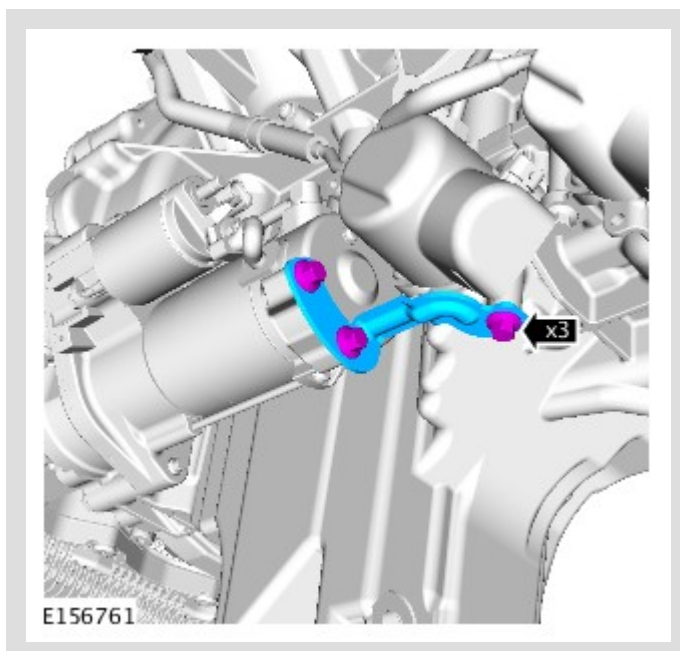

Torque: 47 Nm

14.

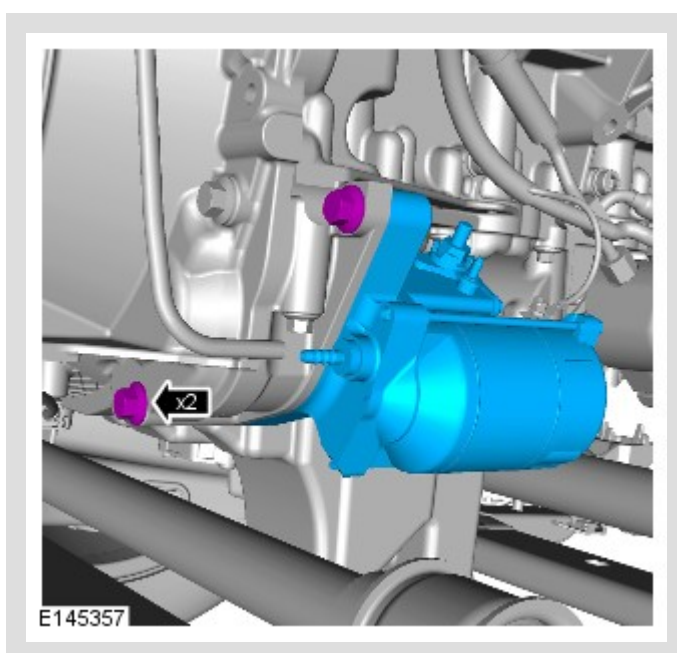

Torque: 47 Nm

INSTALLATION

1. To install, reverse the removal procedure.