

**TECHNICAL SERVICE BULLETIN****400 Watt DC/AC Inverter System Inoperative With B1330:9A In The BCM****26-2230**

24 June 2026

This bulletin supersedes 24-2443. Reason for update: Add/Remove/Update Vehicle Qualifiers/Models

Model:

Ford 2021-2025 F-150	Equipped with minor feature code HUKAJ (400 watt <u>DC/AC</u> inverter system with a pickup bed <u>AC</u> power outlet socket)
--------------------------------	--

Issue: This article supersedes TSB 24-2443 to update the vehicles affected. Some of the vehicles listed in the Model statement above equipped with the 400-watt direct current/alternating current DC/AC inverter system (minor feature code HUKAJ) with a pickup bed AC power outlet socket may exhibit inoperative power outlets with DTC B1330:9A stored in the BCM. This may be due to a connection issue at C4628.

NOTE: This article does not apply to vehicles with an inverter system other than the 400 watt DC/AC inverter system with a pickup bed AC power outlet socket.

Action: For vehicles that meet all of the criteria in the Issue and Model statements, follow the Service Procedure to inspect the connector and secure the harness.

Parts

Service Part Number	Claim Quantity	Package Order Quantity	Number in Package	Description
8U5Z- 14A163-E	1	1	1	Retainer
MU5Z-19A464-A	1	1	1	Aux Power Outlet (pick up bed)
XG-12	1	1	1	Electrical Grease
ML3Z-13A409-AAJ	1	1	1	Wire Harness
ML3Z-13A409-ADJ	1	1	1	Wire Harness
ML3Z-13A409-AGJ	1	1	1	Wire Harness
ML3Z-13A409-BAJ	1	1	1	Wire Harness
ML3Z-13A409-BBJ	1	1	1	Wire Harness
ML3Z-13A409-FAJ	1	1	1	Wire Harness
ML3Z-13A409-FBJ	1	1	1	Wire Harness
ML3Z-13A409-HAJ	1	1	1	Wire Harness
ML3Z-13A409-HBJ	1	1	1	Wire Harness
ML3Z-13A409-VAJ	1	1	1	Wire Harness
ML3Z-13A409-VCJ	1	1	1	Wire Harness
W716503-S300	2	1	4	retainer pin

Claim Quantity refers to the total number of individual pieces required to repair the vehicle. This may differ from the number of service part number packages due to the unit of issue (UOI).

As Needed indicates the part is necessary but amount of the part may vary and/or is not a whole number. Parts can be billed out as non-whole numbers, including less than 1.

Only If Necessary indicates the part is not mandatory. Refer to the Service Procedure to determine the inspection/inclusion criteria.

Warranty Status: Warranty coverage limits and policies are not altered by a TSB. Warranty coverage limits are determined by the identified causal part.

Labor Times

Description	Operation No.	Time
-------------	---------------	------

2021-2025 F-150, 2021-2025 F-150 Raptor/PowerBoost: Check DTCs, Disconnect C4628, Replace AC Power Outlet Socket Harness Retainer, Inspect Connector C4628, (Pass), Download And Run The BCM - Reset Battery Monitor Sensor Learned Values And BCM LIN New Module Initialization Check DTCs (Do Not Use With Any Other Labor Operations)	262230A	0.6 Hrs.
2021-2025 F-150: Check DTCs, Disconnect C4628, Replace AC Power Outlet Socket Harness Retainer, Inspect Connector C4628, (Fail), Replace Outlet Socket Assembly And 13A409 Body Harness Assembly, Download And Run The BCM - Reset Battery Monitor Sensor Learned Values And BCM LIN New Module Initialization Check DTCs (Do Not Use With Any Other Labor Operations)	262230B	1.7 Hrs.
2021-2025 F-150 Raptor: Check DTCs, Disconnect C4628, Replace AC Power Outlet Socket Harness Retainer, Inspect Connector C4628, (Fail), Replace Outlet Socket Assembly And 13A409 Body Harness Assembly, Download And Run The BCM - Reset Battery Monitor Sensor Learned Values And BCM LIN New Module Initialization Check DTCs (Do Not Use With Any Other Labor Operations)	262230C	2.2 Hrs.
2021-2025 F-150 3.5L PowerBoost: Check DTCs, Disconnect C4628, Replace AC Power Outlet Socket Harness Retainer, Inspect Connector C4628, (Fail), Replace Outlet Socket Assembly And 13A409 Body Harness Assembly, Download And Run The BCM - Reset Battery Monitor Sensor Learned Values And BCM LIN New Module Initialization Check DTCs (Do Not Use With Any Other Labor Operations)	262230D	1.9 Hrs.

Repair/Claim Coding

Causal Part:	19A464
Condition Code:	43


PDR Table

PDR Code	Description	Time
TSB262230A	2021-2025 F-150, 2021-2025 F-150 Raptor/PowerBoost: Check DTCs, Disconnect C4628, Replace AC Power Outlet Socket Harness Retainer, Inspect Connector C4628, (Pass), Download And Run The BCM - Reset Battery Monitor Sensor Learned Values And BCM LIN New Module Initialization	0.6 Hrs.
TSB262230B	2021-2025 F-150: Check DTCs, Disconnect C4628, Replace AC Power Outlet Socket Harness Retainer, Inspect Connector C4628, (Fail), Replace Outlet Socket Assembly And 13A409 Body Harness Assembly, Download And Run The BCM - Reset Battery Monitor Sensor Learned Values And BCM LIN New Module Initialization Check DTCs	1.7 Hrs.
TSB262230C	2021-2025 F-150 Raptor: Check DTCs, Disconnect C4628, Replace AC Power Outlet Socket Harness Retainer, Inspect Connector C4628, (Fail), Replace Outlet Socket Assembly And 13A409 Body Harness Assembly, Download And Run The BCM - Reset Battery Monitor Sensor Learned Values And BCM LIN New Module Initialization Check DTCs	2.2 Hrs.
TSB262230D	2021-2025 F-150 3.5L PowerBoost: Check DTCs, Disconnect C4628, Replace AC Power Outlet Socket Harness Retainer, Inspect Connector C4628, (Fail), Replace Outlet Socket Assembly And 13A409 Body Harness Assembly, Download And Run The BCM - Reset Battery Monitor Sensor Learned Values And BCM LIN New Module Initialization Check	1.9 Hrs.

Service Procedure


1. Disconnect connector C4628 and remove the pickup bed AC power outlet socket harness retainer from the body located in Figure 1.

Figure 1

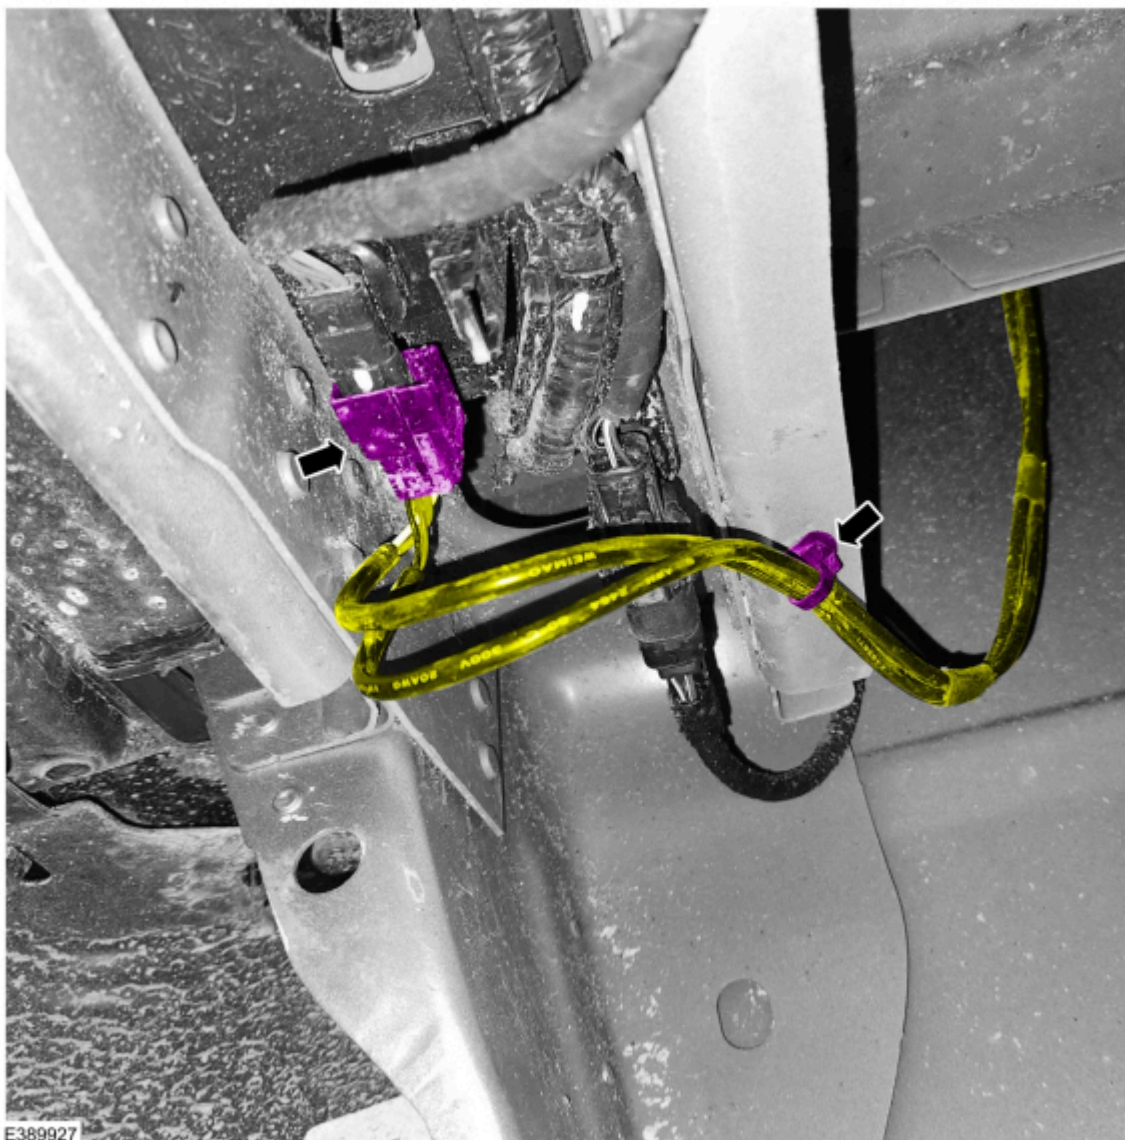

2. Using a suitable tool, carefully cut and remove the pickup bed AC power outlet socket harness retainer from the pickup bed AC power outlet socket harness. Discard the retainer.
3. Is the vehicle a Raptor?
 - (1). Yes - proceed to Step 4.
 - (2). No - proceed to Step 7.
4. For Raptor vehicles, inspect connector C4628 for the presence of corrosion, dirt and/or damage. Is corrosion, dirt and/or damage present in connector C4628? (Figure 2)

Figure 2

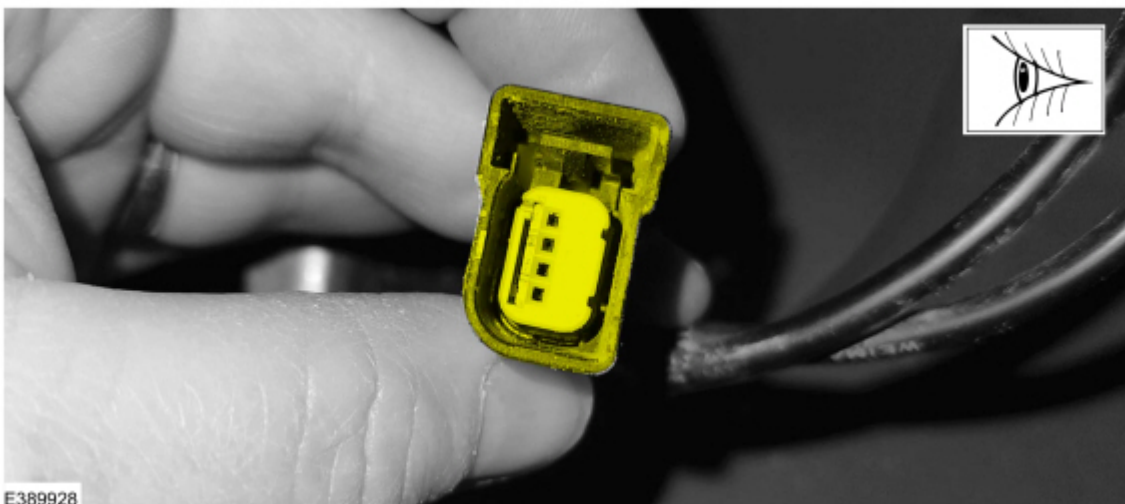

- (1). Yes - proceed to Step 5.

(2). No - proceed to Step 8.

5. Replace the pickup bed AC power outlet socket assembly. Refer to WSM, Section 414-05. Proceed to Step 6.

6. Replace the body side harness assembly (13A409) of connector C4628. To gain access to the body side harness assembly (13A409), remove the left pickup bed lower moulding. Refer to WSM, Section 501-08 Exterior Trim and Ornamentation > Removal and Installation > Rear Quarter Panel Moulding. Then remove the three rearmost screws and the four rearmost retainers from the left rear fender moulding. (Figures 3-4) This will allow sufficient access to the remainder of the body side harness assembly (13A409). (Figure 5) Proceed to Step 8.

Figure 3

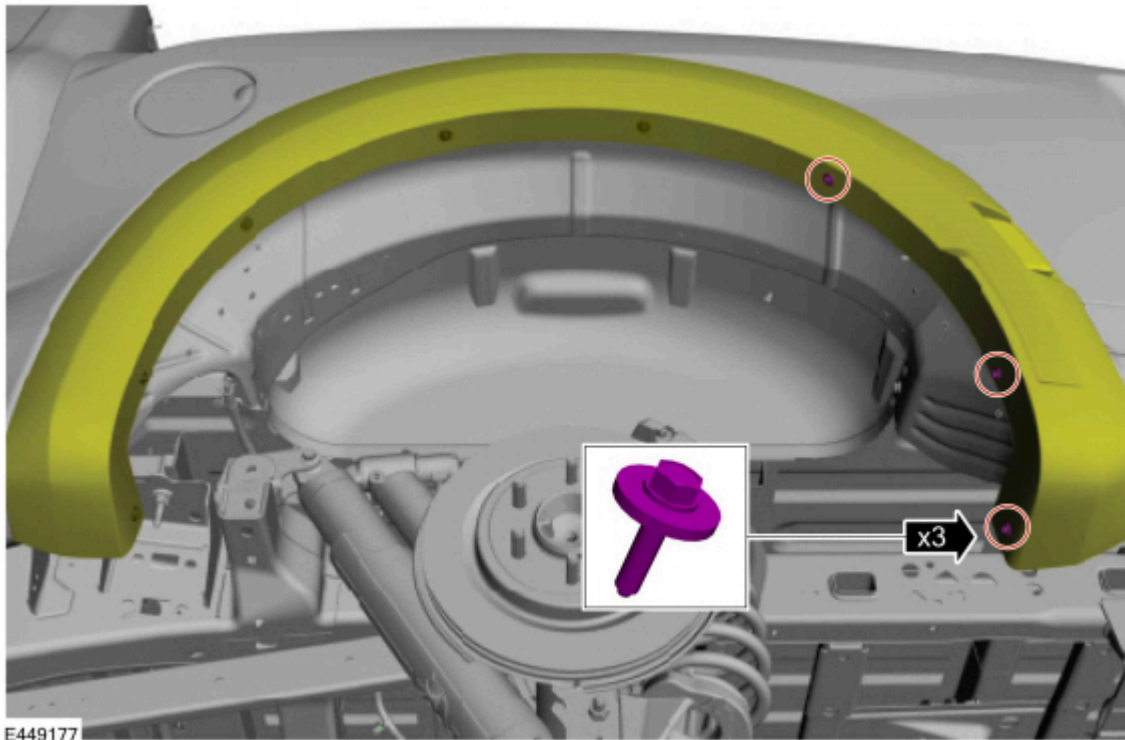


Figure 4


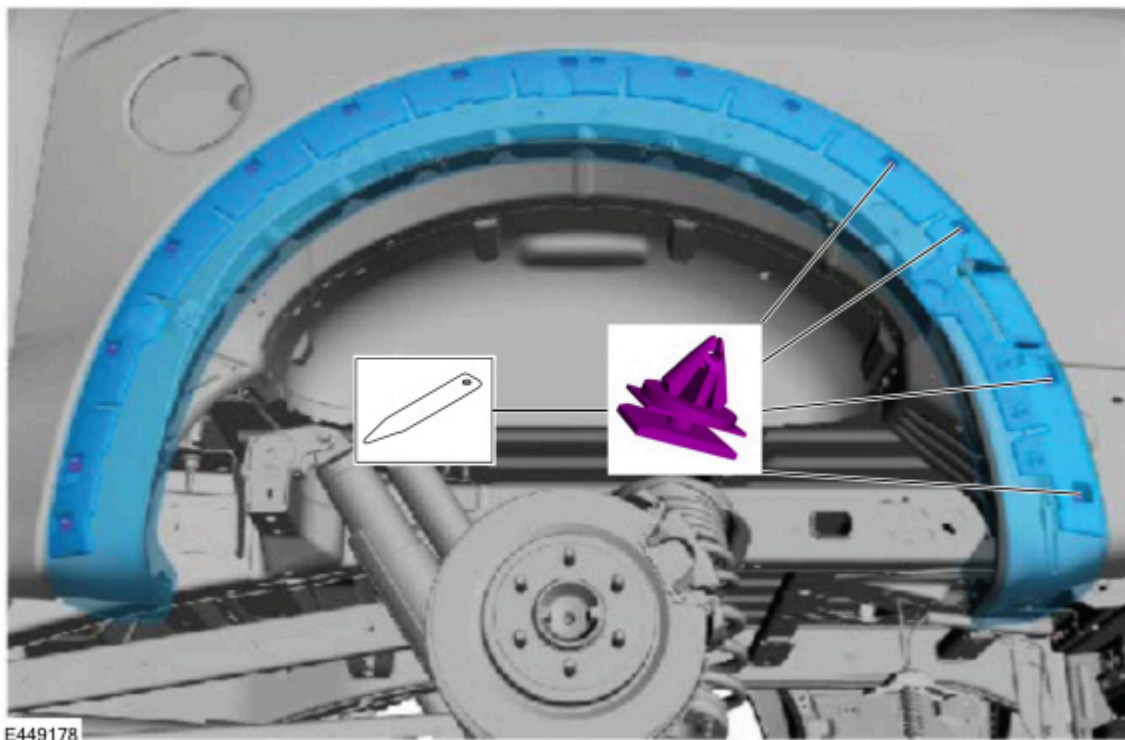


Figure 5

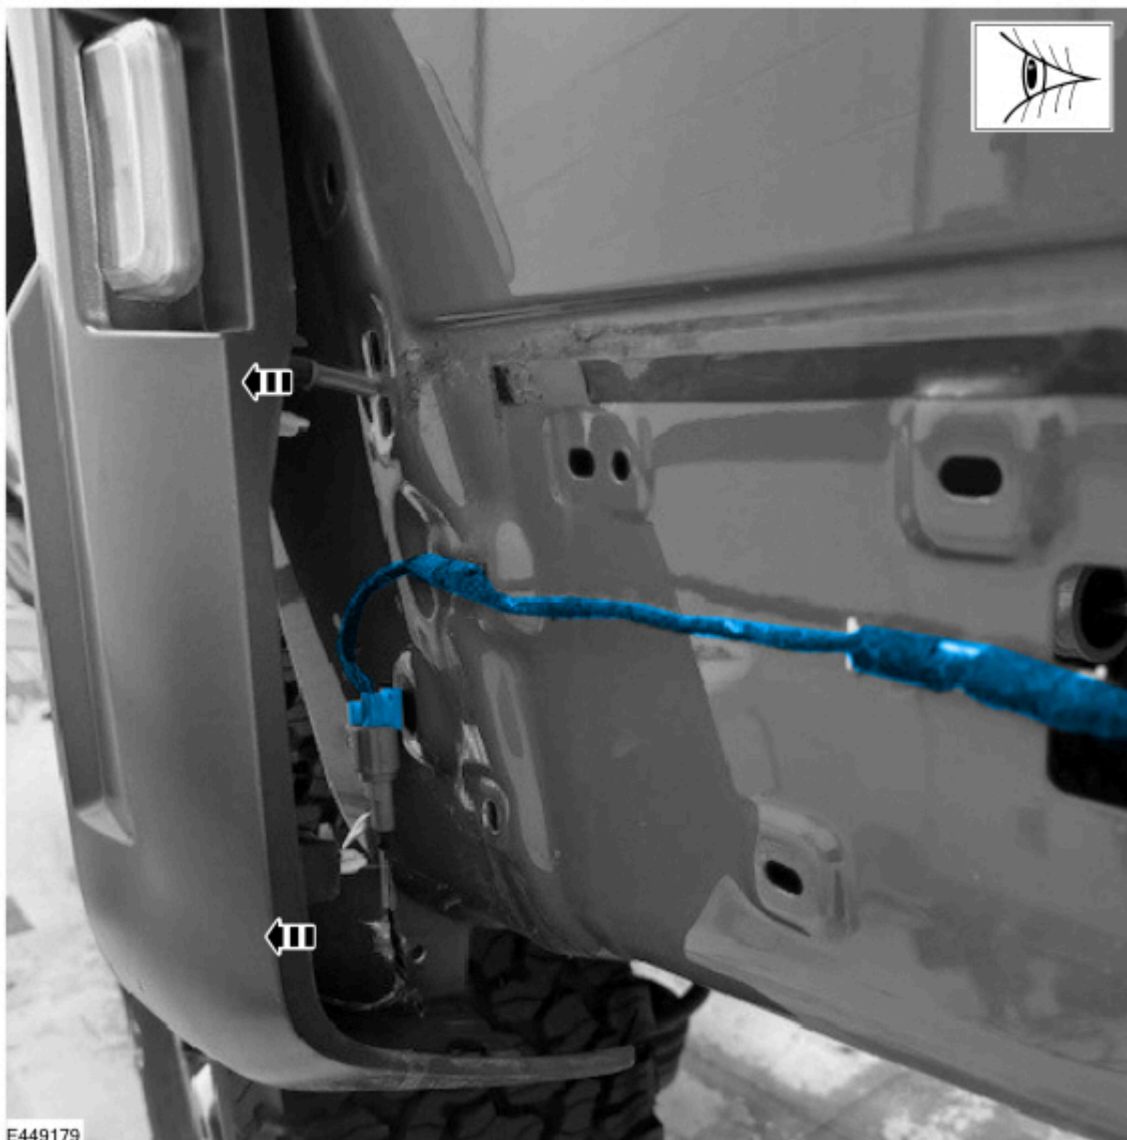


7. Inspect connector C4628 for the presence of corrosion, dirt and/or damage. Is corrosion, dirt and/or damage present in connector C4628? (Figure 2)

(1). Yes - replace the pickup bed AC power outlet socket assembly. Refer to WSM, Section 414-05. Replace the body side harness assembly (13A409) of connector C4628. Proceed to Step 8.

(2). No - proceed to Step 8.

8. Install a new pickup bed AC power outlet socket harness retainer 4.3 in. (110 mm) from the back of the pickup bed power outlet harness connector. If the pickup bed AC power outlet socket has been replaced, remove and discard the factory-installed harness retainer and install the new harness retainer. (Figure 6)


Figure 6

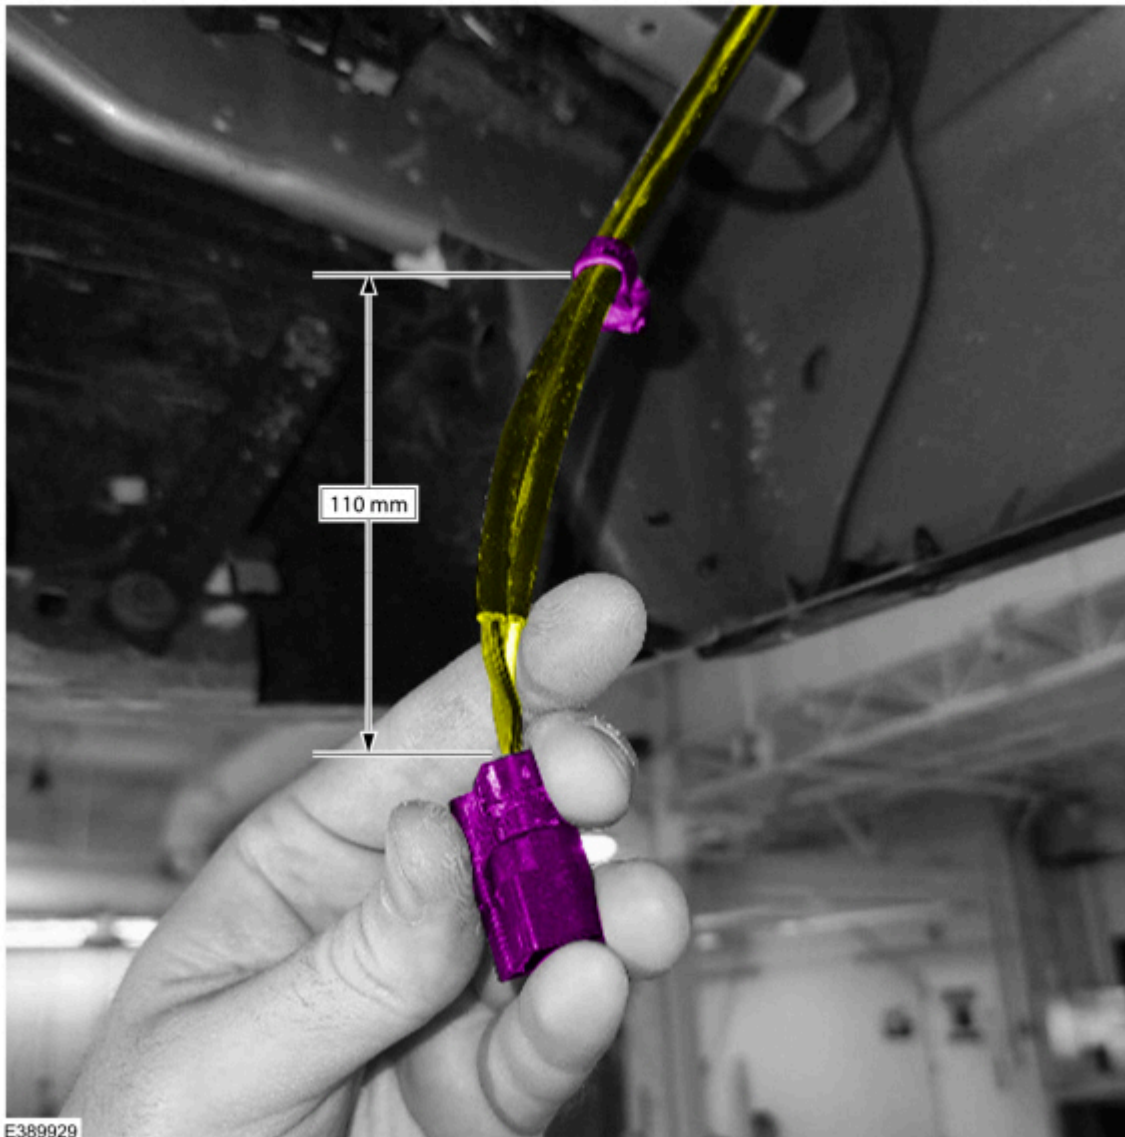

E389929

9. Apply Motorcraft® Electrical Grease to the pickup bed AC power outlet socket connector and reconnect to the C4628 bodyside harness. Secure the harness retainer to the body. (Figure 7)

Figure 7

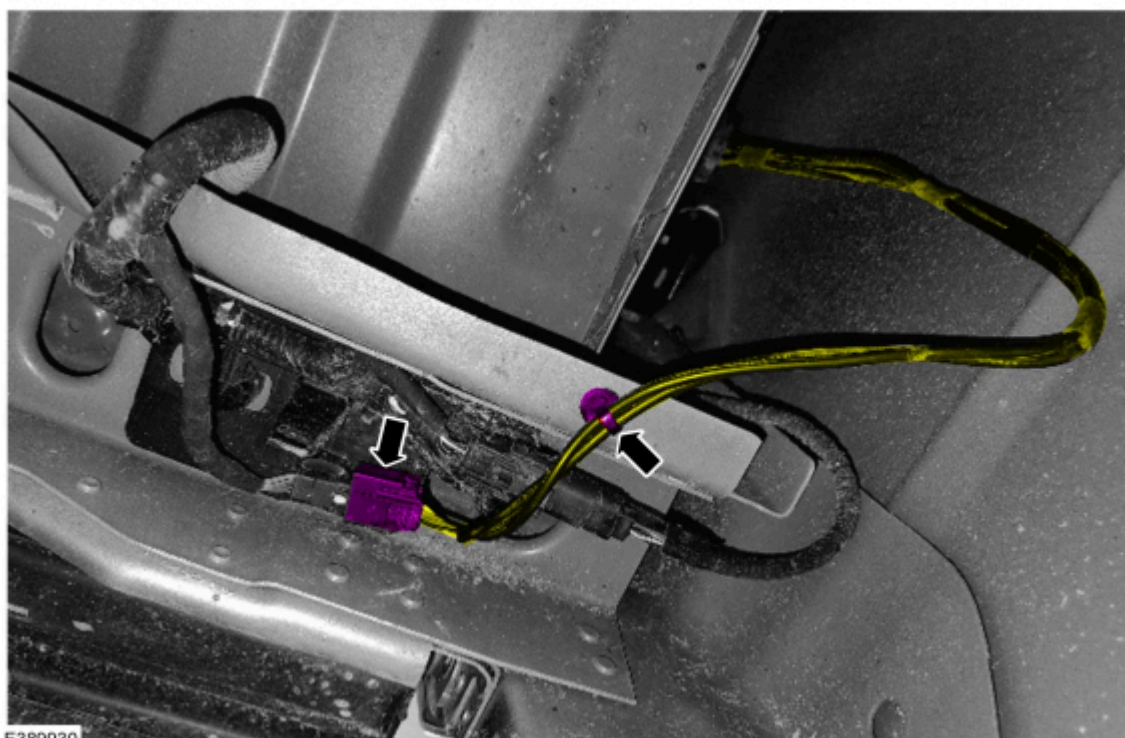

E389930



CAUTION: The bend radius of the pickup bed AC power outlet socket harness should be no less than 4 mm. Hard kinks and tight bends of the pickup bed AC power outlet socket harness can lead to wire damage.

10. Fold approximately 7 in. (185 mm) of the remaining/loose pickup bed AC power outlet socket harness in 2 bends just behind the pickup bed AC power outlet socket panel. Secure the folded wire with a wire tie. Inspect the routing of the harness to make sure it is not pulled too tight against the body sheet metal near the harness retainer and provides just enough length. (Figure 8)

Figure 8



11. Tightly compress the bends and completely wrap the folded pickup bed AC power outlet socket harness section with anti-abrasion electrical tape. (Figure 9)

Figure 9



12. Download and run the "BCM - Reset the Battery Monitoring Sensor Learned Values" application and then the "BCM - Local Interconnect Network (LIN) New Module Initialization" in the FDRS to relearn the DCACA outlet configuration and retest. If DTC B1330:9A persists, continue with normal diagnostics in the WSM, Section 414-05.

© 2026 Ford Motor Company

All rights reserved.

This bulletin represents technical service information only. Without exception all gratis repairs and replacements are subject to the individual warranty and policy procedures of the supervisory Ford Company. The illustrations, technical information, data and descriptive text in this issue, to the best of our knowledge, were correct at the time of publication.