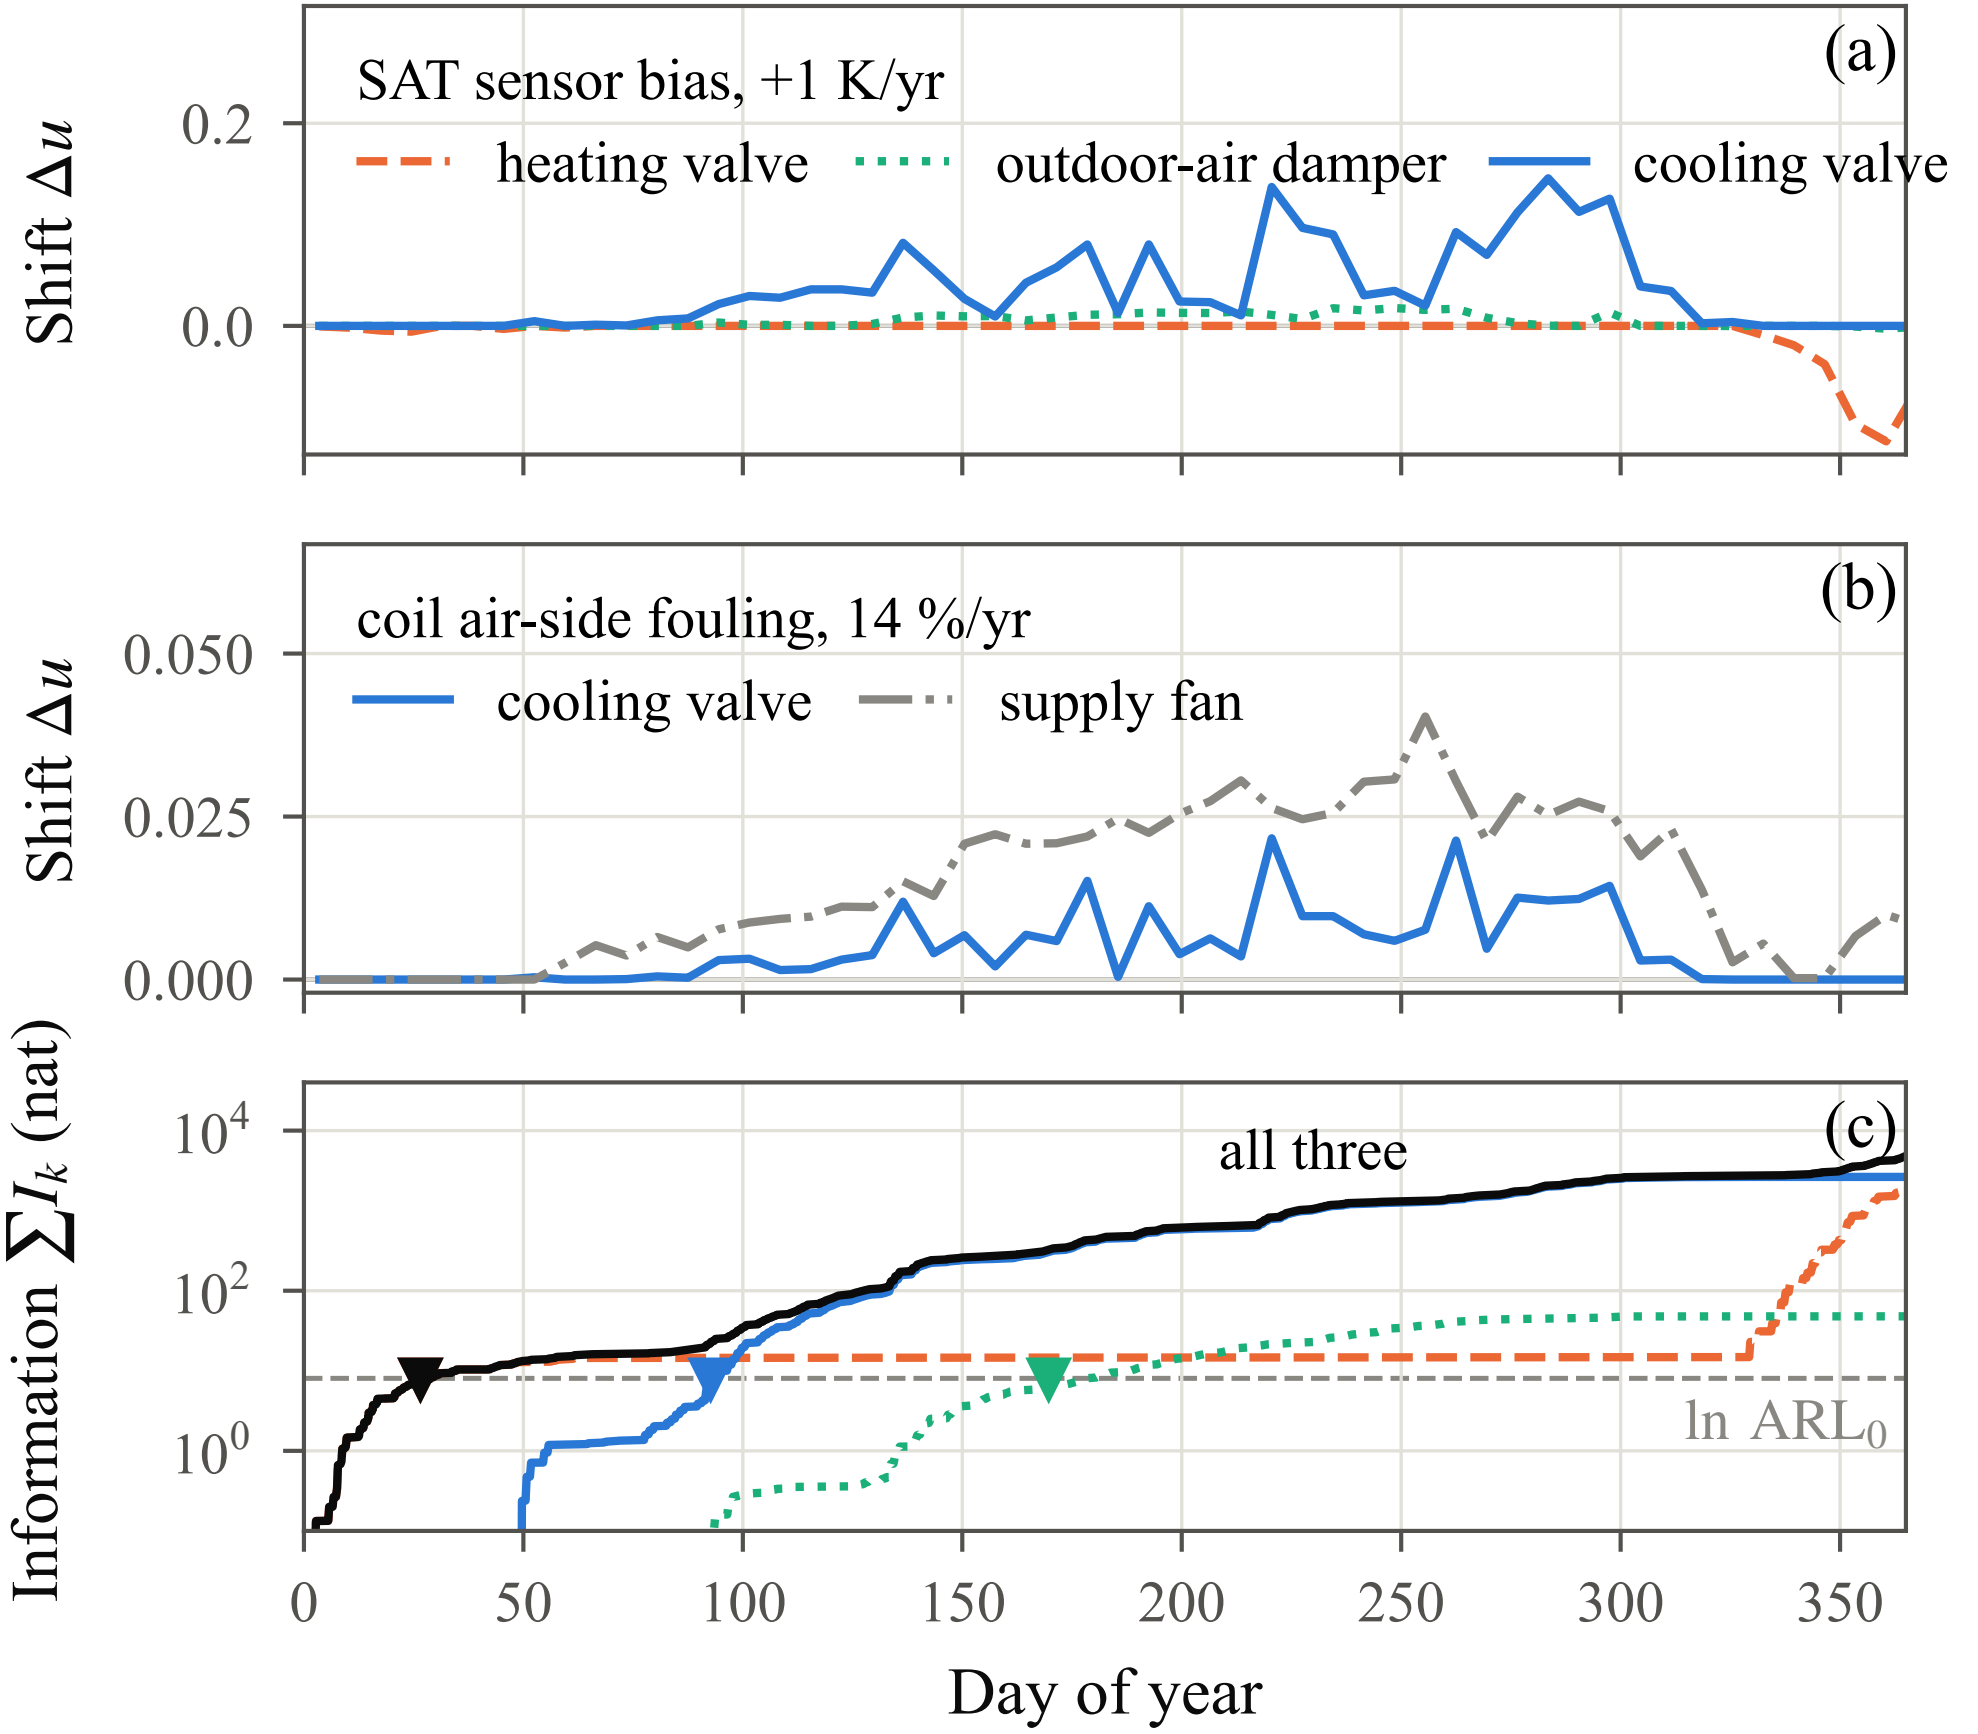
(a)
SAT sensor bias, +1 K/yr
heating valve
outdoor-air damper
cooling valve
Shift Δu
0.2
0.0
(b)
coil air-side fouling, 14 %/yr
cooling valve
supply fan
Shift Δu
0.050
0.025
0.000
(c)
all three
ln ARL_0
Information $\sum I_k$ (nat)
10^4
10^2
10^0
0
50
100
150
200
250
300
350
Day of year