

Project Report for Panoramic Photo Generation

Yuanbo Han, Zhoubao Mai, Yujia Zhang, Ruiqi Zhou

Paper ID 14

Keywords: key frame selection, scale invariant feature transform, random sample consensus, cylindrical projection, image blending

1 Introduction

Panoramic photo generation is emphasized by the desire to get an overview of landscape and the restriction that camera's field of view is too small to be capable of capturing all-around view over the entire horizon. Thus, panoramic photography became popular in the 19th century [1], and has been further promoted by the applications in computer vision and computer graphics nowadays. During the development of panoramic photography, swing lens and spherical fish-eye lens are invented successively [2]. Omni-directional camera is also utilized for panoramic photography while compromising image resolution [3]. The generation of digital camera deals with the shortcomings of these approaches, such as lens distortion and low resolution. Besides, there are existing studies of geometry modeling, camera calibration and feature matching. So, it is possible to explore a practical method to generate panoramic images from a simple digital camera and stitching methods, which is applicable for daily uses. This report demonstrates techniques for generating a cylindrical panoramic image based on an all-around video taken by an ordinary digital camera without wide-range capability. The procedure involves key frame selection, cylindrical projection, image registration, homography transformation and image wrapping, blending and cropping. A discussion is conducted based on the observation of the experiment results and potential future work.

2 Related Work

Many techniques have been proposed to solve image registration so that the panoramic image can be generated from an image sequence. These algorithms are illustrated chronologically, in which different levels of the feature are used for registration. Sequential Similarity Detection algorithms (SSDAs) compare image pixel values to deal with translational registration problem [4]. Correlation methods are employed to determine the similarity, and the sequential search would terminate before exhausted iteration on each pixel, reducing the computational complexity. However, SSDAs are not adaptive to magnification and rotation transformation. Therefore it has limited applications.

Image registration using features in the frequency domain is developed to solve translation and rotation in panoramic photography [5]. Fourier transformations from the time domain to frequency domain are conducted on both images

045 to be stitched together, then the ratio between them is calculated. Determination
 046 of rotation angle uses the form of this ratio in polar coordinates and
 047 simplifies it once appropriate rotation angle is found. Then the translation can
 048 be determined by phrase correlation methods. Fourier Transform has the cor-
 049 responding counterpart for translation, rotation and scale, therefore has broad
 050 applications in image registration. Besides, Fast Fourier Transform provides an
 051 efficient solution.

052 Low-level features like corners or edges are referred to as control points
 053 and used to determine transformation functions in image registration [6]. Con-
 054 trol points are selected based on their numeric features. In the application of
 055 panoramic photography, geometry distortion is inevitable. Thus, global trans-
 056 formation functions, e.g., least-squares method are inappropriate due to the in-
 057 sensitivity of a local property. Approximation methods are then proposed to
 058 register images with local geometric difference, including weighted least-squares
 059 and local weighted mean methods, meanwhile introducing much computation
 060 complexity. Therefore, the researchers carried out a practical image registration
 061 using the weighted least-squares method with orthogonal polynomial to reduce
 062 the equations to be solved.

063 A successful attempt to eliminate the restriction on motion parallax is in-
 064 troduced [7]. The Rotation matrix is utilized for image registration instead of
 065 cylindrical or spherical coordinates to solve singularity problems, meanwhile,
 066 “gap closing” technique is developed to deal with error accumulation. Degree
 067 of “mis-registration” can be obtained by calculating rotation matrices difference
 068 (quotient), and is converted into gap angle to update focal length after construct-
 069 ing the panoramic photography. Moreover, “block adjustment” is employed to
 070 update rotation matrix and focal length simultaneously for further optimization.

071 3 Approach

072 3.1 Key Frame Selection

073 Key frame selection and extraction are served as preprocessing for panoramic
 074 photography. VideoCapture object is created to capture the live stream from
 075 the video file and every frame is included in the stream [8]. Hence, there is
 076 a large number of frames in the stream and these consecutive frames contain
 077 significant overlap with their neighbors. Stitching frames on the raw stream
 078 will be too time-consuming without acquiring noticeable information. In other
 079 words, the performance will be upgraded in many aspects if key frames can be
 080 extracted [9]. The first frame is chosen by default and the following frames are
 081 selected based on the number of matched descriptors between itself and the last
 082 selected key frame. Too many matched descriptors indicates the candidate frame
 083 is quite similar with the last selected one, thus cannot provide much progress
 084 for panoramic generation. On the contrary, if the two successively selected key
 085 frames have too few matched descriptors, the performance of feature detection is
 086 likely to be lessened in the next stage. In the implementation, upper bound and
 087 lower bound are prescribed for the number of matched descriptors to determine

key frame selection. Only the frames of appropriate degree of overlap with the last selected frame would be extracted. Detecting areas are both two thirds of the total frames, because this is the fraction of the overlapping part over the entire canvas in experiment.

3.2 Feature Detection and Matching

Features are detected and matched between adjacent key frames to estimate homography matrix, which is used for image wrapping in the next procedure. Since key frames can be captured in different views, a reliable matching method should depends on invariant feature extraction. Scale Invariant Feature Transform (SIFT) is proposed to extract local features that are invariant to image scale, rotation and change in 3D viewpoint [10]. Four stages are implemented accordingly in SIFT algorithm. Scale-space extrema detection uses Difference-of-Gaussian to search local features in different locations with different scales, leading to the extracted feature invariant of scale and location. Key point localizations and orientation assignments assign the locations, scales and orientations of the candidate key points, which are used in the descriptors to guarantee transformation invariance. Keypoint descriptor is generated to describe local image gradients, so it is highly distinctive.

Feature matching is carried out based on these key points and descriptors. Brute-Force matcher computes L2 distance (Euclidean distance) exhaustively between all feature vectors from both images and find the pairs of descriptors that have the smallest distance. To eliminate false-positive in the raw match from Brute-Force matcher, David Lowe's ratio (which is 0.6 in the implementation) is used to select valid match, whose distance is less than 0.6 times the distance of the second best nearest neighbor. Example of key points' matching is illustrated in Fig. 1.

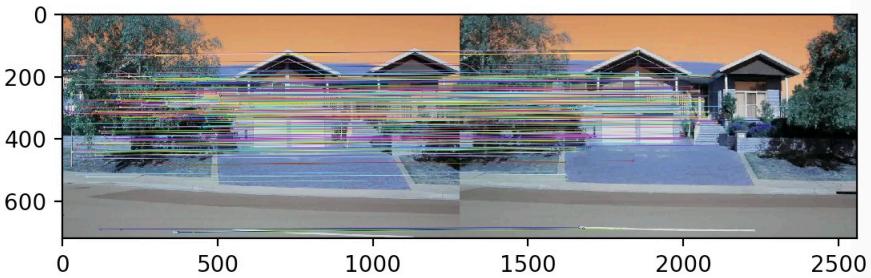


Fig. 1. Example of SIFT Matching

However, it is not easy to find a proper David Lowe's ratio. When increasing the ratio, there will be lots of mismatched points. When reducing the ratio, the

number of mismatched points will decrease, but so is the number of matching points. One way to deal with this problem is to find a robust estimation method to eliminate the mismatches. In practice, Random Sample Consensus (RANSAC) algorithm is applied to classify the correct matching points from mismatches. As a matter of fact, there is great robustness in RANSAC algorithm including the ability to handle sparse and multiple structured data.

3.3 Image Wrapping

Given the homography matrix H derived from the matched feature vectors, stitch new frame to the image composed of previous frames, until finally the panoramic image is accomplished. Since using planar homography will result in a vertical distortion if the rotation angle of camera is above 120 degrees, a cylindrical projection should be applied to the new key frame before computing homography matrix. As the project assumes the camera is level and only rotates around the vertical axis, images only need translation transform after applying cylindrical projection. The formula for cylindrical projection is shown below, where the cutting-point of the cylindrical plane and flat plane is the origin point. x_p and y_p represent planar coordinates, x_c and y_c represent cylindrical coordinates respectively, f is the focal length of camera, and α is the angle between the line from cylinder center to the cutting-point and the line from cylinder center to the examining point.

$$\alpha = \arctan \frac{x_p}{f} \quad (1)$$

$$x_c = f\alpha \quad (2)$$

$$y_c = y_p \cos \alpha \quad (3)$$

A cylindrical projection is applied in reverse interpolation. To get pixel value of each point in cylindrical coordinates, calculate the corresponding planar coordinates and get its pixel value to fill the cylindrical plane. Reverse interpolation guarantees every pixel in the projected image has corresponding intensive value.

SIFT descriptors are used to match the new frame that has been projected to the cylindrical plane and the image with previous frames. If the valid match has more than four pairs of corresponding matching points, estimate parameters in homography matrix by RANSAC algorithm. Because it detects final inliers with the appropriately refined homography [11]. Transform the original images based on the homography matrix to wrap them onto the common image surface, and concatenate them accordingly to build the final panoramic result. The successive merged results are displayed in Section 4.

Focal length in the camera is adaptive during shooting, and this parameter influences the result of cylindrical projection. Besides, various light conditions in different frames as well as auto exposure settings of the camera, which is a usual case by default, also result in some discontinuities in the stitching result.

180 3.4 Blending and Cropping

181 The distortions and discontinuities in the stitching result should be alleviated
 182 by blending and cropping in the last procedure. Illuming difference leads to
 183 visible seams in the panoramic image, so various approaches to image blending
 184 have been tested in this implementation to achieve smooth transition. Linear
 185 blending has the advantage of easy implementation and fast executing, weighted
 186 average method works on pixel values in the overlapping area [12]. The result is
 187 illustrated in Fig. 2b, in comparison to the above image without blending.
 188



189 (a) Without blending
 190



191 (b) Linear blending
 192



193 (c) Laplacian blending
 194

201 **Fig. 2.** Results for blending
 202

203 As a result, the seams are less visible after linear blending. However, ghosting
 204 may appear where the same object appears twice in different positions [13].
 205 Besides, there is a remaining problem for window size choosing, which refers to
 206 the transition zone or overlap area while blending. If the window size is small,
 207 there still exists visible step at the boundary of two neighbor frames. If the
 208 window size is big on the contrary, objects in the different images might appear
 209 superimposed, and therefore leads to ghosting artifacts.
 210

211 Pyramid blending is also attempted to eliminate ghosting artifacts while alle-
 212 viating color distortion. First, the images to be stitched together are decomposed
 213 into sets of band-pass filtered component images by a series of low-pass filters,
 214 which uniformly cover the range of frequencies in original image. Gaussian pyra-
 215 mid are constructed in that way, then differences of adjacent levels are used
 216 to construct corresponding Laplacian pyramids. A third Laplacian pyramid is
 217

225 developed by composing nodes from the same layer of two pyramids together by
 226 weighted average splining method. Finally, the levels in third pyramid which are
 227 band-pass images are summed up for the final joint result. The result is shown
 228 in Fig. 2c. However, the outcome is not as ideal as that in [14]. Possible reasons
 229 include inappropriate choice of mask for composition, or incorrect handling for
 230 bound conditions.

231 Cylindrical projection is implemented before image stitching, so irregular
 232 boundaries appear in raw output. To obtain rectangular boundaries for the
 233 panoramic image, cropping and other image completion techniques should be
 234 applied [15]. Contour is derived from the original image and approximations of
 235 its rectangular shape determine the shape of final output. The result is illus-
 236 trated in Fig. 3, where the above image is the original panoramic photo without
 237 cropping, and the below one with cropping manipulation.



(a) Without cropping



(b) With cropping

Fig. 3. Result for cropping

4 Experiment Outcome

258 The stitching procedure is shown in Fig. 4. The first image is the first frame
 259 captured by the camera. The next two images are intermediate results in image
 260 registration and stitching procedure. The fourth image is the final panoramic
 261 photo with all key frames joint together and after further optimization including
 262 histogram equalization for uneven exposure, blending for color distortion and
 263 cropping for irregular boundaries. The transition is rather smooth and artifacts
 264 like blurring and ghosting have been alleviated.

5 Conclusions

266 Automatic panorama generation is proposed in this article, including key frame
 267 selection, feature detection, image registration, image wrapping, blending and



(a) First frame



(b) Image of stitching the first 3 frames



(c) Image of stitching the first 5 frames



(d) Panoramic photo

Fig. 4. Successive concatenate results

cropping. The step-by-step results have been explained in previous sections. As a

term project, team members grasp deeper understanding of image manipulation and practical techniques for this task.

There still exists potential work for further optimization to deal with the distortions and expansion of panoramic photography applications. PCA-SIFT can be implemented as an extension of SIFT with more distinctive local descriptors, and hence is more invariant to image deformations with higher accuracy [16]. The algorithm is similar with SIFT, where the salient aspects of the image gradient in the potential key points are encoded as descriptors. The extended part is that the normalization of gradient patch utilizes Principal Components Analysis (PCA). Experiment results illustrate the optimization in accuracy and matching speed.

Exposures are not even because the images are taken outdoor and the light conditions are changing constantly among these frames. In the implementation of this project, histogram equalization is used to handle the problem, but it is not entirely solved—the uneven exposure is still visible and influences blending results. One possible approach is Generalized Mosaicking, in which an optical filter with spatially varying properties is attached to camera [17]. The filter receives information in various lighting conditions, and the information builds new model to describe the conditions and achieves high dynamic range (HDR) mosaic. Integration of HDR radiance map and feathering technique guarantee that the procedure of generating panoramic photography will be invariant to uneven exposure to some extent [18].

Applications for panoramic photography can be extended to various areas. Motion analysis tasks like surveillance and smoke detection are time-consuming while employing complex equipments. Panoramic photography makes it possible to build omnidirectional monitoring system with small and compact devices to achieve optimal solutions [19]. Algorithm of generating panoramic photography could be utilized for dental panoramic X-ray to obtain tomographic image via wide X-ray beams [20].

6 Learning Outcome

During the implementation procedure, we got familiar with the basic workflow of panoramic photo generation, including key frame selection, feature detection and matching, cylindrical projection, homography computation and image stitching. We also implemented related optimization techniques, such as blending for color distortion and cropping to correlate the final result. We reviewed literature on panoramic photography development and learned different approaches to achieve panorama generation. These methods utilize features of different levels, from pixel value, frequency domain, low-level features like edges to high-level features. Thereby, we were able to practice image manipulations on distinct levels and various perspectives. Further discussion and potential work inspired us to learn the cutting-edge techniques to solve the problem and extensive application scenarios for panoramic photo generation.

References

1. Luhmann, T.: A historical review on panorama photogrammetry. International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences **34**(5/W16) (2004) 8
2. Deng, Y., Zhang, T.: Generating panorama photos. In: Internet Multimedia Management Systems IV. Volume 5242., International Society for Optics and Photonics (2003) 270–279
3. Nayar, S.K.: Catadioptric omnidirectional camera. In: Proceedings of IEEE computer society conference on computer vision and pattern recognition, IEEE (1997) 482–488
4. Barnea, D.I., Silverman, H.F.: A class of algorithms for fast digital image registration. IEEE transactions on Computers **100**(2) (1972) 179–186
5. De Castro, E., Morandi, C.: Registration of translated and rotated images using finite fourier transforms. IEEE Transactions on pattern analysis and machine intelligence (5) (1987) 700–703
6. Goshtasby, A.: Image registration by local approximation methods. Image and Vision Computing **6**(4) (1988) 255–261
7. Szeliski, R., Shum, H.Y.: Creating full view panoramic image mosaics and environment maps. In: Proceedings of the 24th annual conference on Computer graphics and interactive techniques, ACM Press/Addison-Wesley Publishing Co. (1997) 251–258
8. OpenCV: Open source computer vision. <https://docs.opencv.org/3.4.0/>, note=[Online; accessed 30-May-2018] (December 22 2017)
9. Fadaeieslam, M.J., Fathy, M., Soryani, M.: Key frames selection into panoramic mosaics. In: 2009 7th International Conference on Information, Communications and Signal Processing (ICICS), IEEE (2009) 1–5
10. Lowe, D.G.: Distinctive image features from scale-invariant keypoints. International journal of computer vision **60**(2) (2004) 91–110
11. Wu, F., Fang, X.: An improved ransac homography algorithm for feature based image mosaic. In: Proceedings of the 7th WSEAS International Conference on Signal Processing, Computational Geometry & Artificial Vision, World Scientific and Engineering Academy and Society (WSEAS) (2007) 202–207
12. Li, Y., Wang, Y., Huang, W., Zhang, Z.: Automatic image stitching using sift. In: 2008 International Conference on Audio, Language and Image Processing, IEEE (2008) 568–571
13. Juan, L., Oubong, G.: Surf applied in panorama image stitching. In: 2010 2nd international conference on image processing theory, tools and applications, IEEE (2010) 495–499
14. Burt, P.J., Adelson, E.H.: A multiresolution spline with application to image mosaics. ACM transactions on Graphics **2**(4) (1983) 217–236
15. He, K., Chang, H., Sun, J.: Rectangling panoramic images via warping. ACM Transactions on Graphics (TOG) **32**(4) (2013) 79
16. Ke, Y., Sukthankar, R., et al.: Pca-sift: A more distinctive representation for local image descriptors. CVPR (2) 4 (2004) 506–513
17. Schechner, Y.Y., Nayar, S.K.: Generalized mosaicing: High dynamic range in a wide field of view. International Journal of Computer Vision **53**(3) (2003) 245–267
18. Jain, P.M., Shandliya, V.: A review paper on various approaches for image mosaicing. International Journal of Computational Engineering Research **3**(4) (2013) 106–109

- 405 19. Kopilovic, I., Vagvolgyi, B., Szirányi, T.: Application of panoramic annular lens
406 for motion analysis tasks: surveillance and smoke detection. In: Proceedings 15th
407 International Conference on Pattern Recognition. ICPR-2000. Volume 4., IEEE
408 (2000) 714–717
- 409 20. Arai, Y.: Dental panoramic x-ray imaging apparatus (July 21 1998) US Patent
410 5,784,429.

405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449