



15 1503 08

Jack connectors

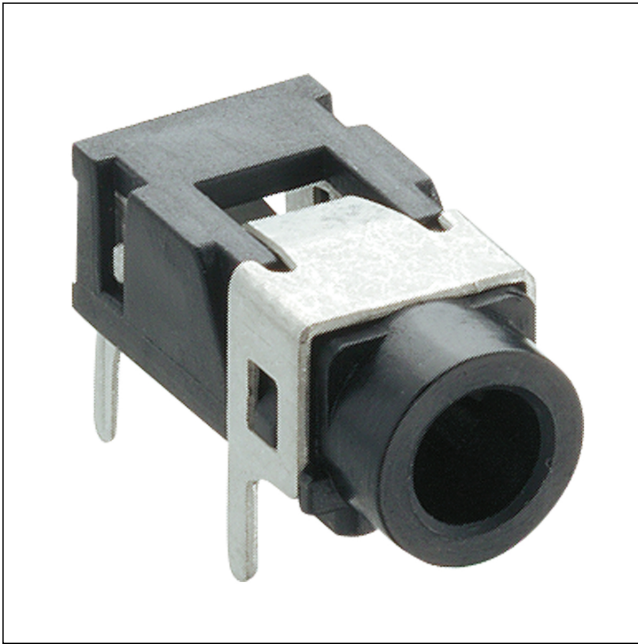

Jack chassis socket acc. to JIS C 6560 JC35J3A, 3.5 mm, 3 poles/stereo, angular version, for printed circuit boards

State: Obsolete



*a printed circuit board layout, solder side view

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body	PBT GF, V-0 according to UL94
Contact spring	Cu alloy, tin-plated

Mechanical data

Mating cycles	≥ 5000
Insertion force	5–20 N
Withdrawal force	4–20 N

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 50 mΩ
Rated current	1 A
Rated voltage	34 V AC/DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts

1532 07	KLS 40	KLS 44
WKLS 40		

15

1503 08

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1503 08	3	500	1000

Packaging:

in bulk, in a cardboard box or a plastic bag