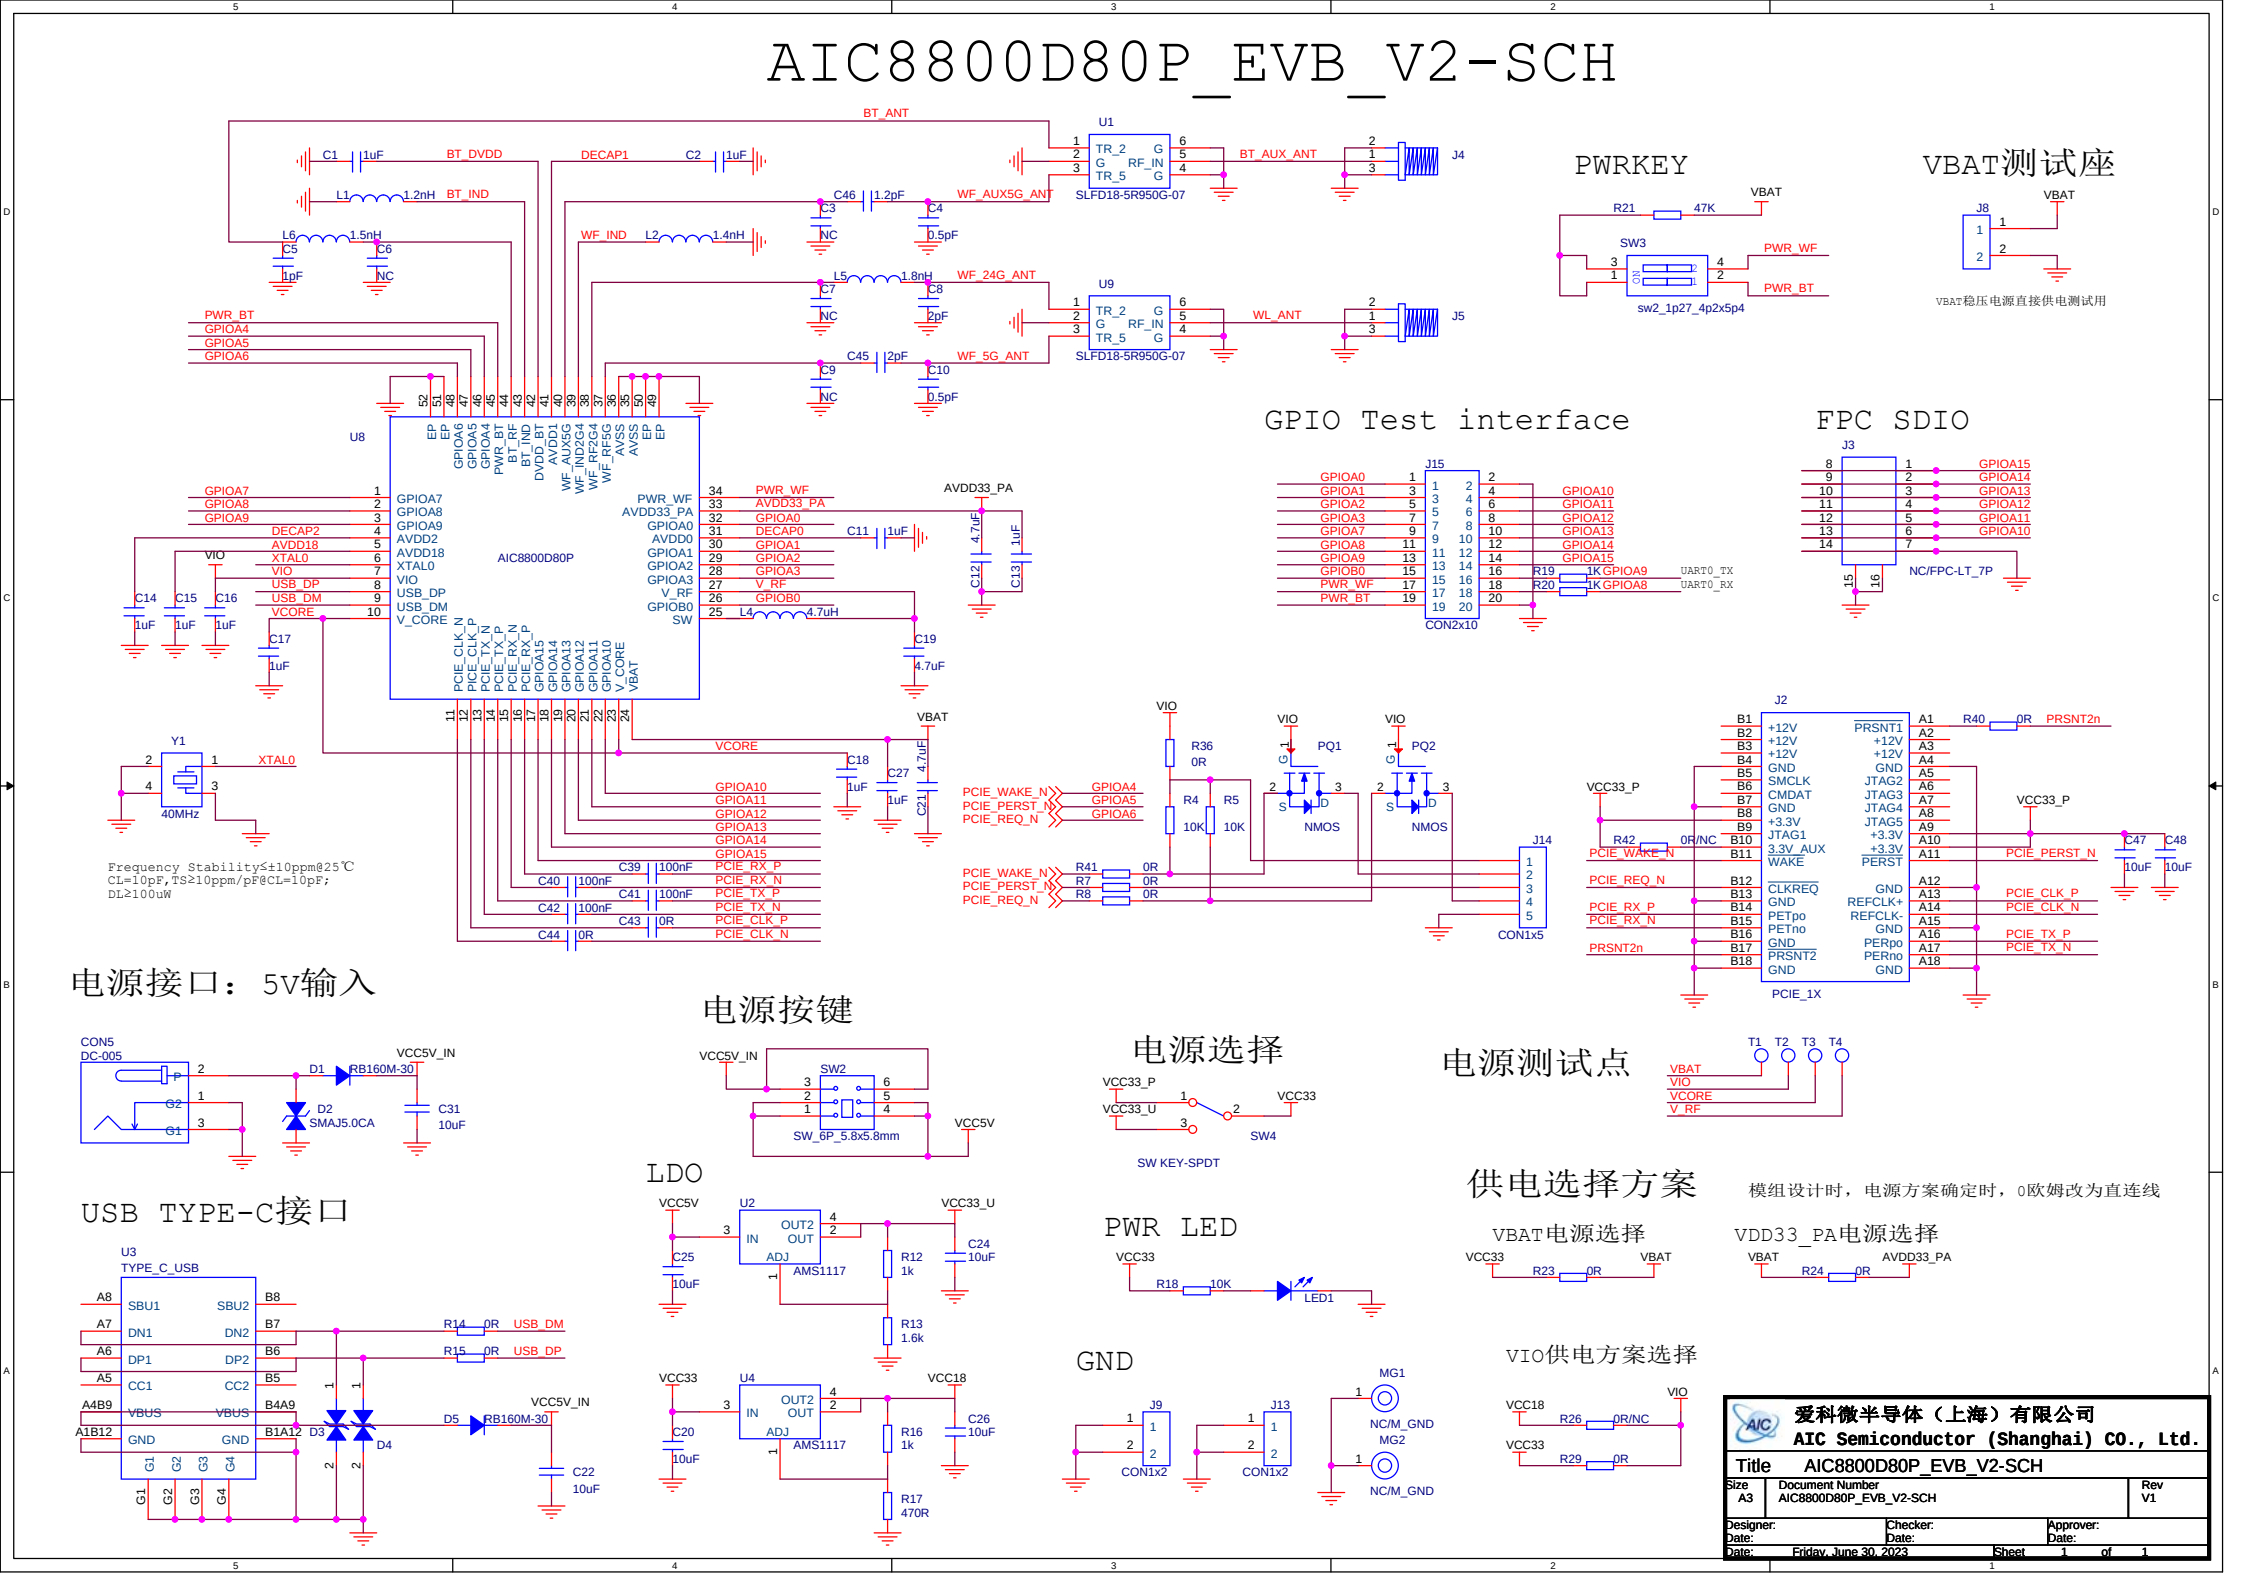
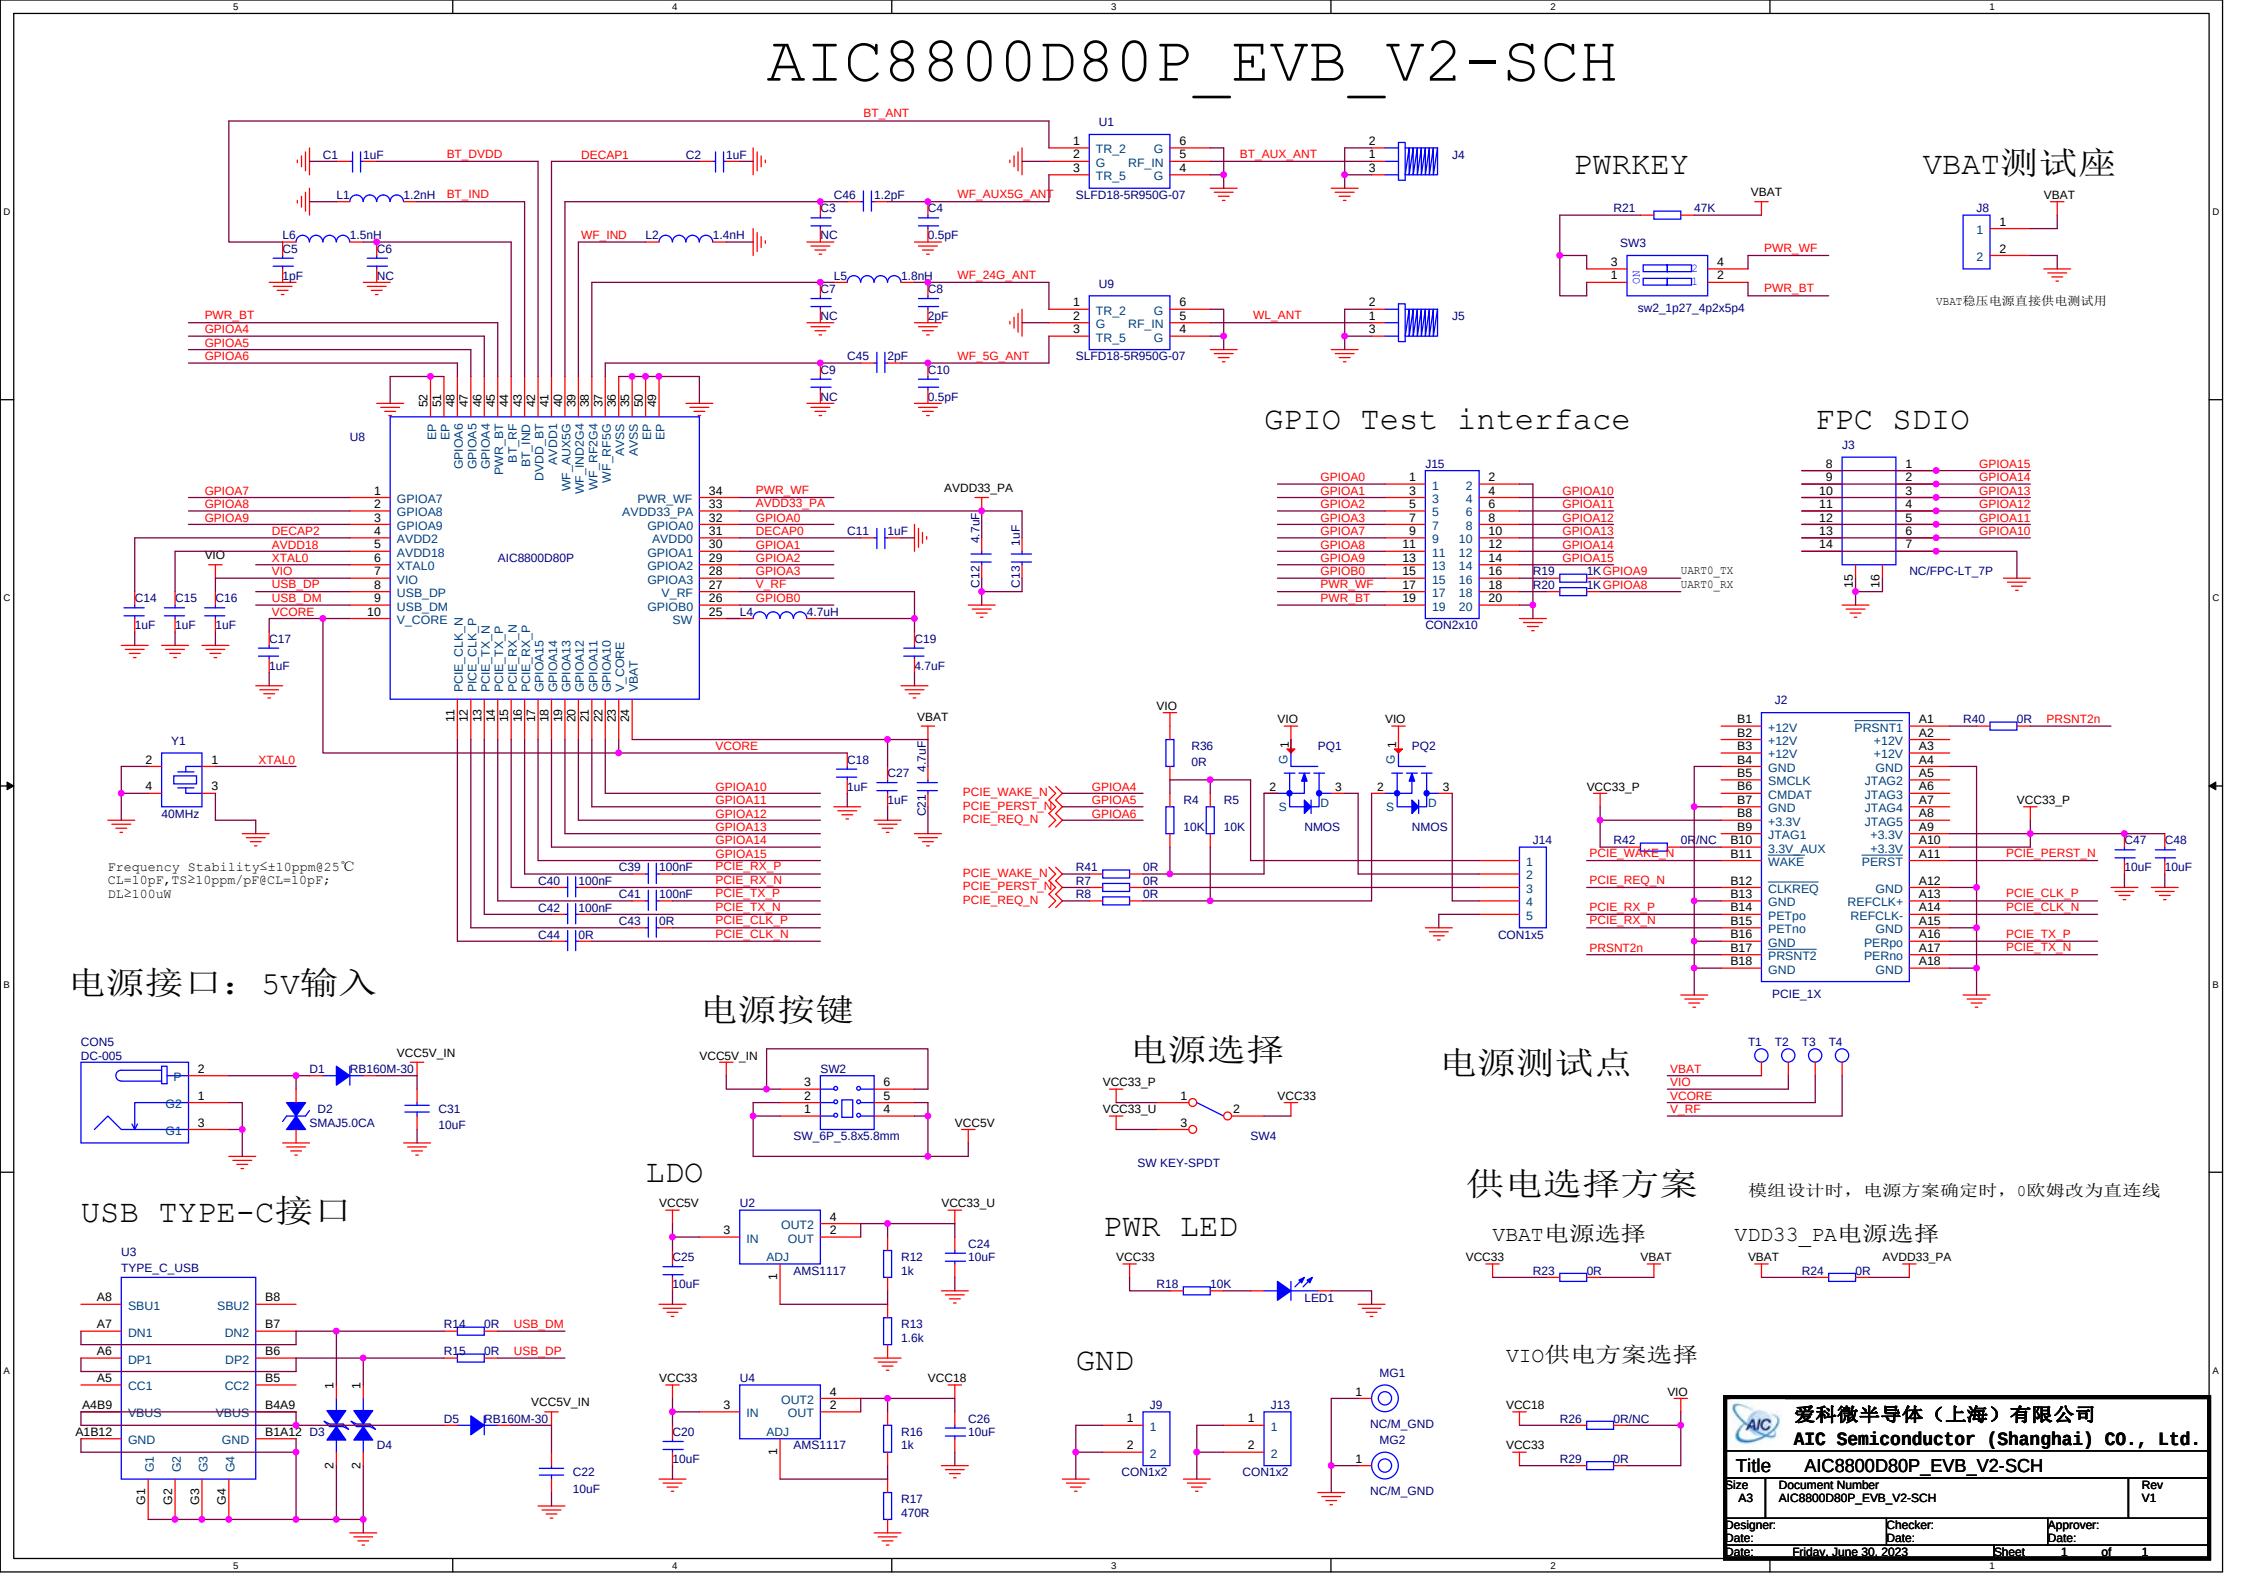
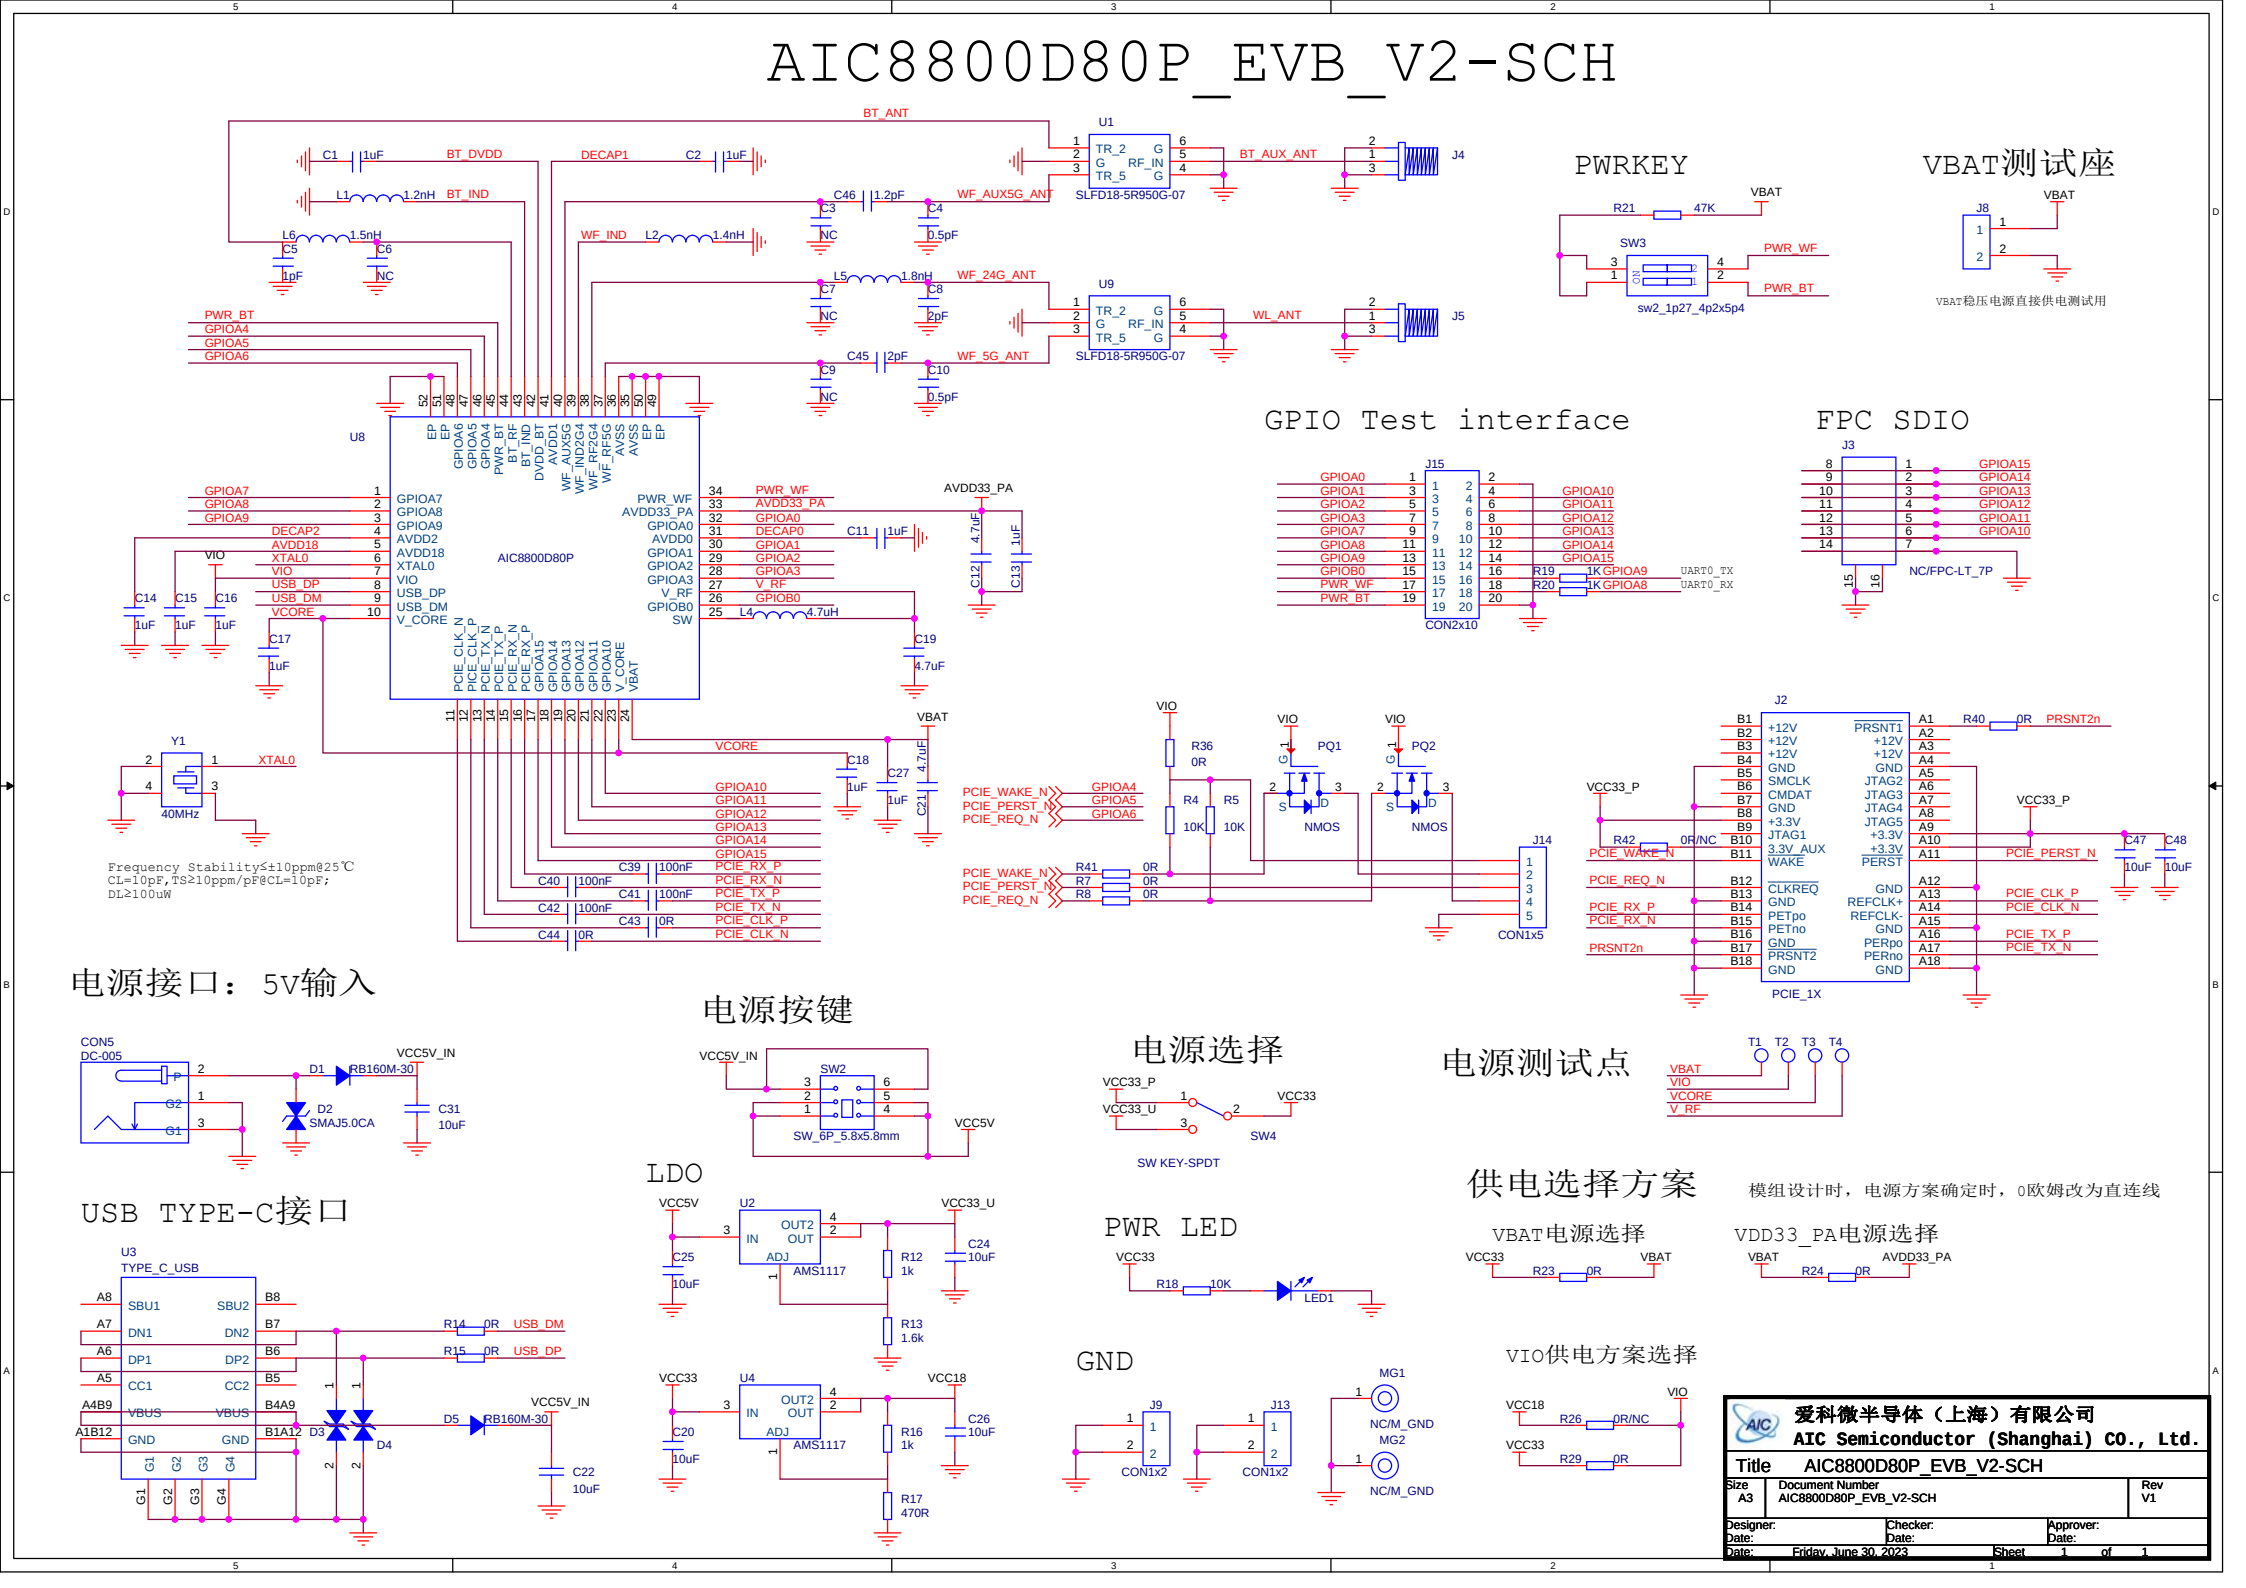
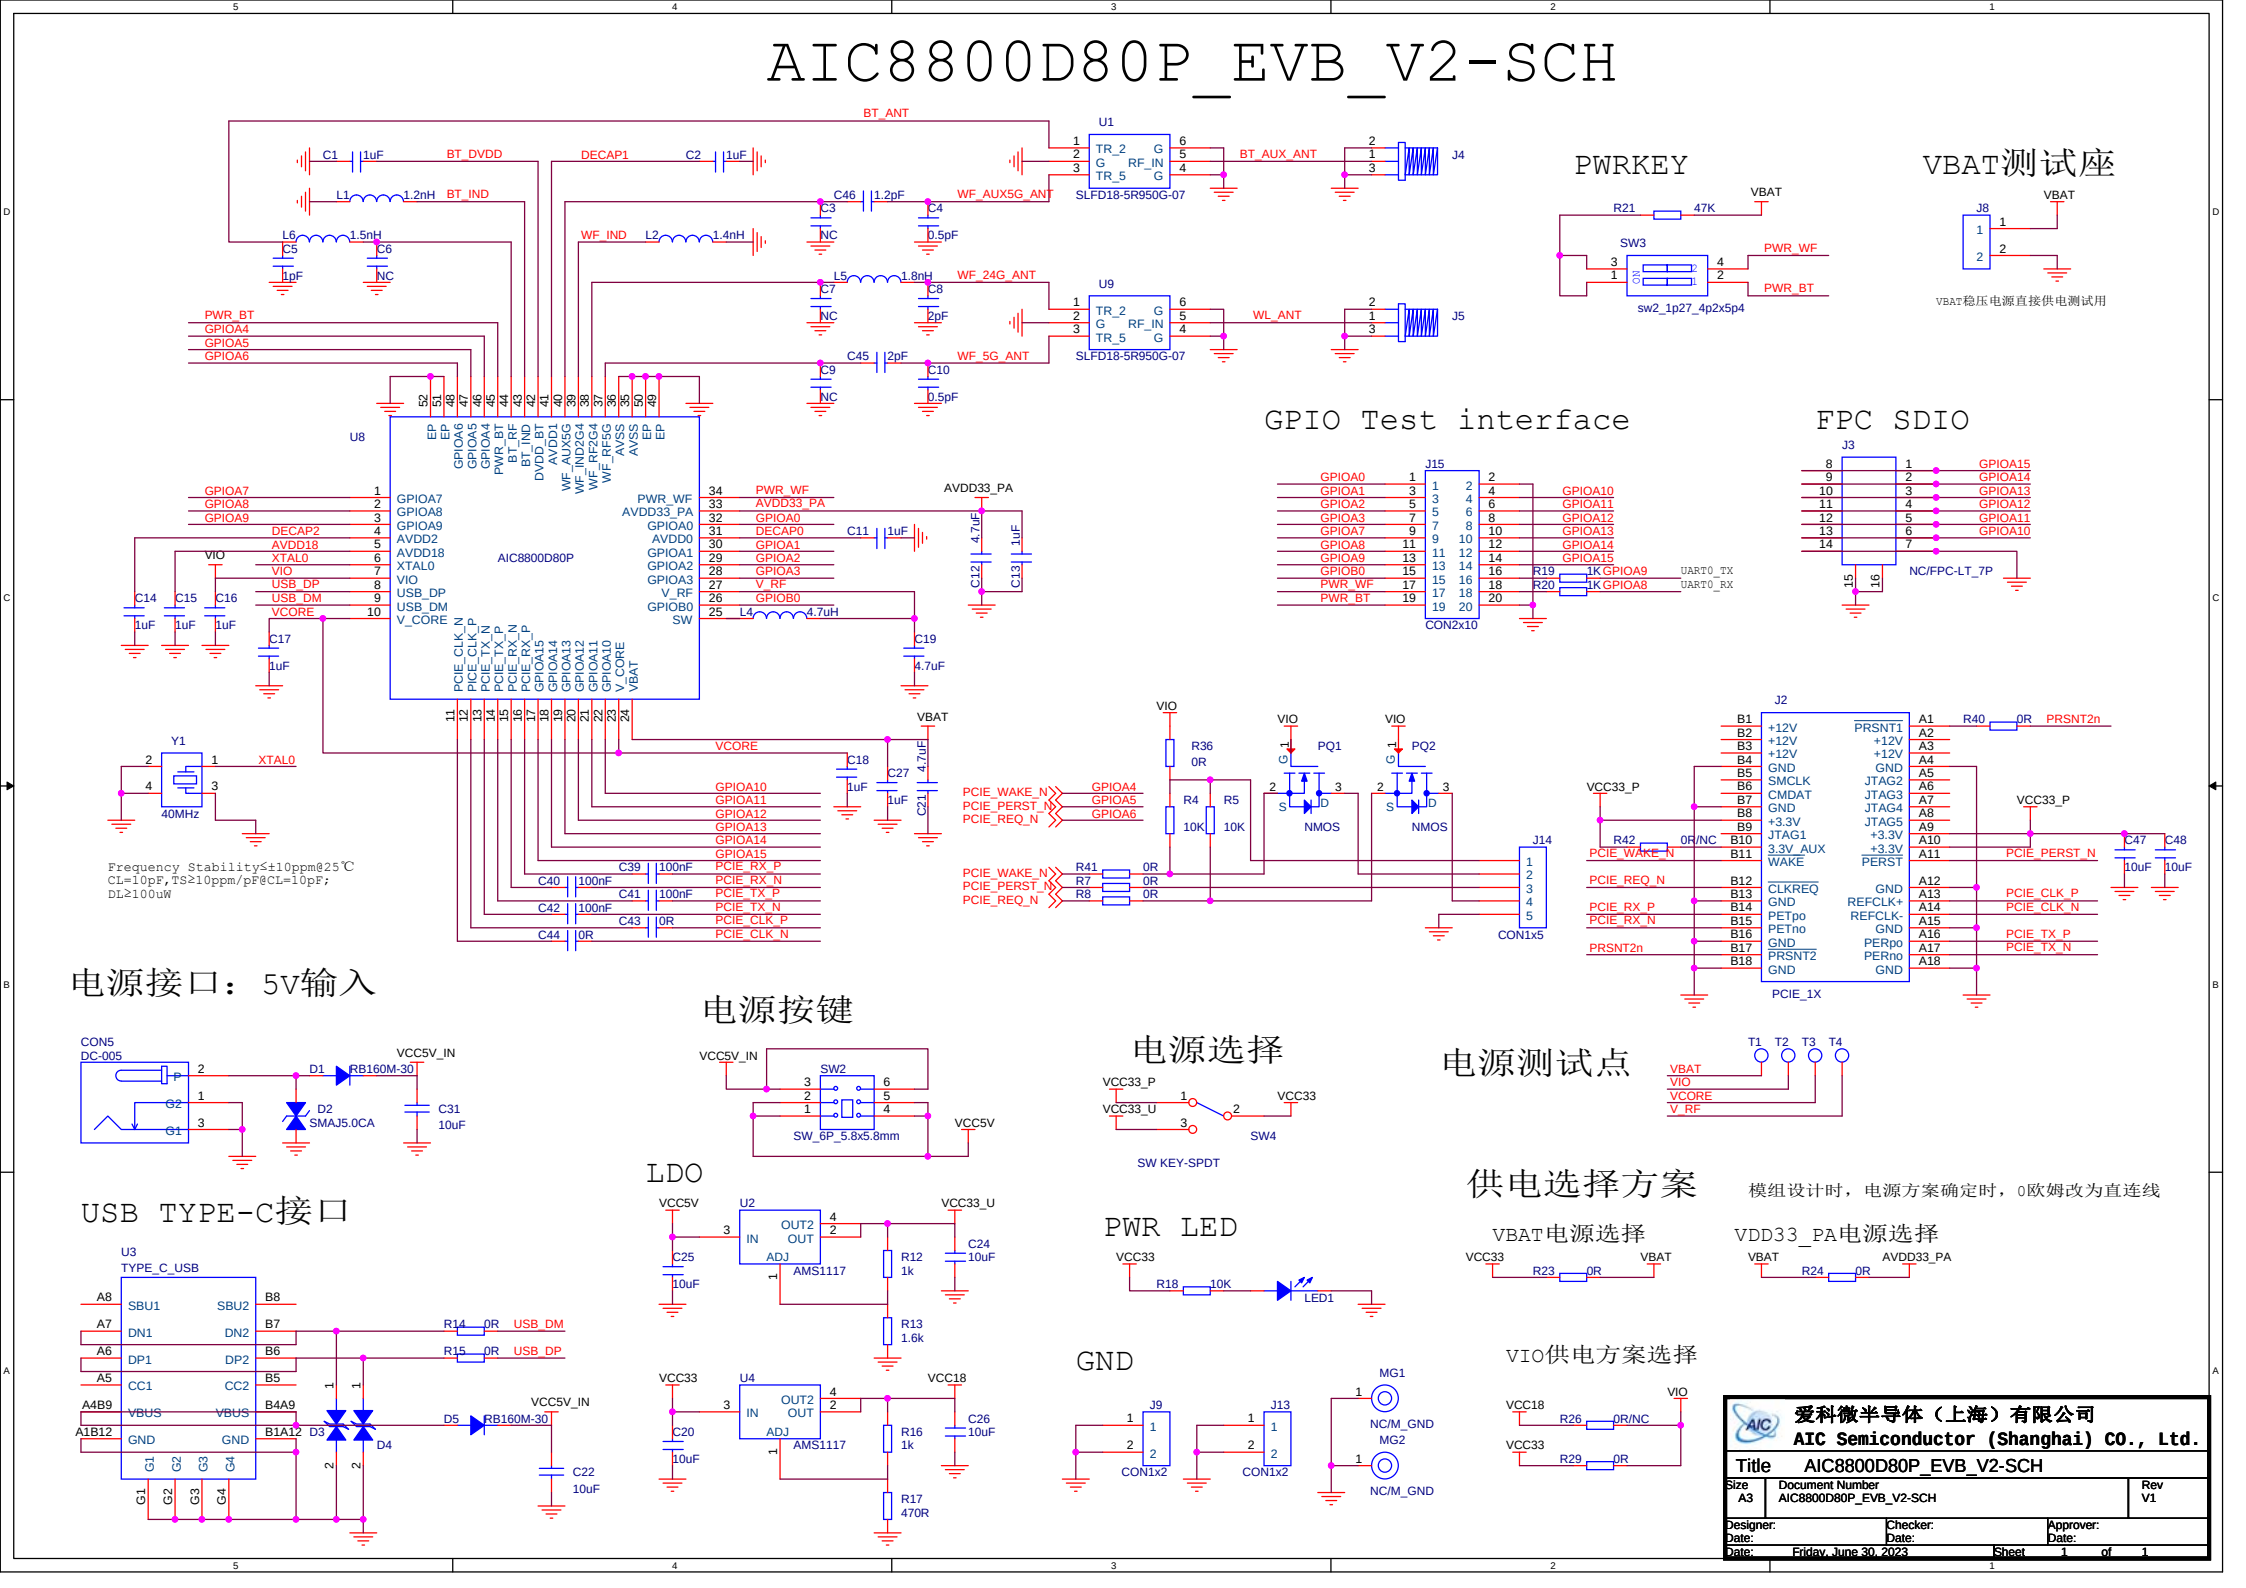
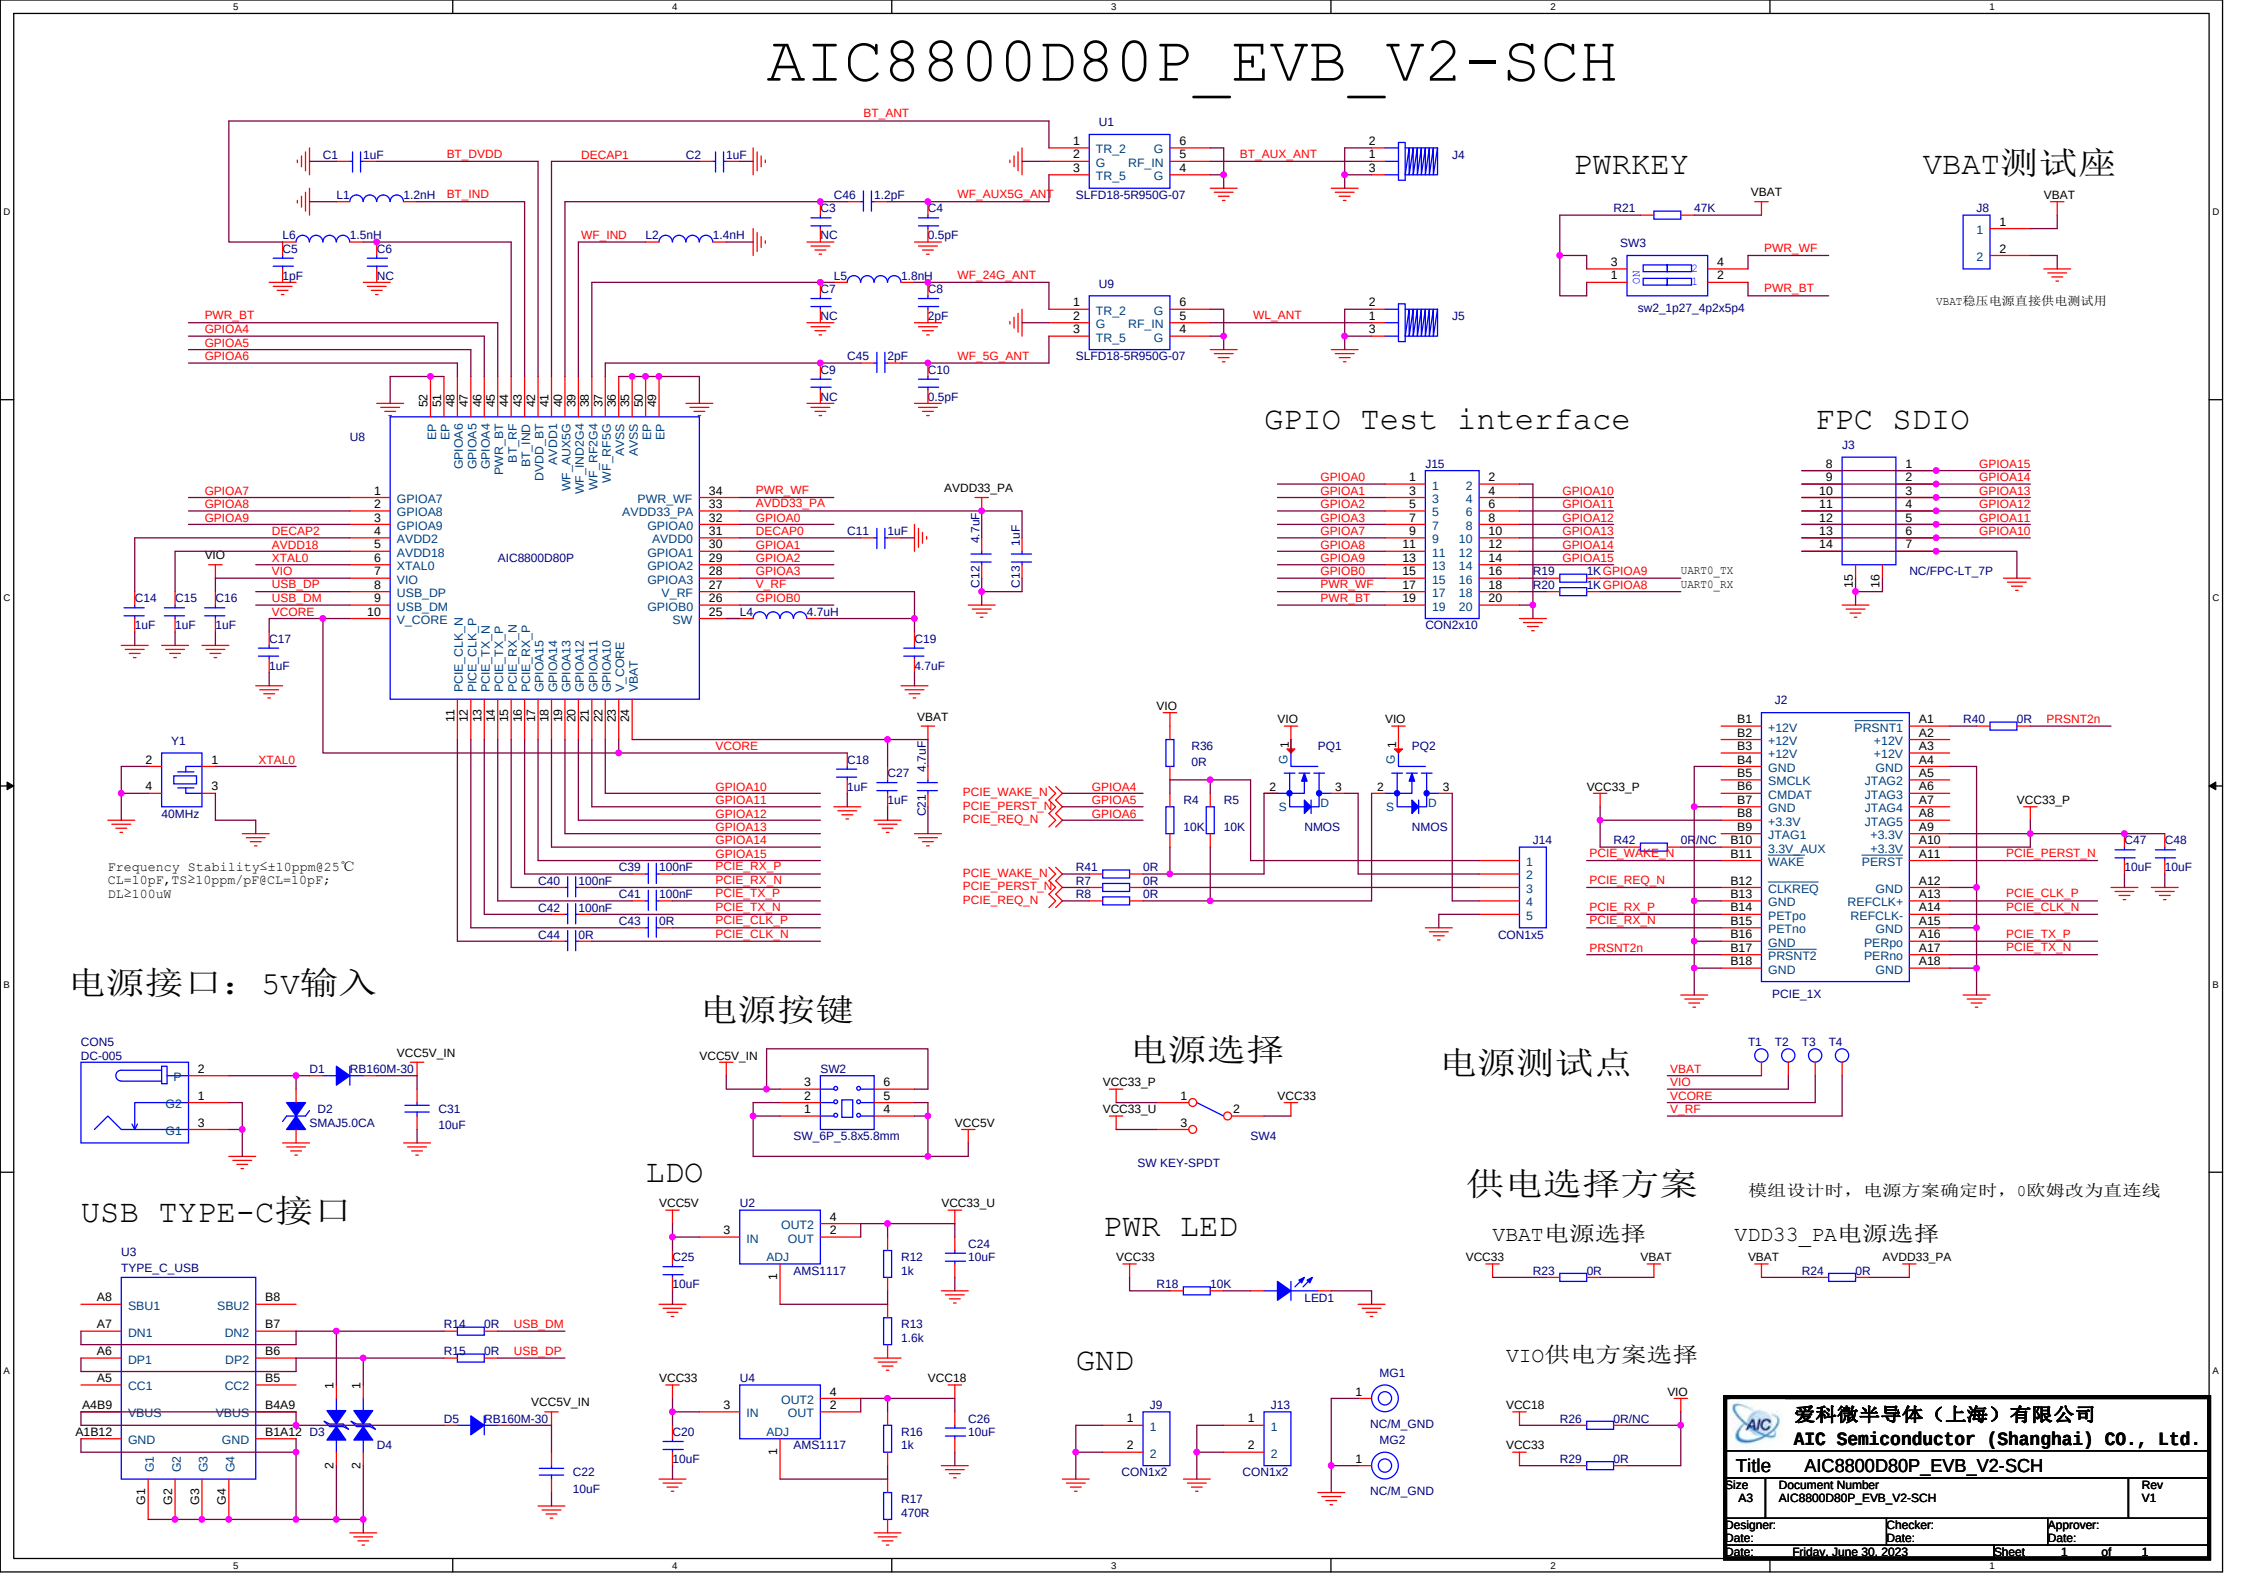


[illegible][illegible]

AIC8800D80P_EVB_V2-SCH

Frequency Stability $\leq \pm 10\text{ppm}@25^\circ\text{C}$
CL=10pF, TS $\geq 10\text{ppm/pF}$ at CL=10pF;
DL $\geq 100\text{uW}$

电源接口：5V输入

电源按键

电源选择

电源测试点

供电选择方案

USB TYPE-C接口

LDO

PWR LED

GND

VIO供电方案选择

模组设计时，电源方案确定时，0欧姆改为直连线

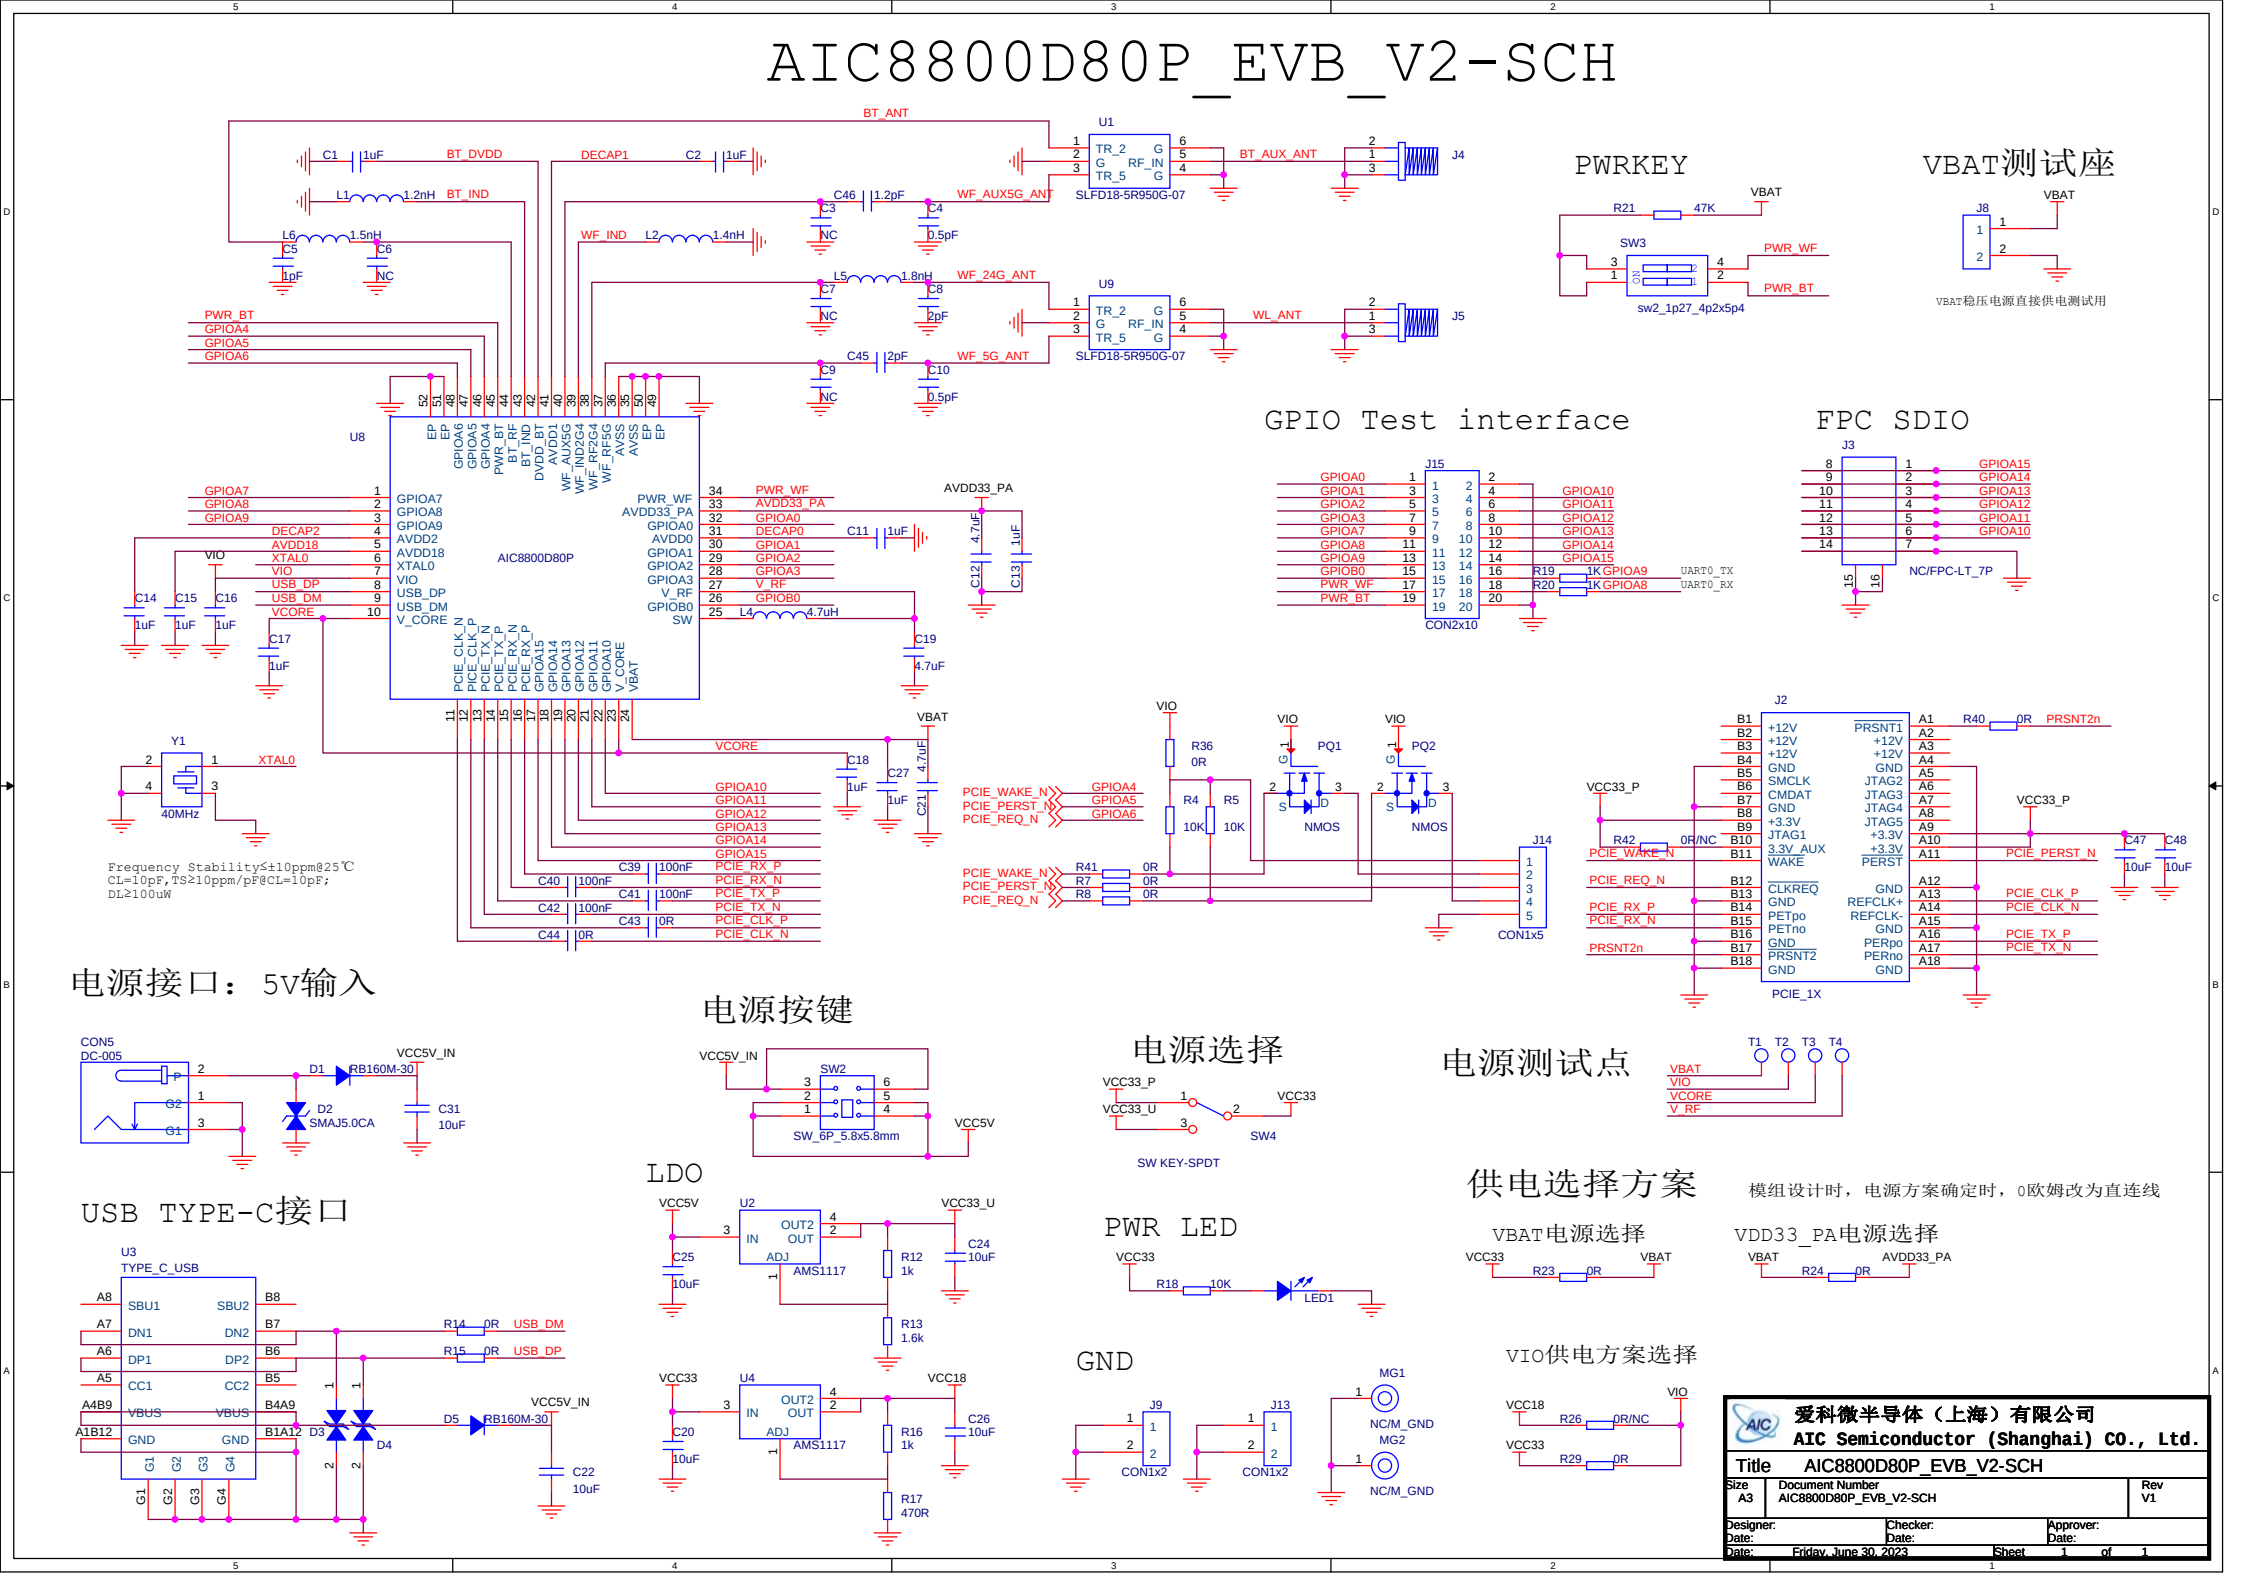
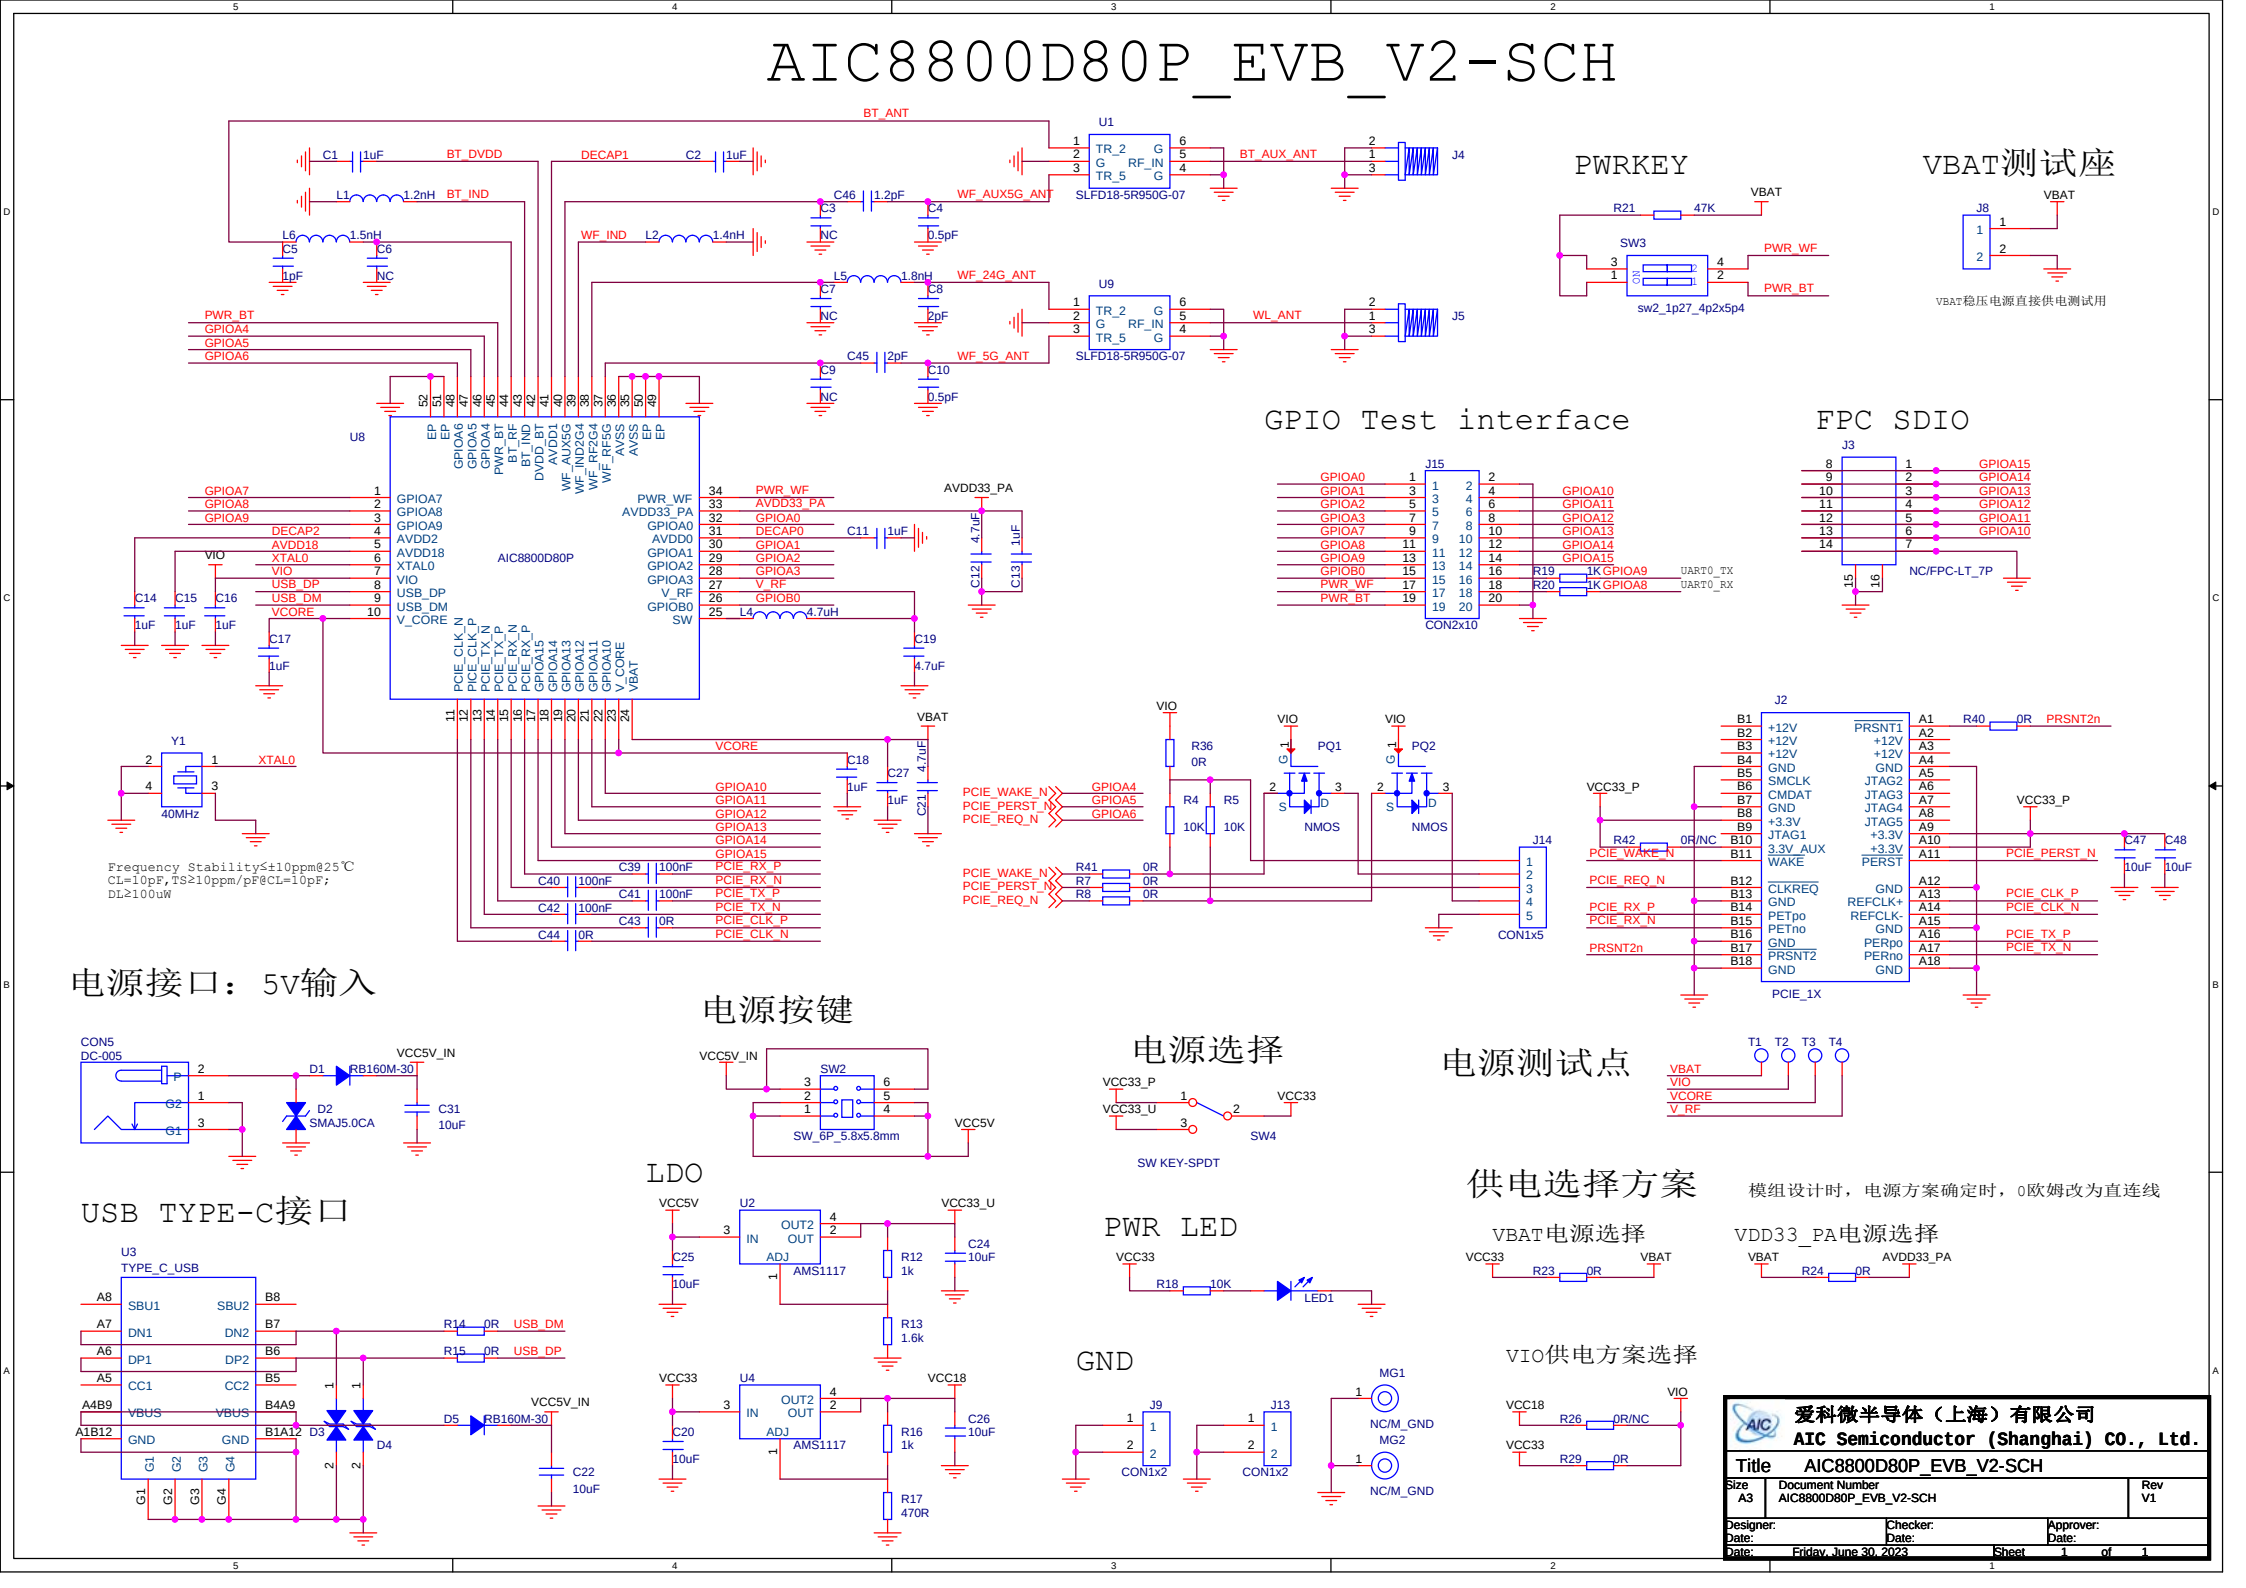
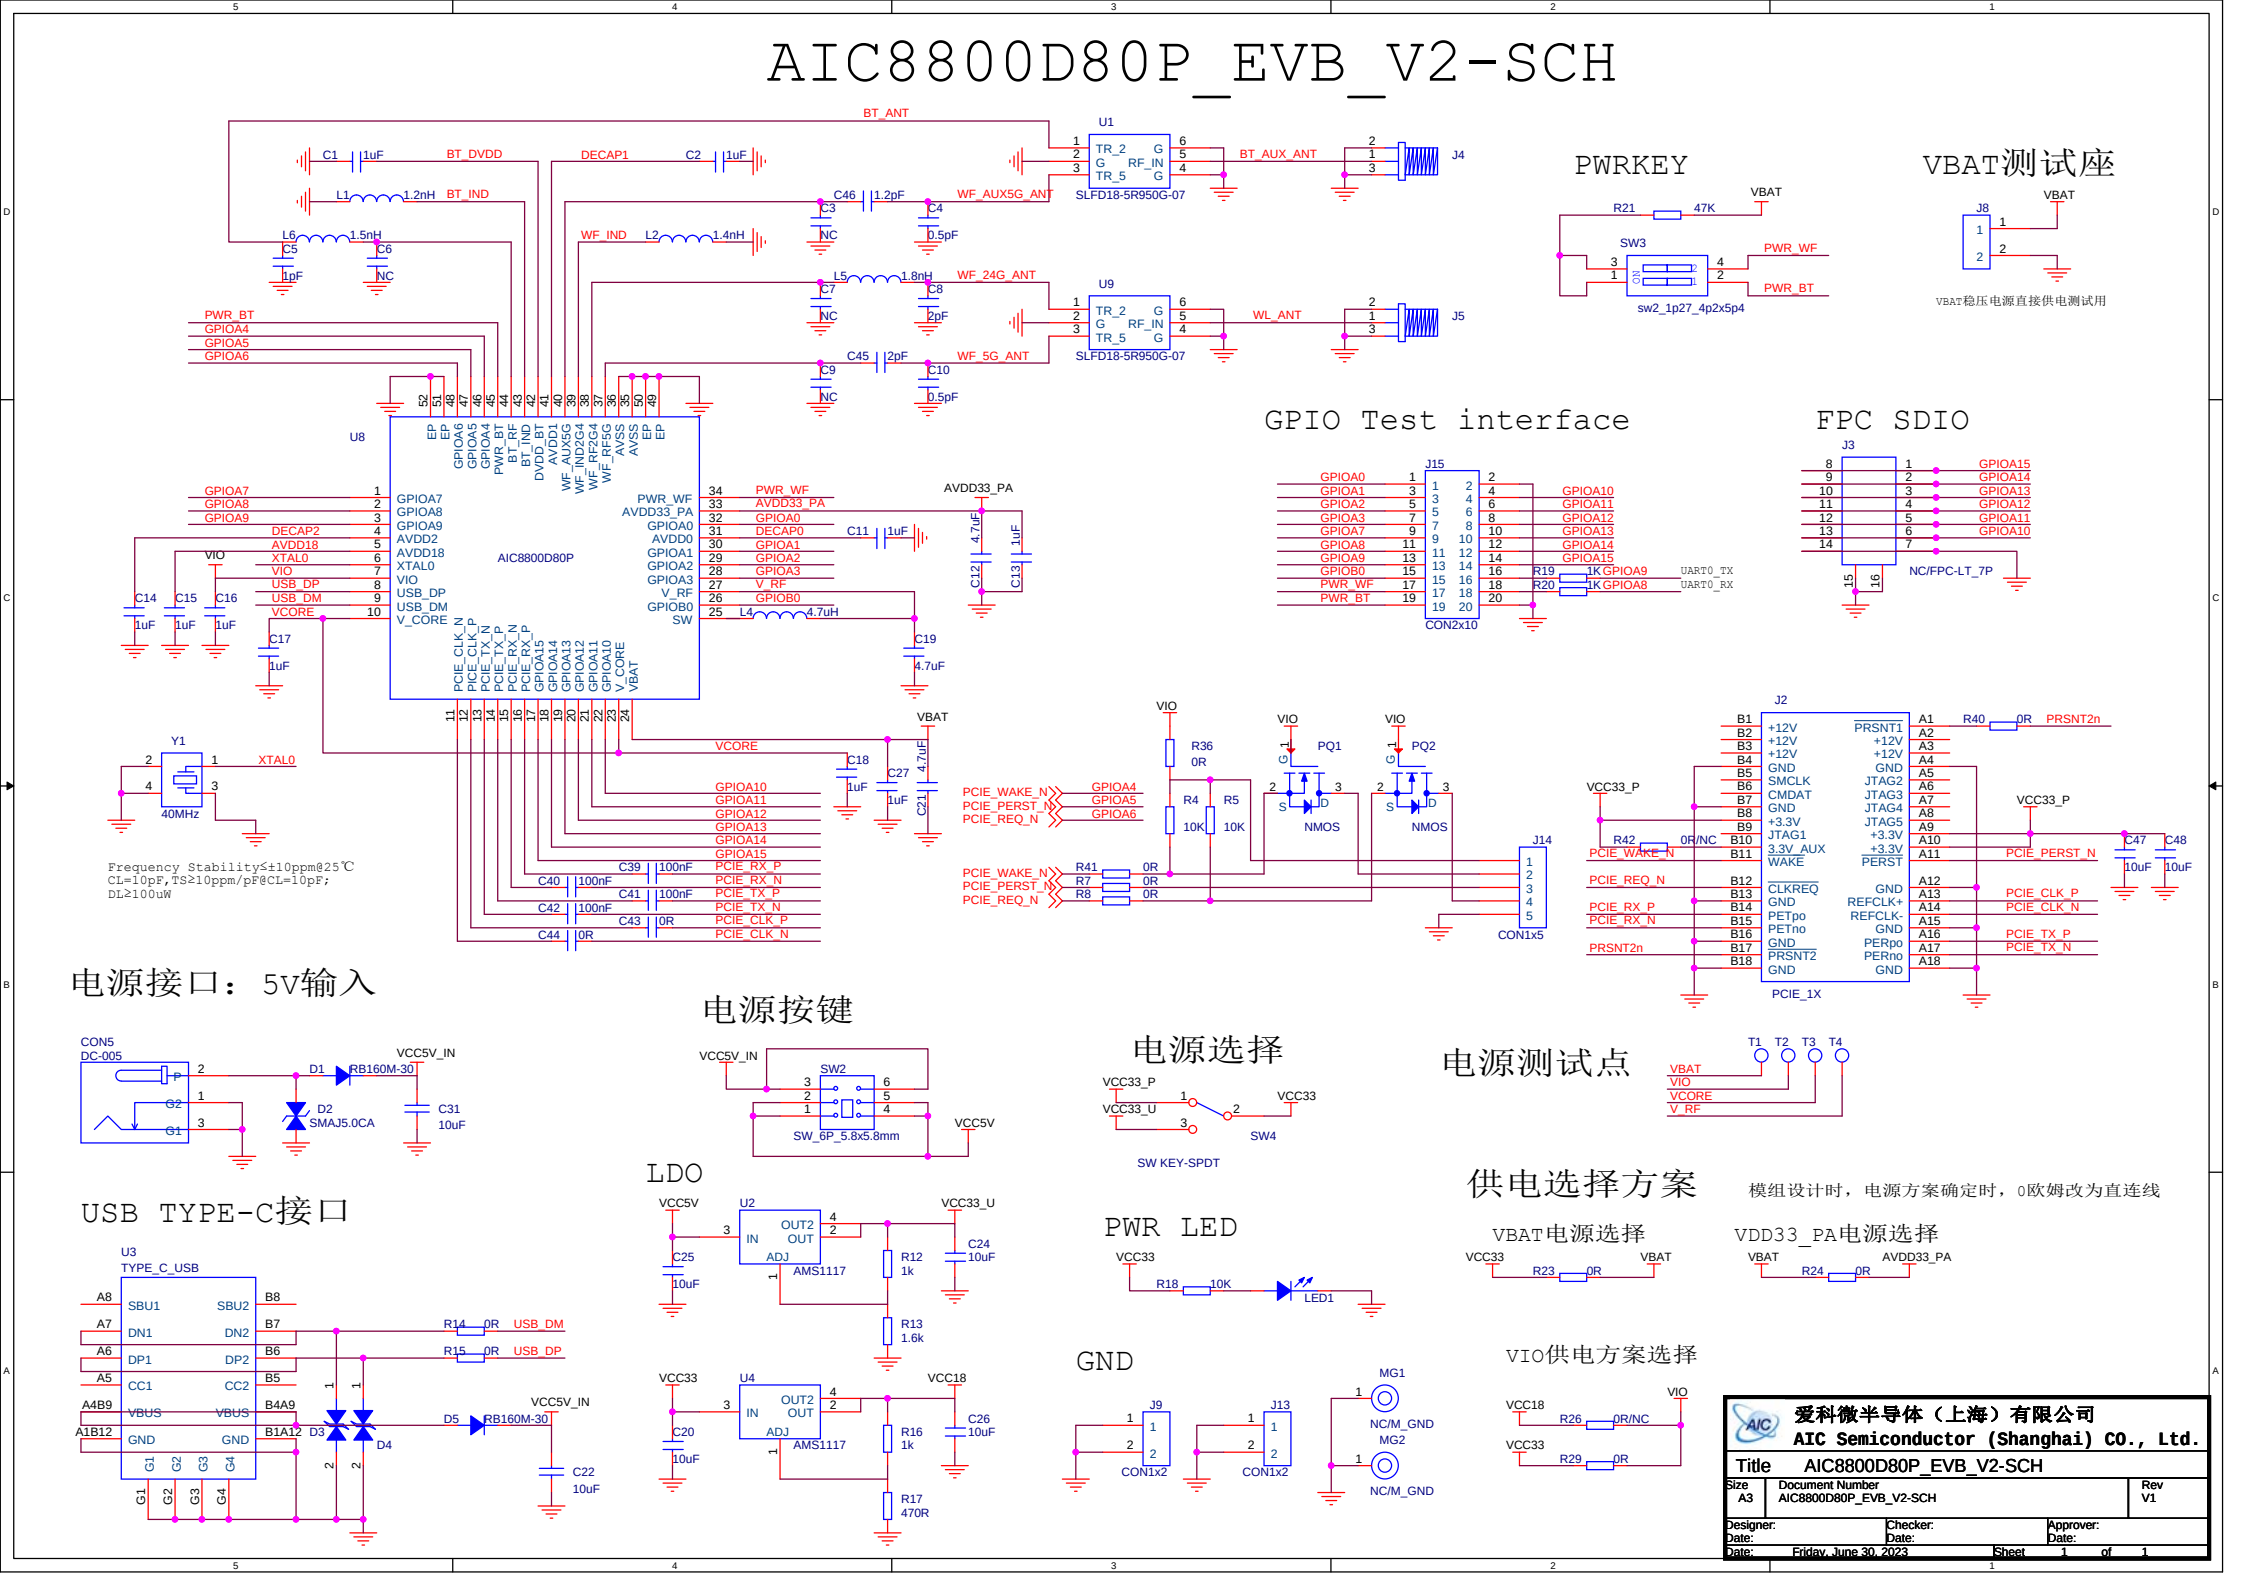
爱科微半导体（上海）有限公司
AIC Semiconductor (Shanghai) CO., Ltd.

Title AIC8800D80P_EVB_V2-SCH

Size A3 Document Number AIC8800D80P_EVB_V2-SCH Rev V1

Designer: Date: Checker: Date: Approver: Date:

Date: Friday, June 30, 2023 Sheet 1 of 1



AIC8800D80P_EVB_V2-SCH

Frequency Stability $\leq \pm 10\text{ppm}@25^\circ\text{C}$
CL=10pF, TS $\geq 10\text{ppm/pF}$ at CL=10pF;
DL $\geq 100\text{uW}$

电源接口：5V输入

电源按键

LDO

USB TYPE-C接口

PWR LED

GND

VIO供电方案选择

GPIO Test interface

FPC SDIO

BT ANT

PWRKEY

VBAT测试座

VBAT稳压电源直接供电测试用

模组设计时，电源方案确定时，0欧姆改为直连线

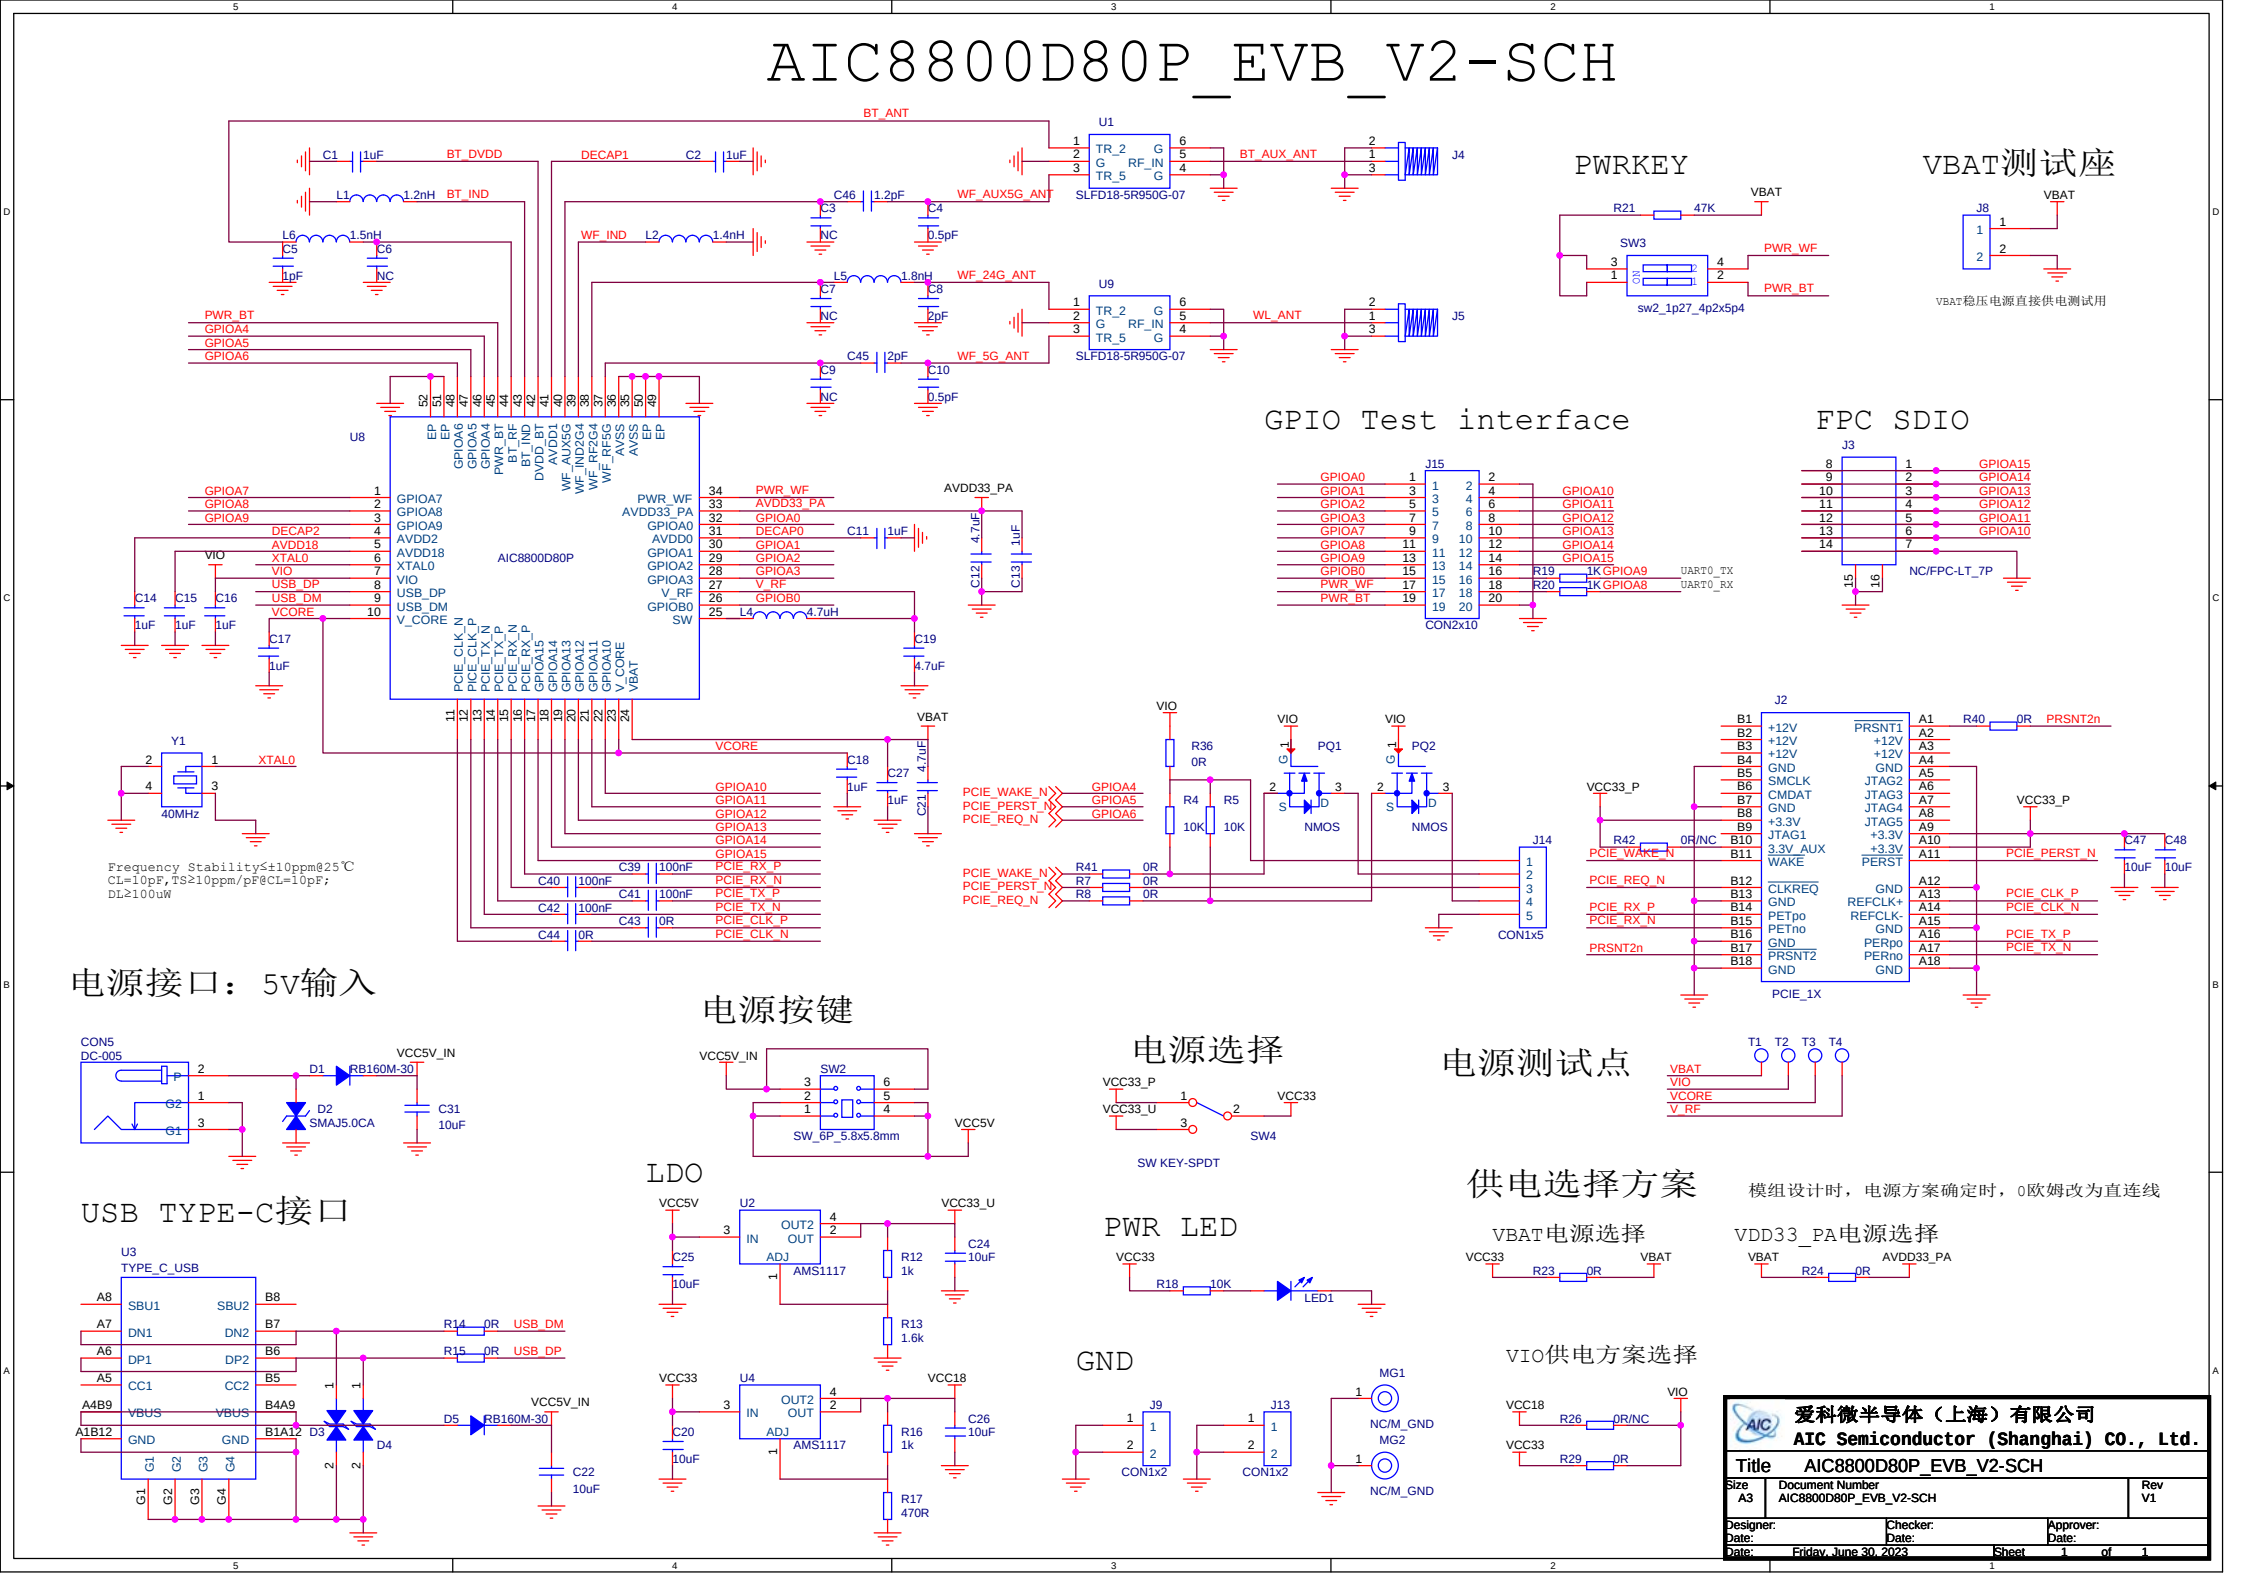
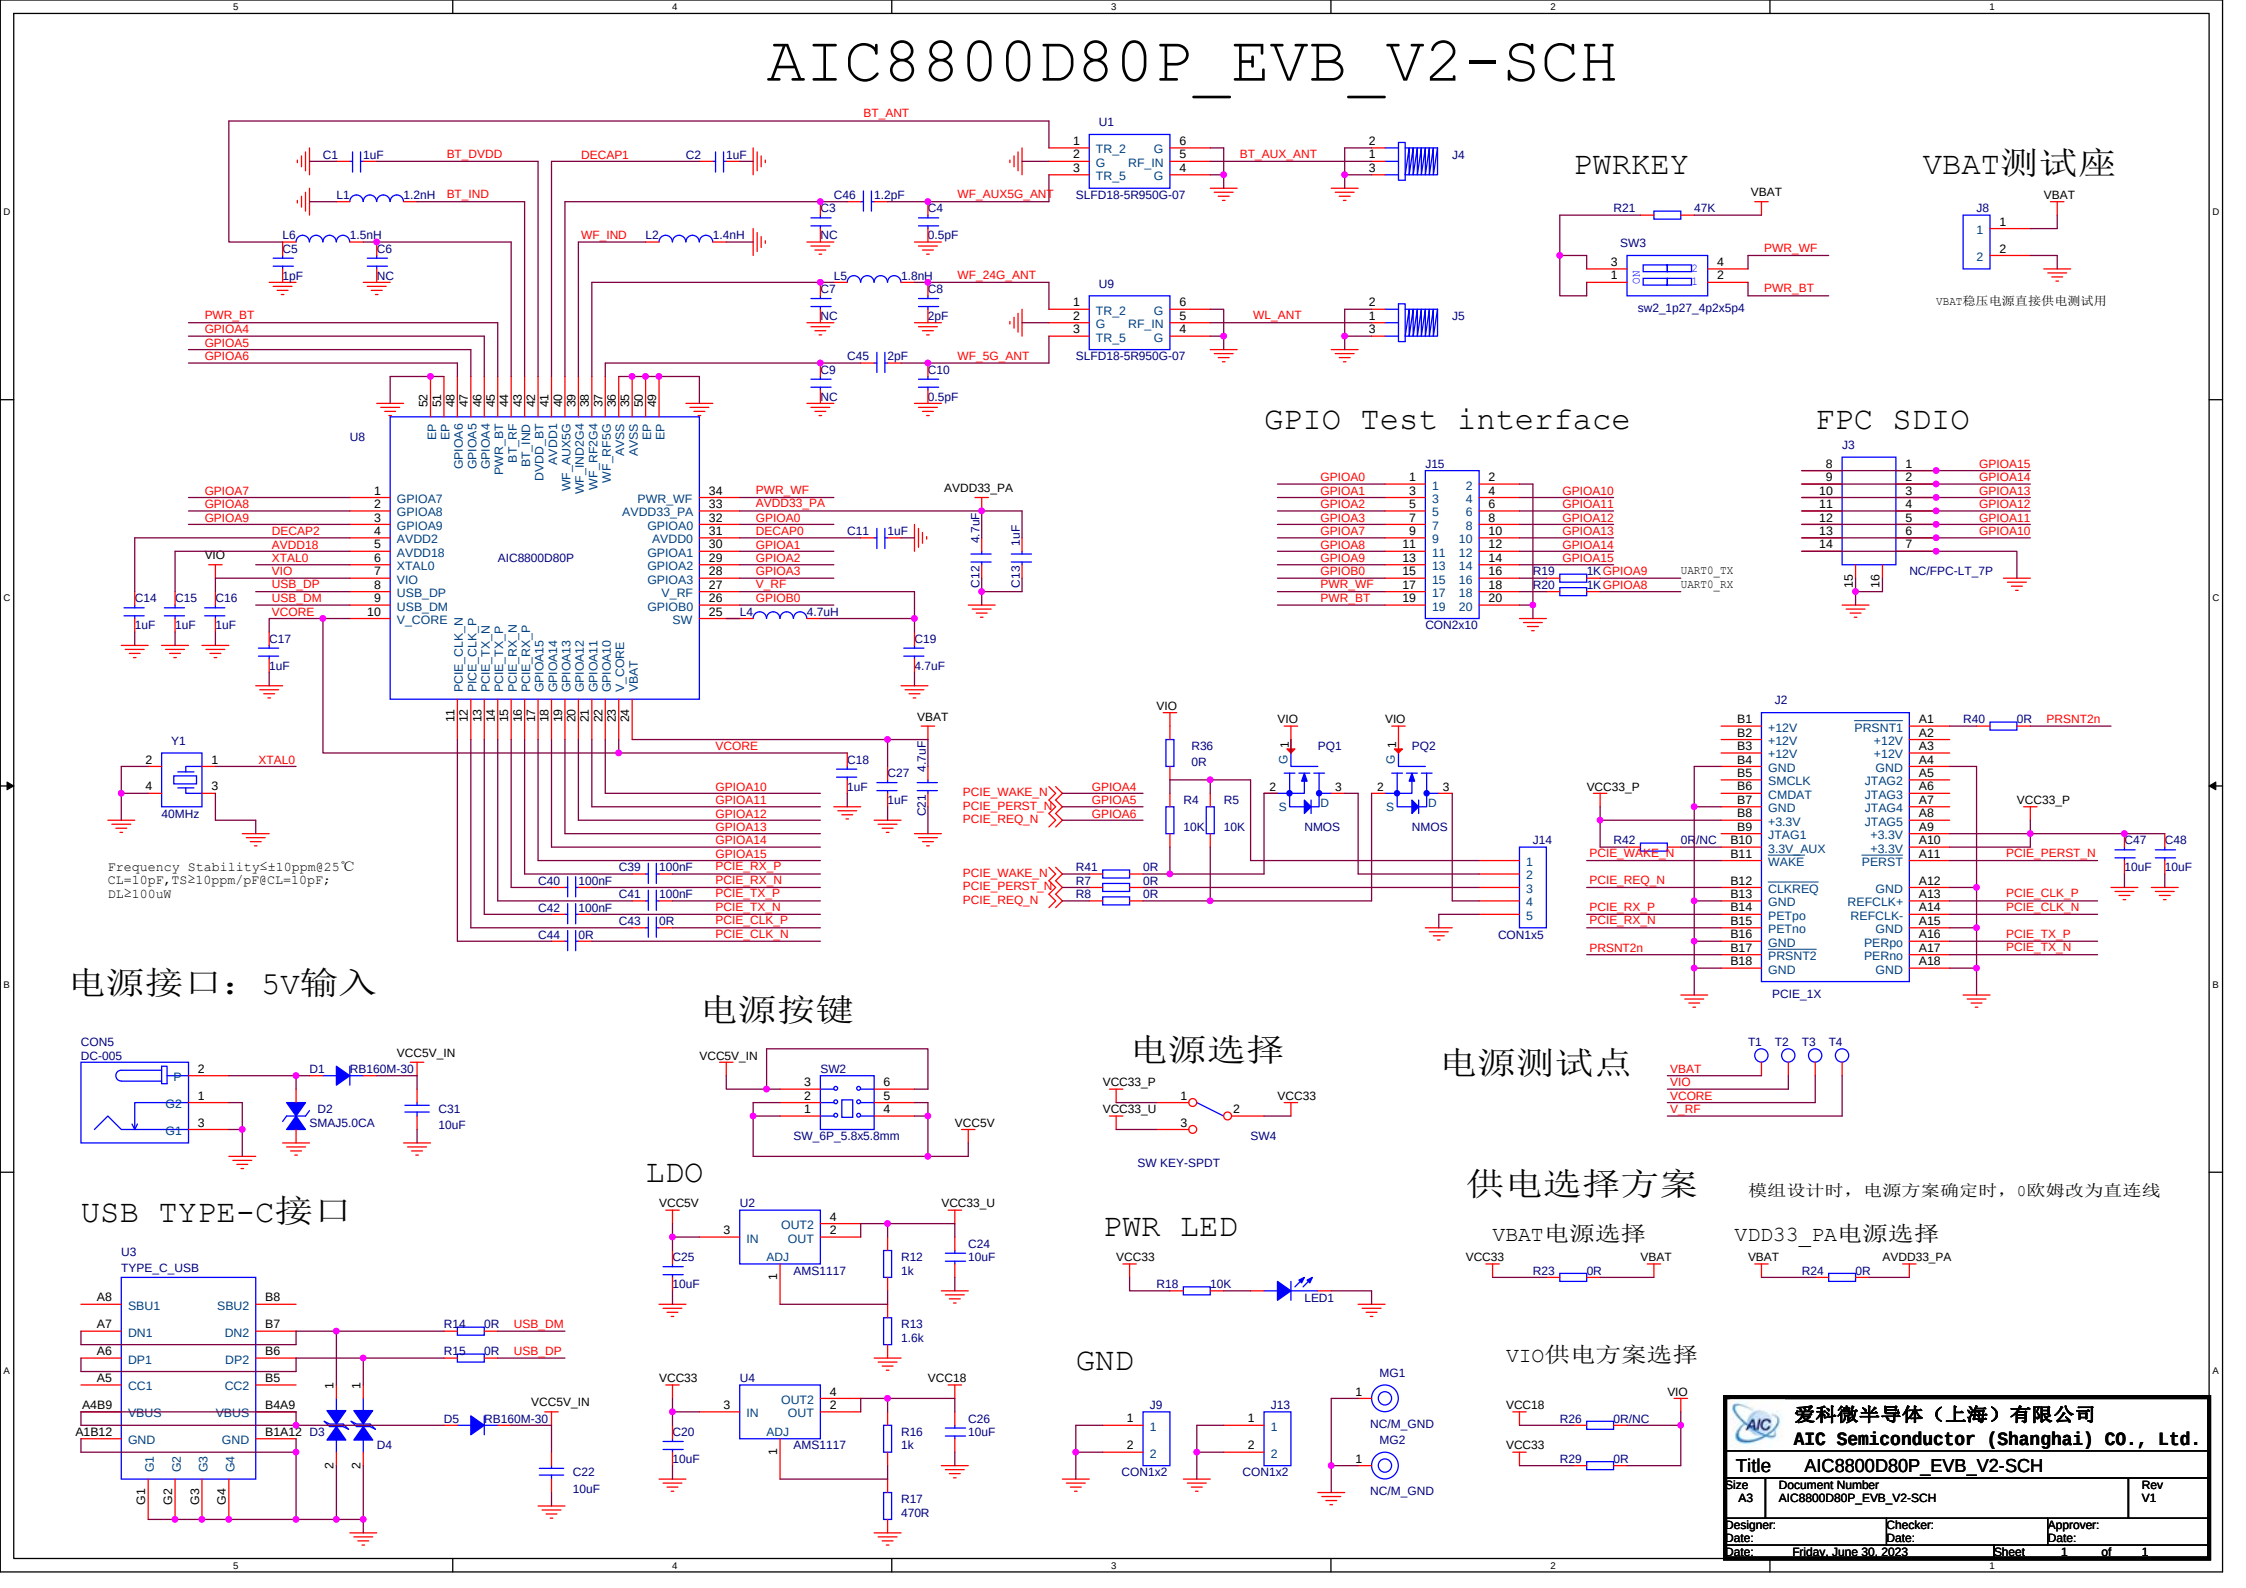
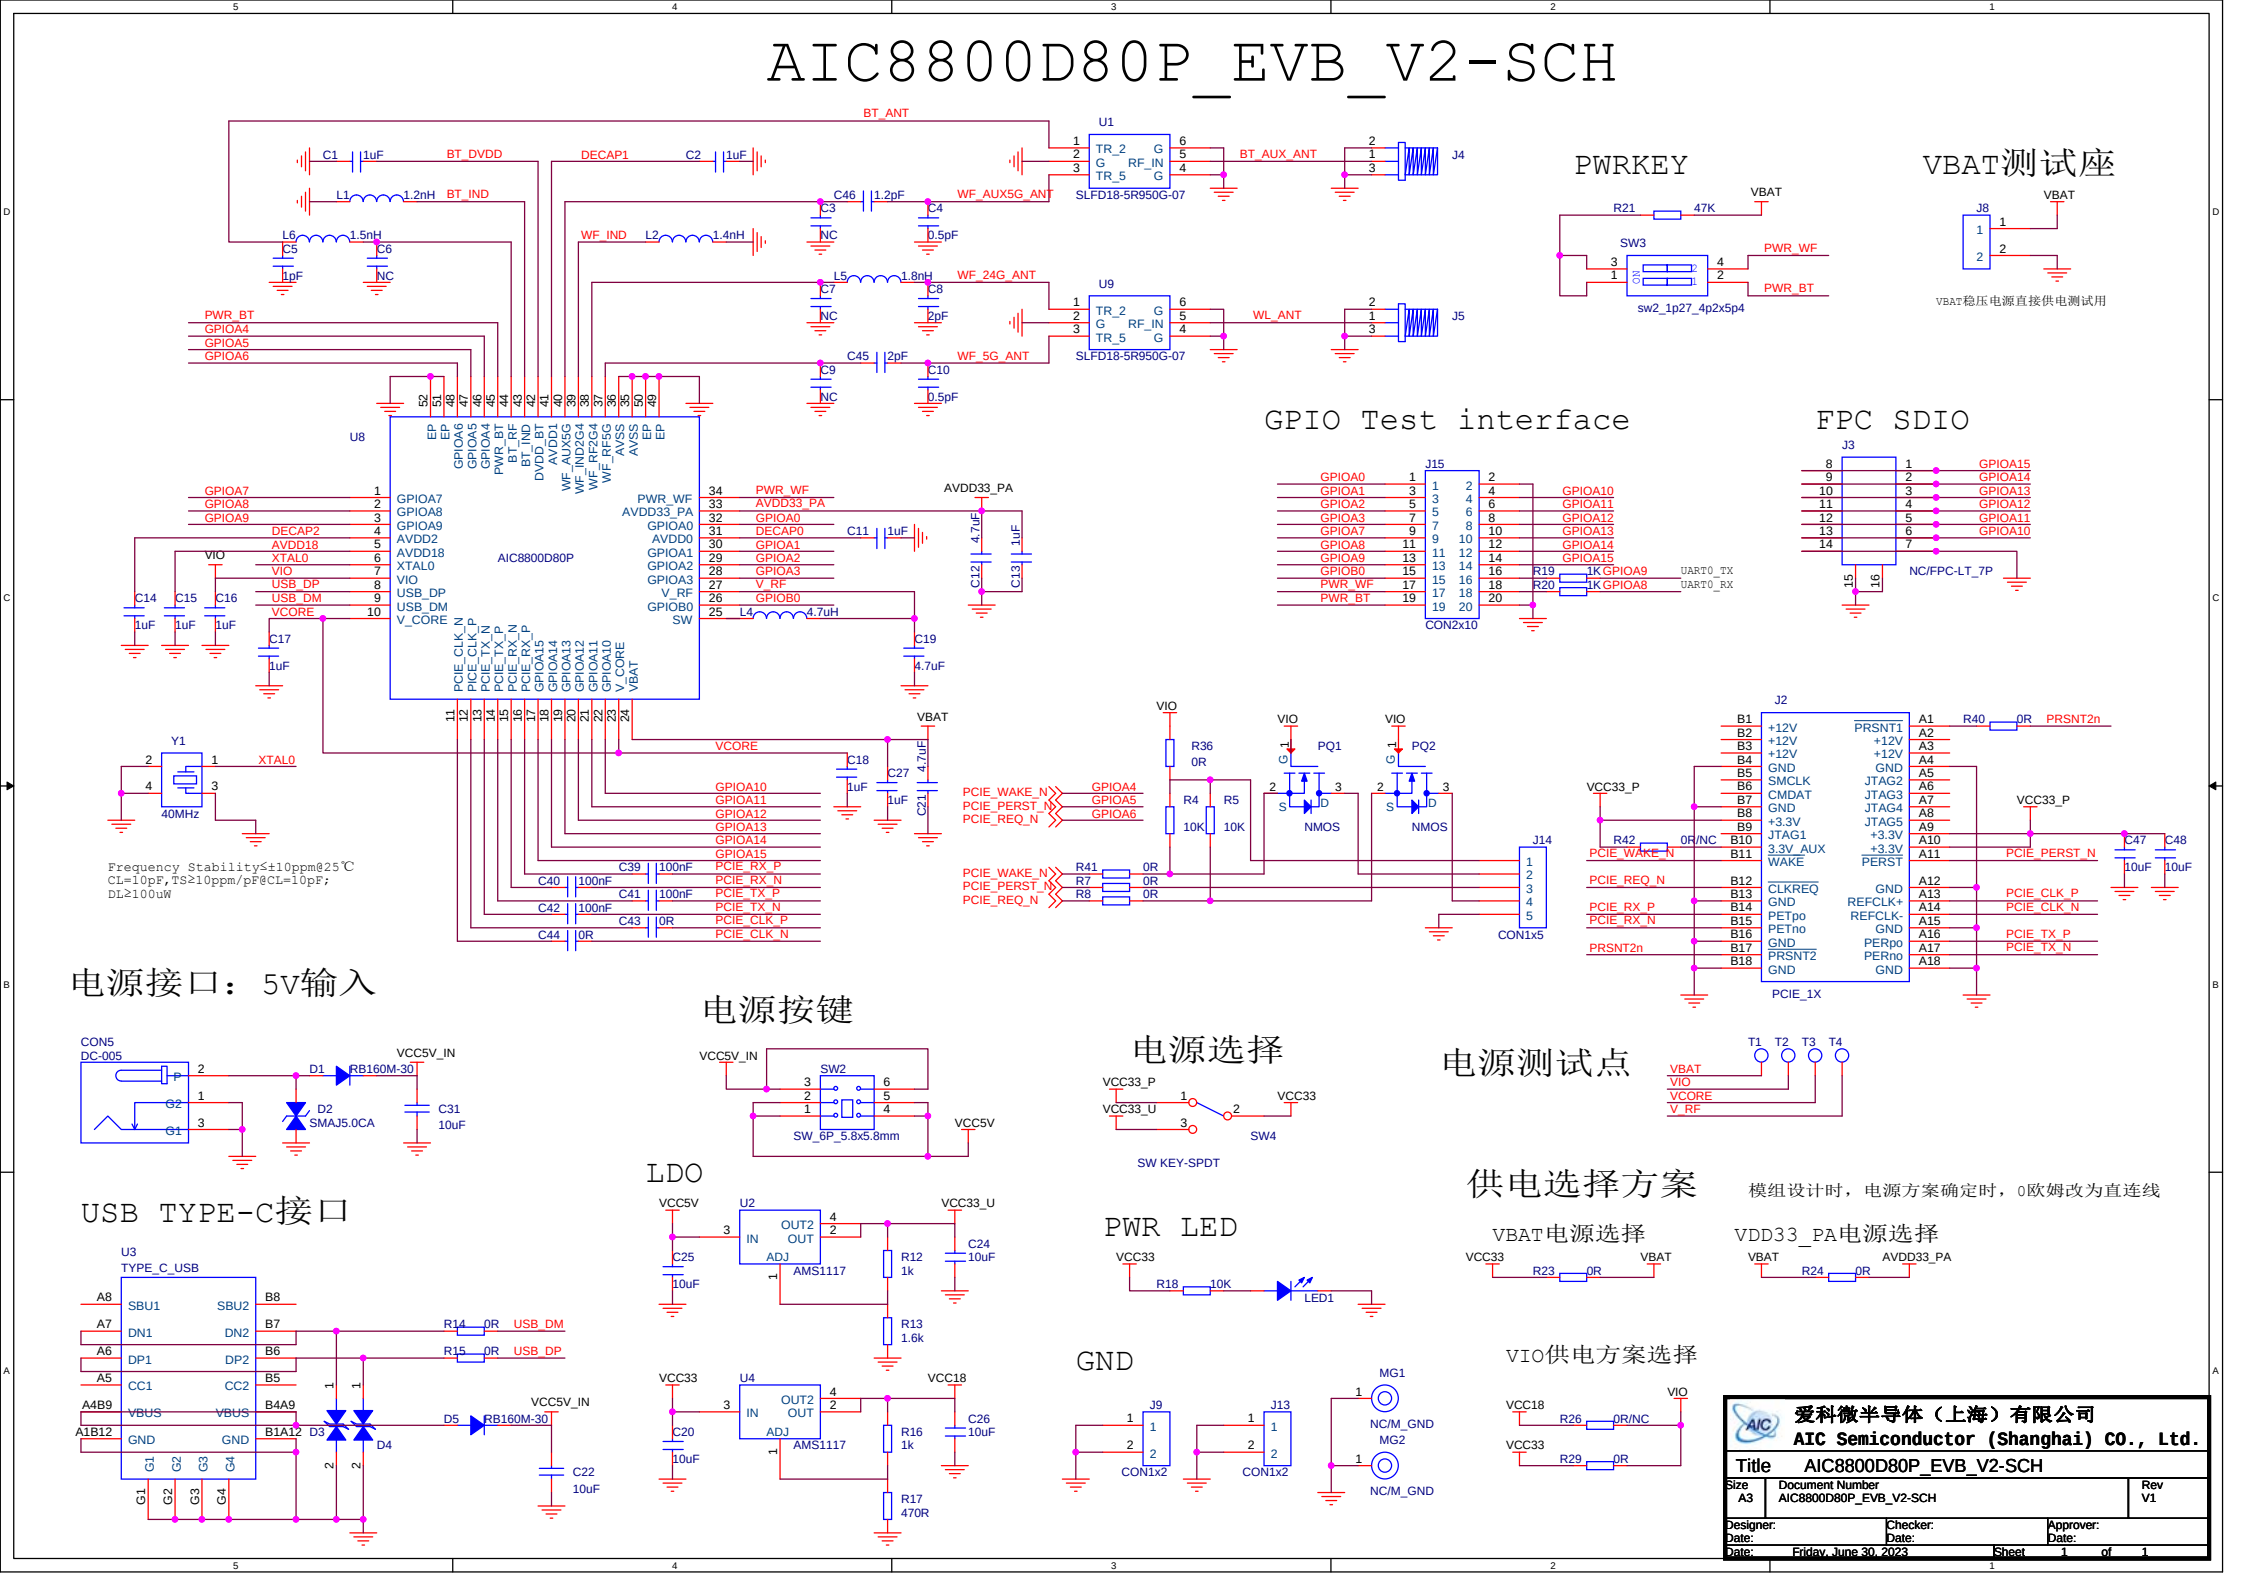
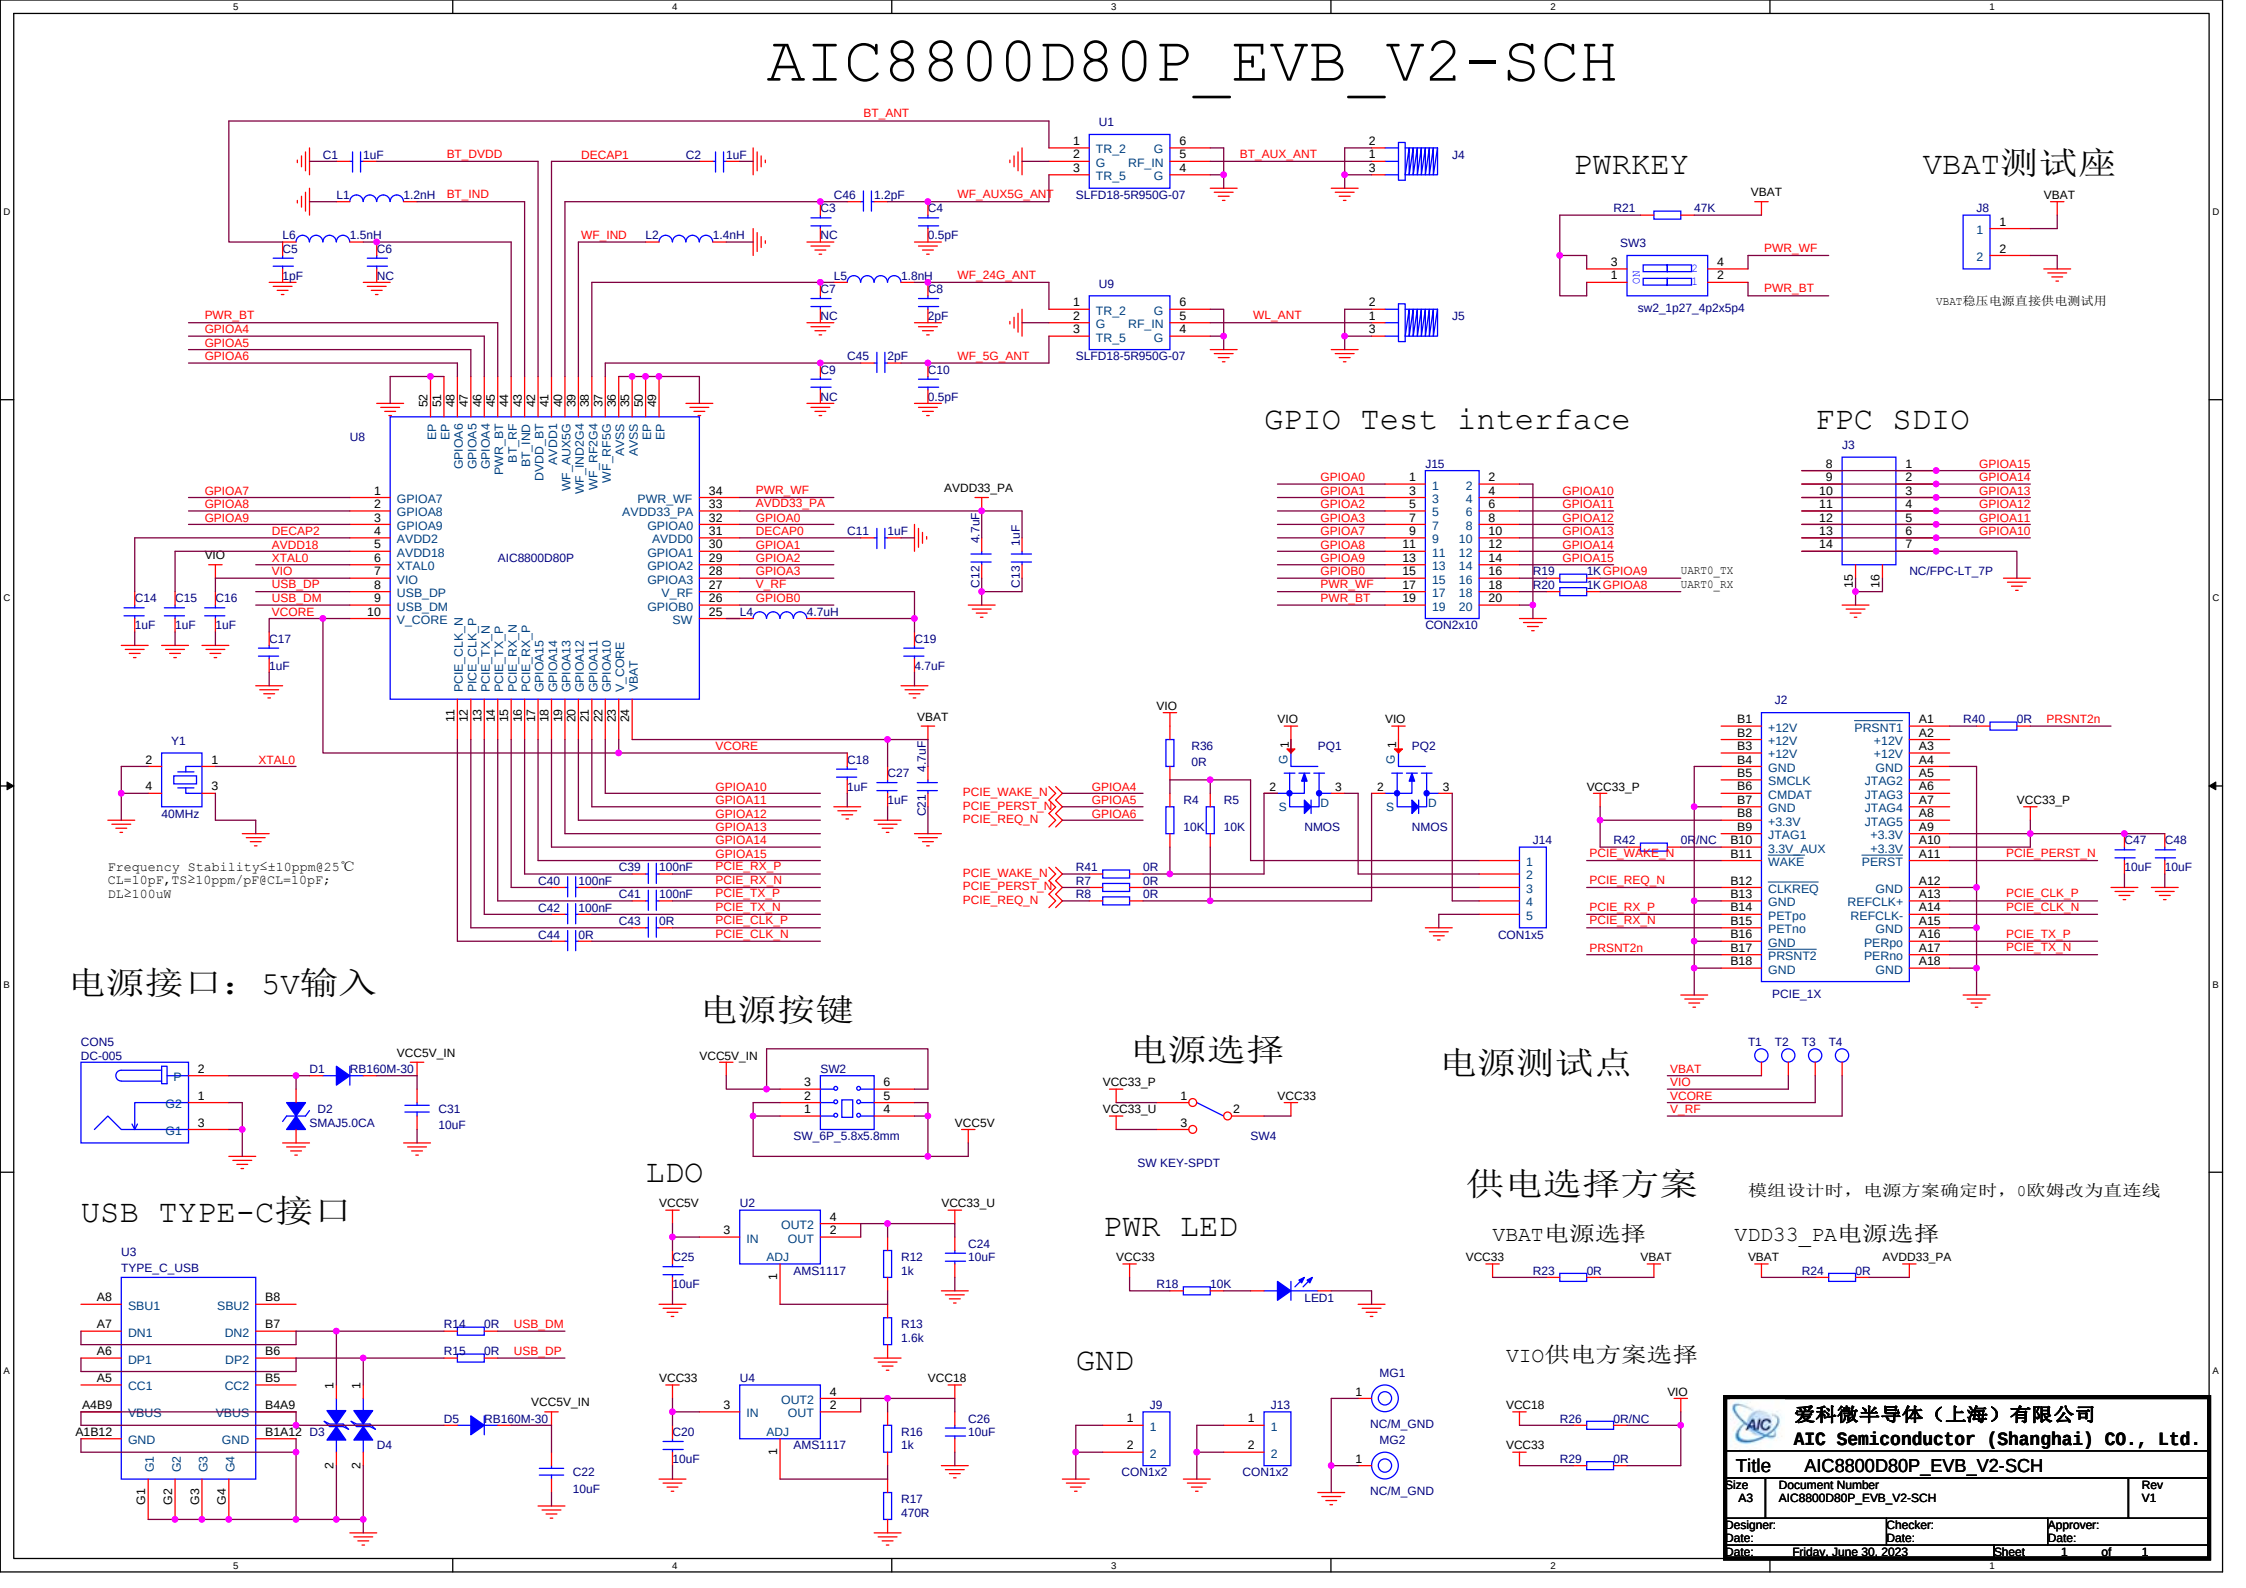
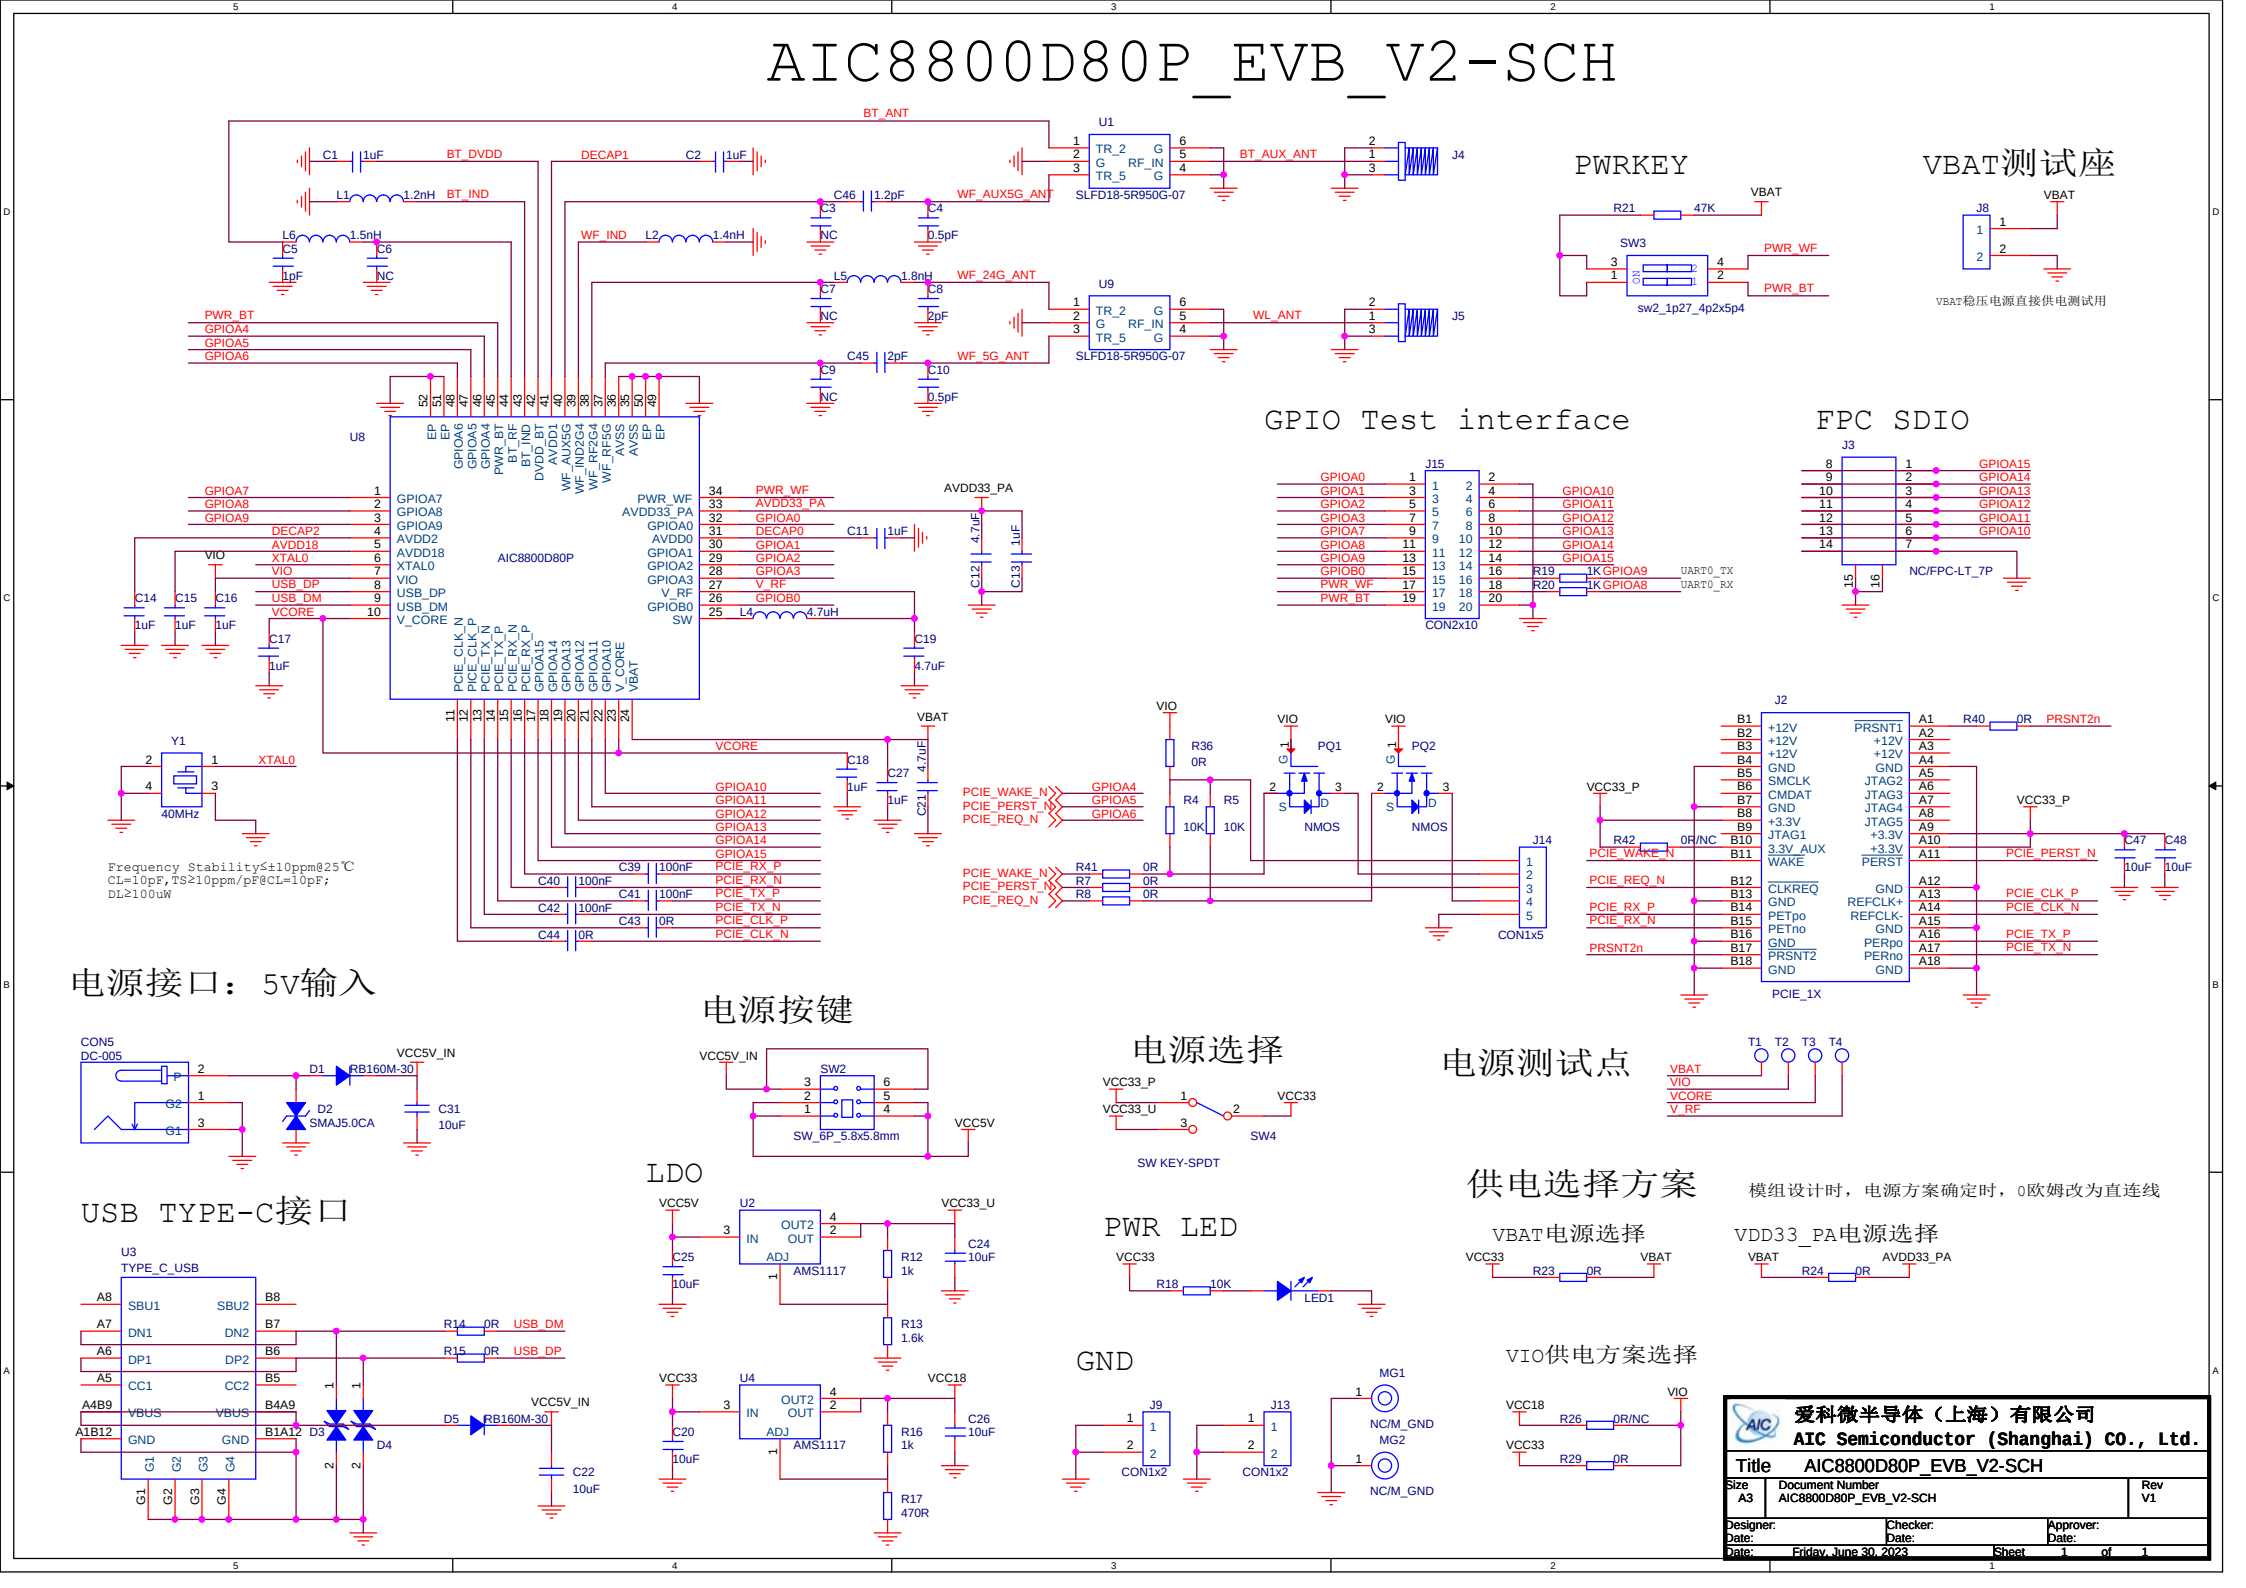
爱科技半导体（上海）有限公司
AIC Semiconductor (Shanghai) CO., Ltd.

Title AIC8800D80P_EVB_V2-SCH

Size A3 Document Number AIC8800D80P_EVB_V2-SCH Rev V1

Designer: Date: Checker: Date: Approver: Date:

Date: Friday, June 30, 2023 Sheet 1 of 1

[illegible][illegible][illegible][illegible]

AIC8800D80P_EVB_V2-SCH

BT ANT

BT_VDD

BT_IND

BT_AUX ANT

WF_IND

WF_24G ANT

WF_5G ANT

WL ANT

PWRKEY

VBAT测试座

GPIO Test interface

FPC SDIO

电源接口：5V输入

电源按键

电源选择

电源测试点

供电选择方案

USB TYPE-C接口

LDO

PWR LED

GND

VIO供电方案选择

模组设计时，电源方案确定时，0欧姆改为直连线

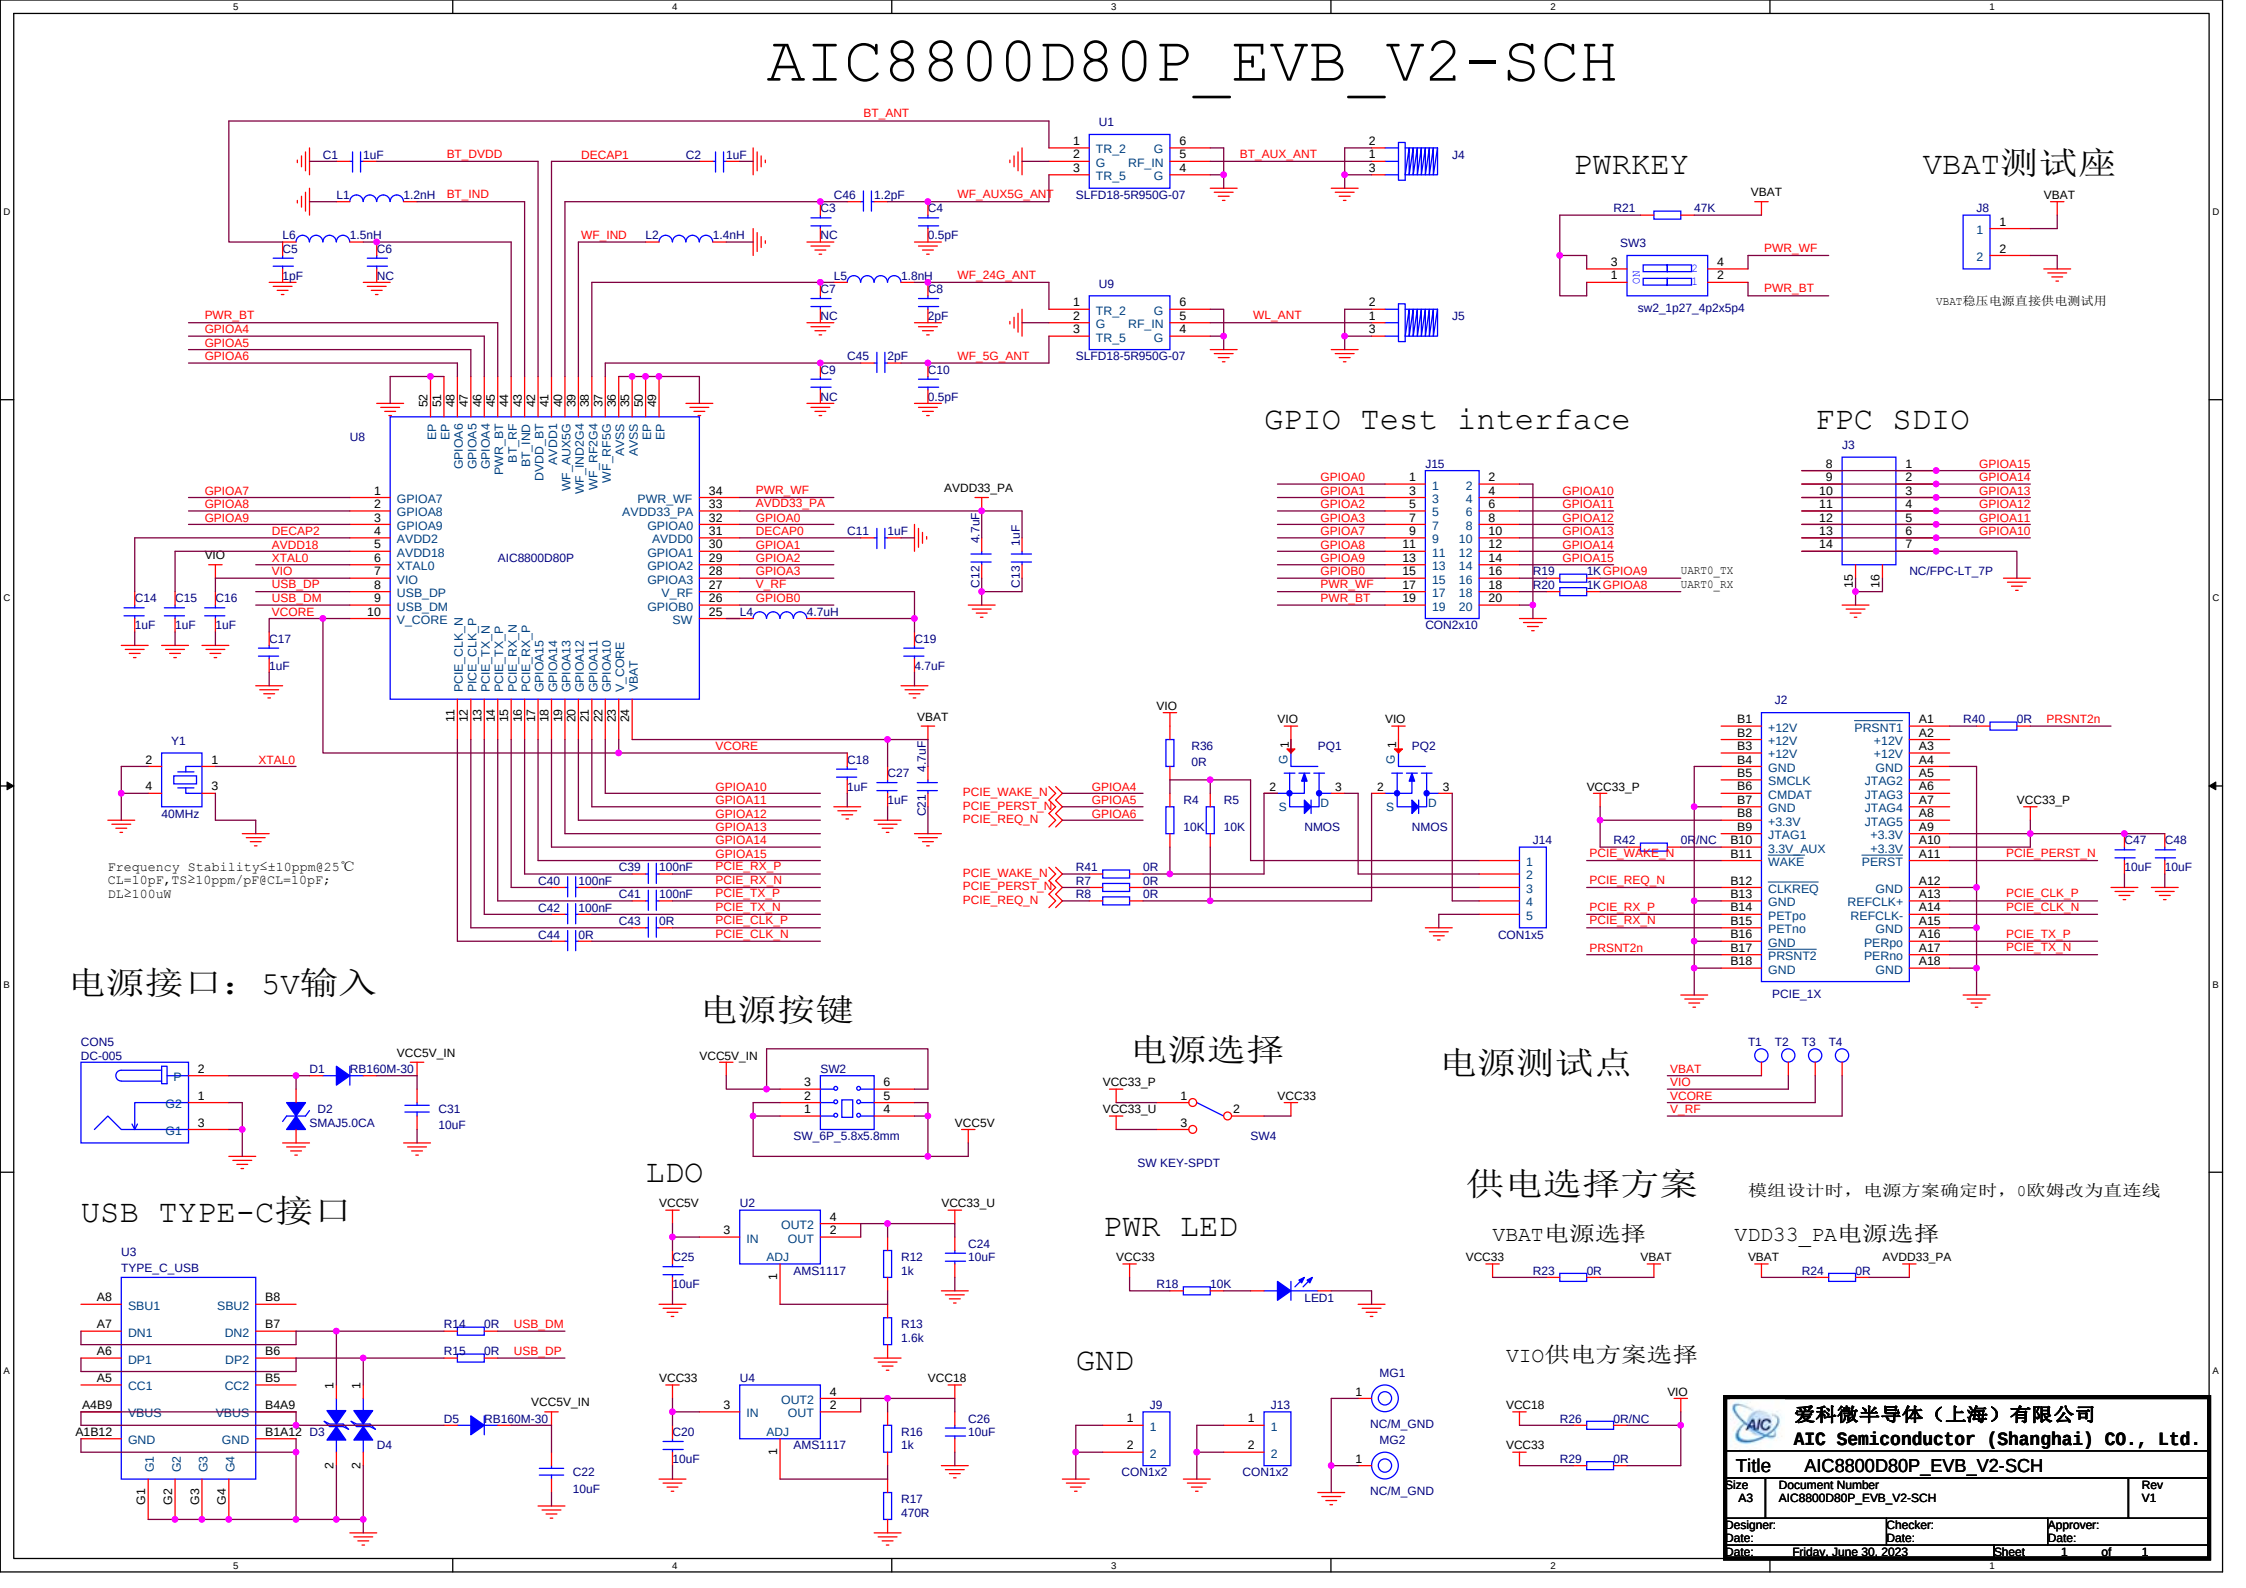
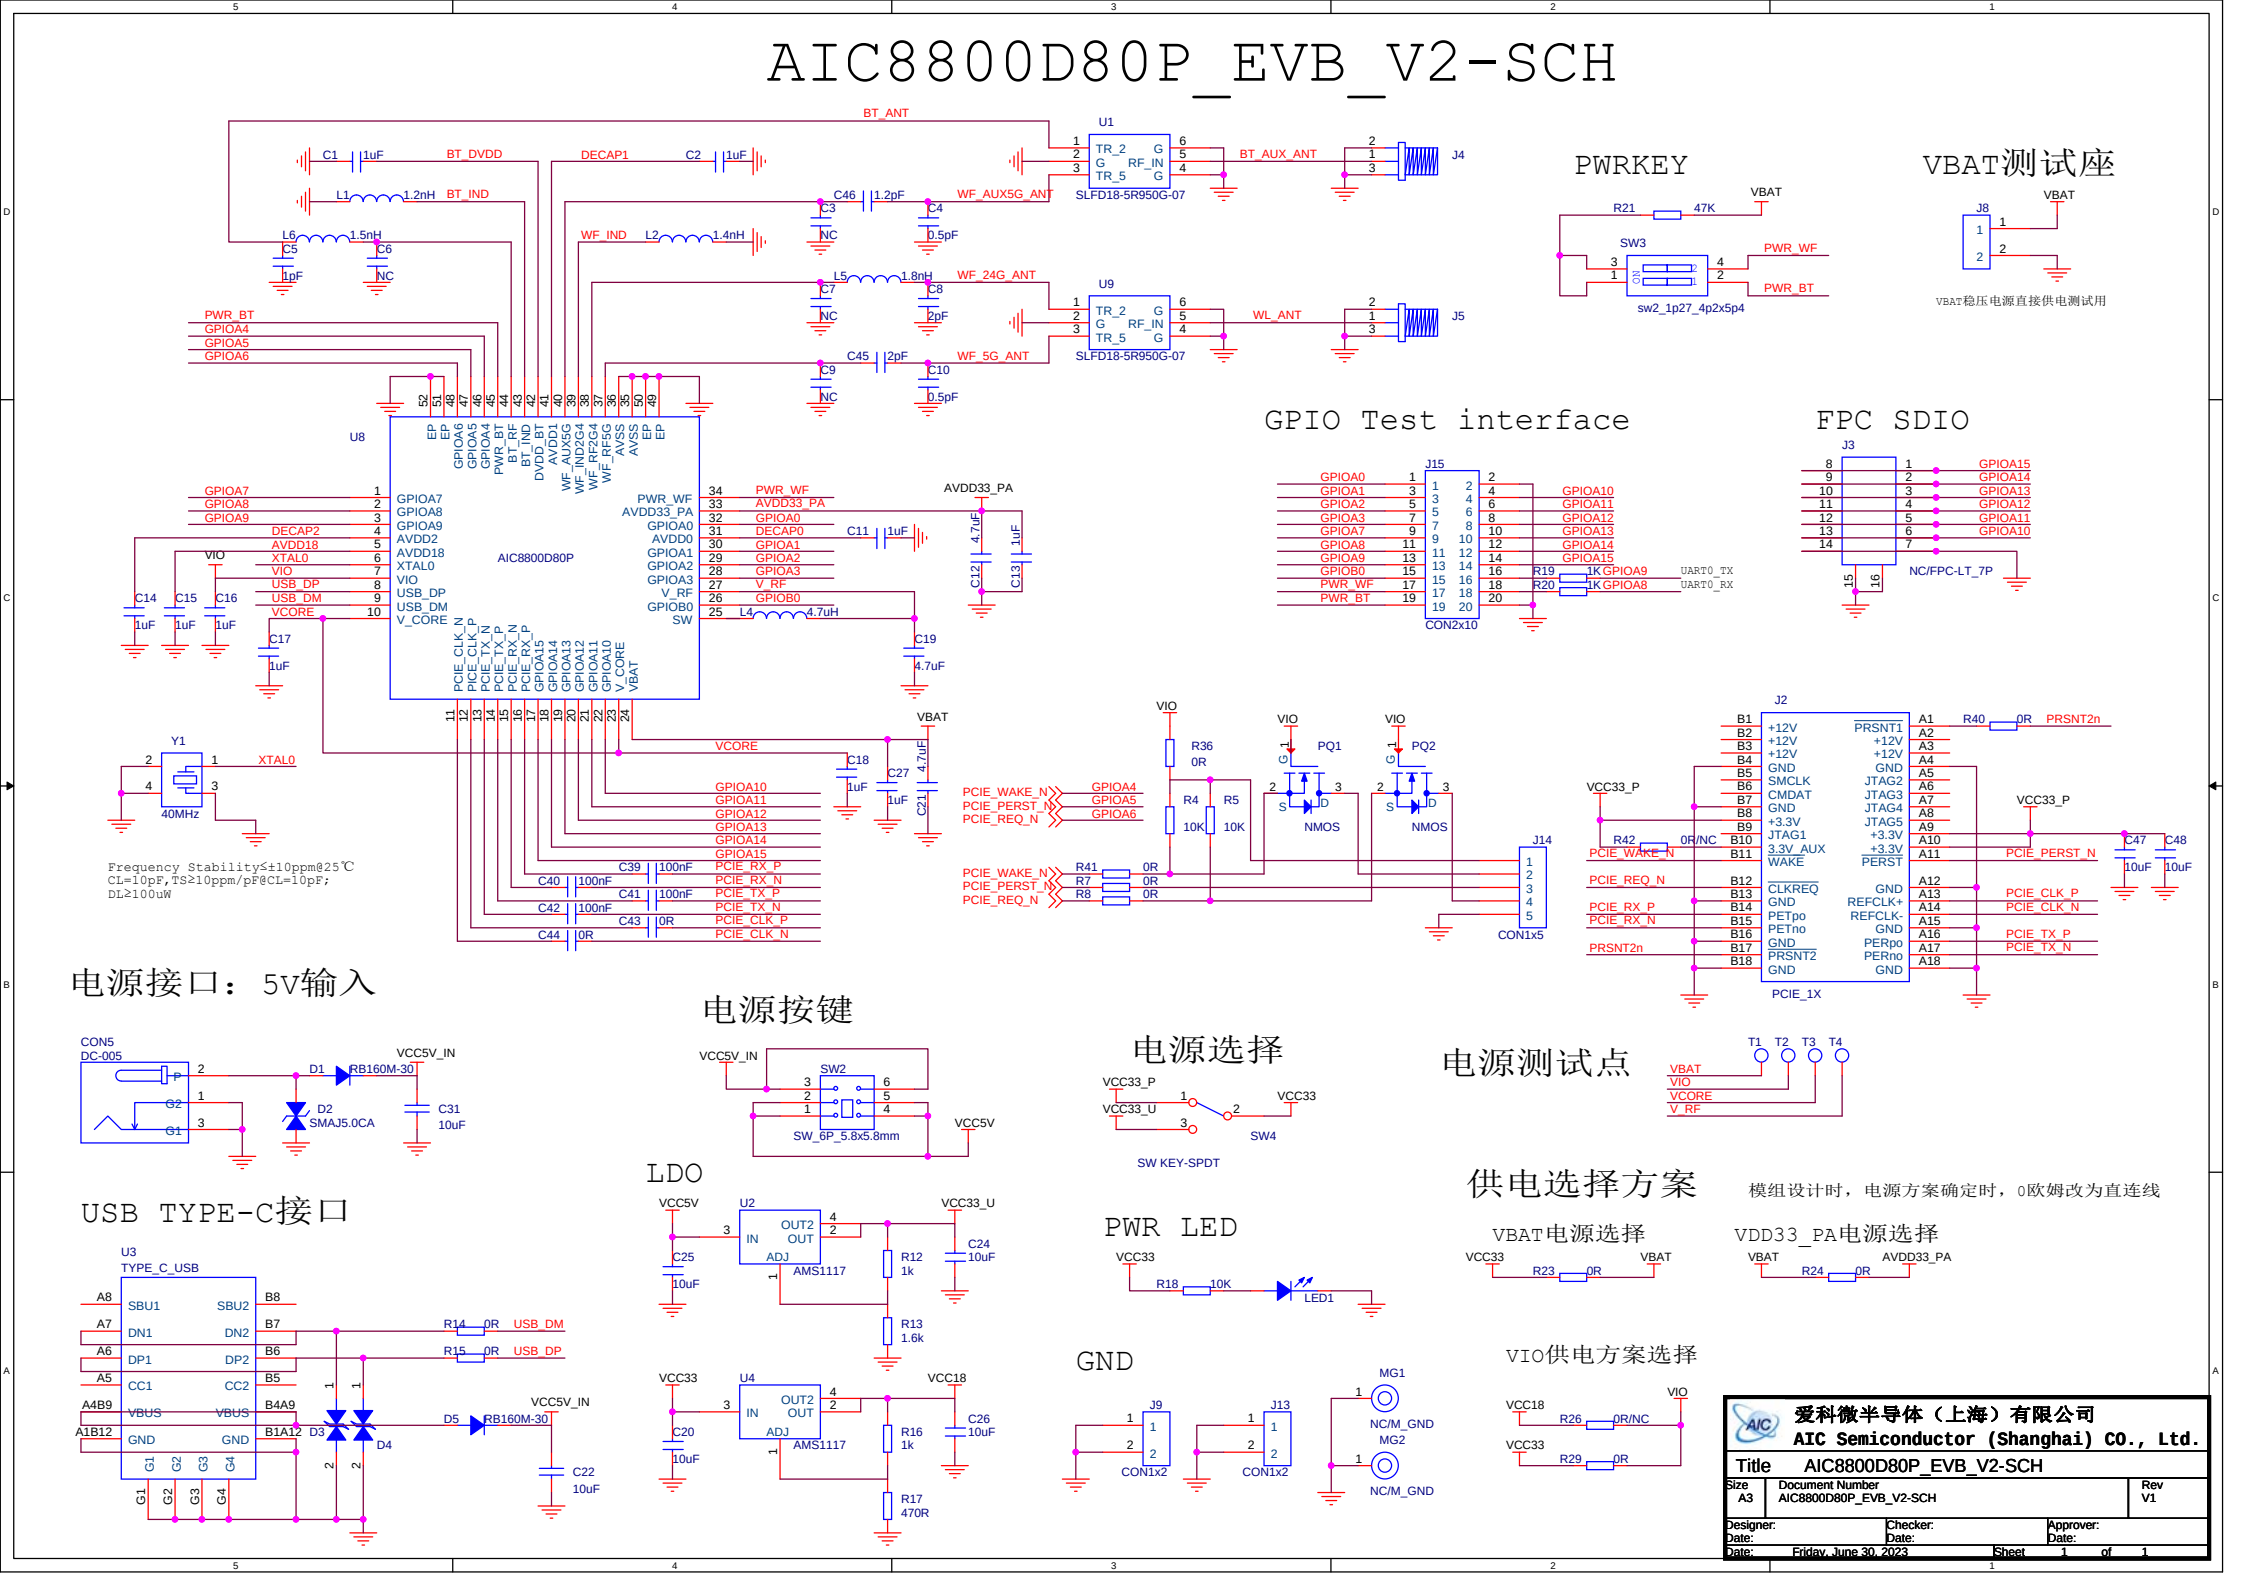
爱微半导体（上海）有限公司
AIC Semiconductor (Shanghai) CO., Ltd.

Title AIC8800D80P_EVB_V2-SCH

Size A3 Document Number AIC8800D80P_EVB_V2-SCH Rev V1

Designer: Date: Checker: Date: Approver: Date:

Date: Friday, June 30, 2023 Sheet 1 of 1

[illegible]

AIC8800D80P_EVB_V2-SCH

Frequency Stability $\leq \pm 10\text{ppm}@25^\circ\text{C}$
CL=10pF, TS $\geq 10\text{ppm/pF}$ at CL=10pF;
DL $\geq 100\text{uW}$

电源接口：5V输入

电源按键

电源选择

电源测试点

供电选择方案

USB TYPE-C接口

LDO

PWR LED

GND

VIO供电方案选择

模组设计时，电源方案确定时，0欧姆改为直连线

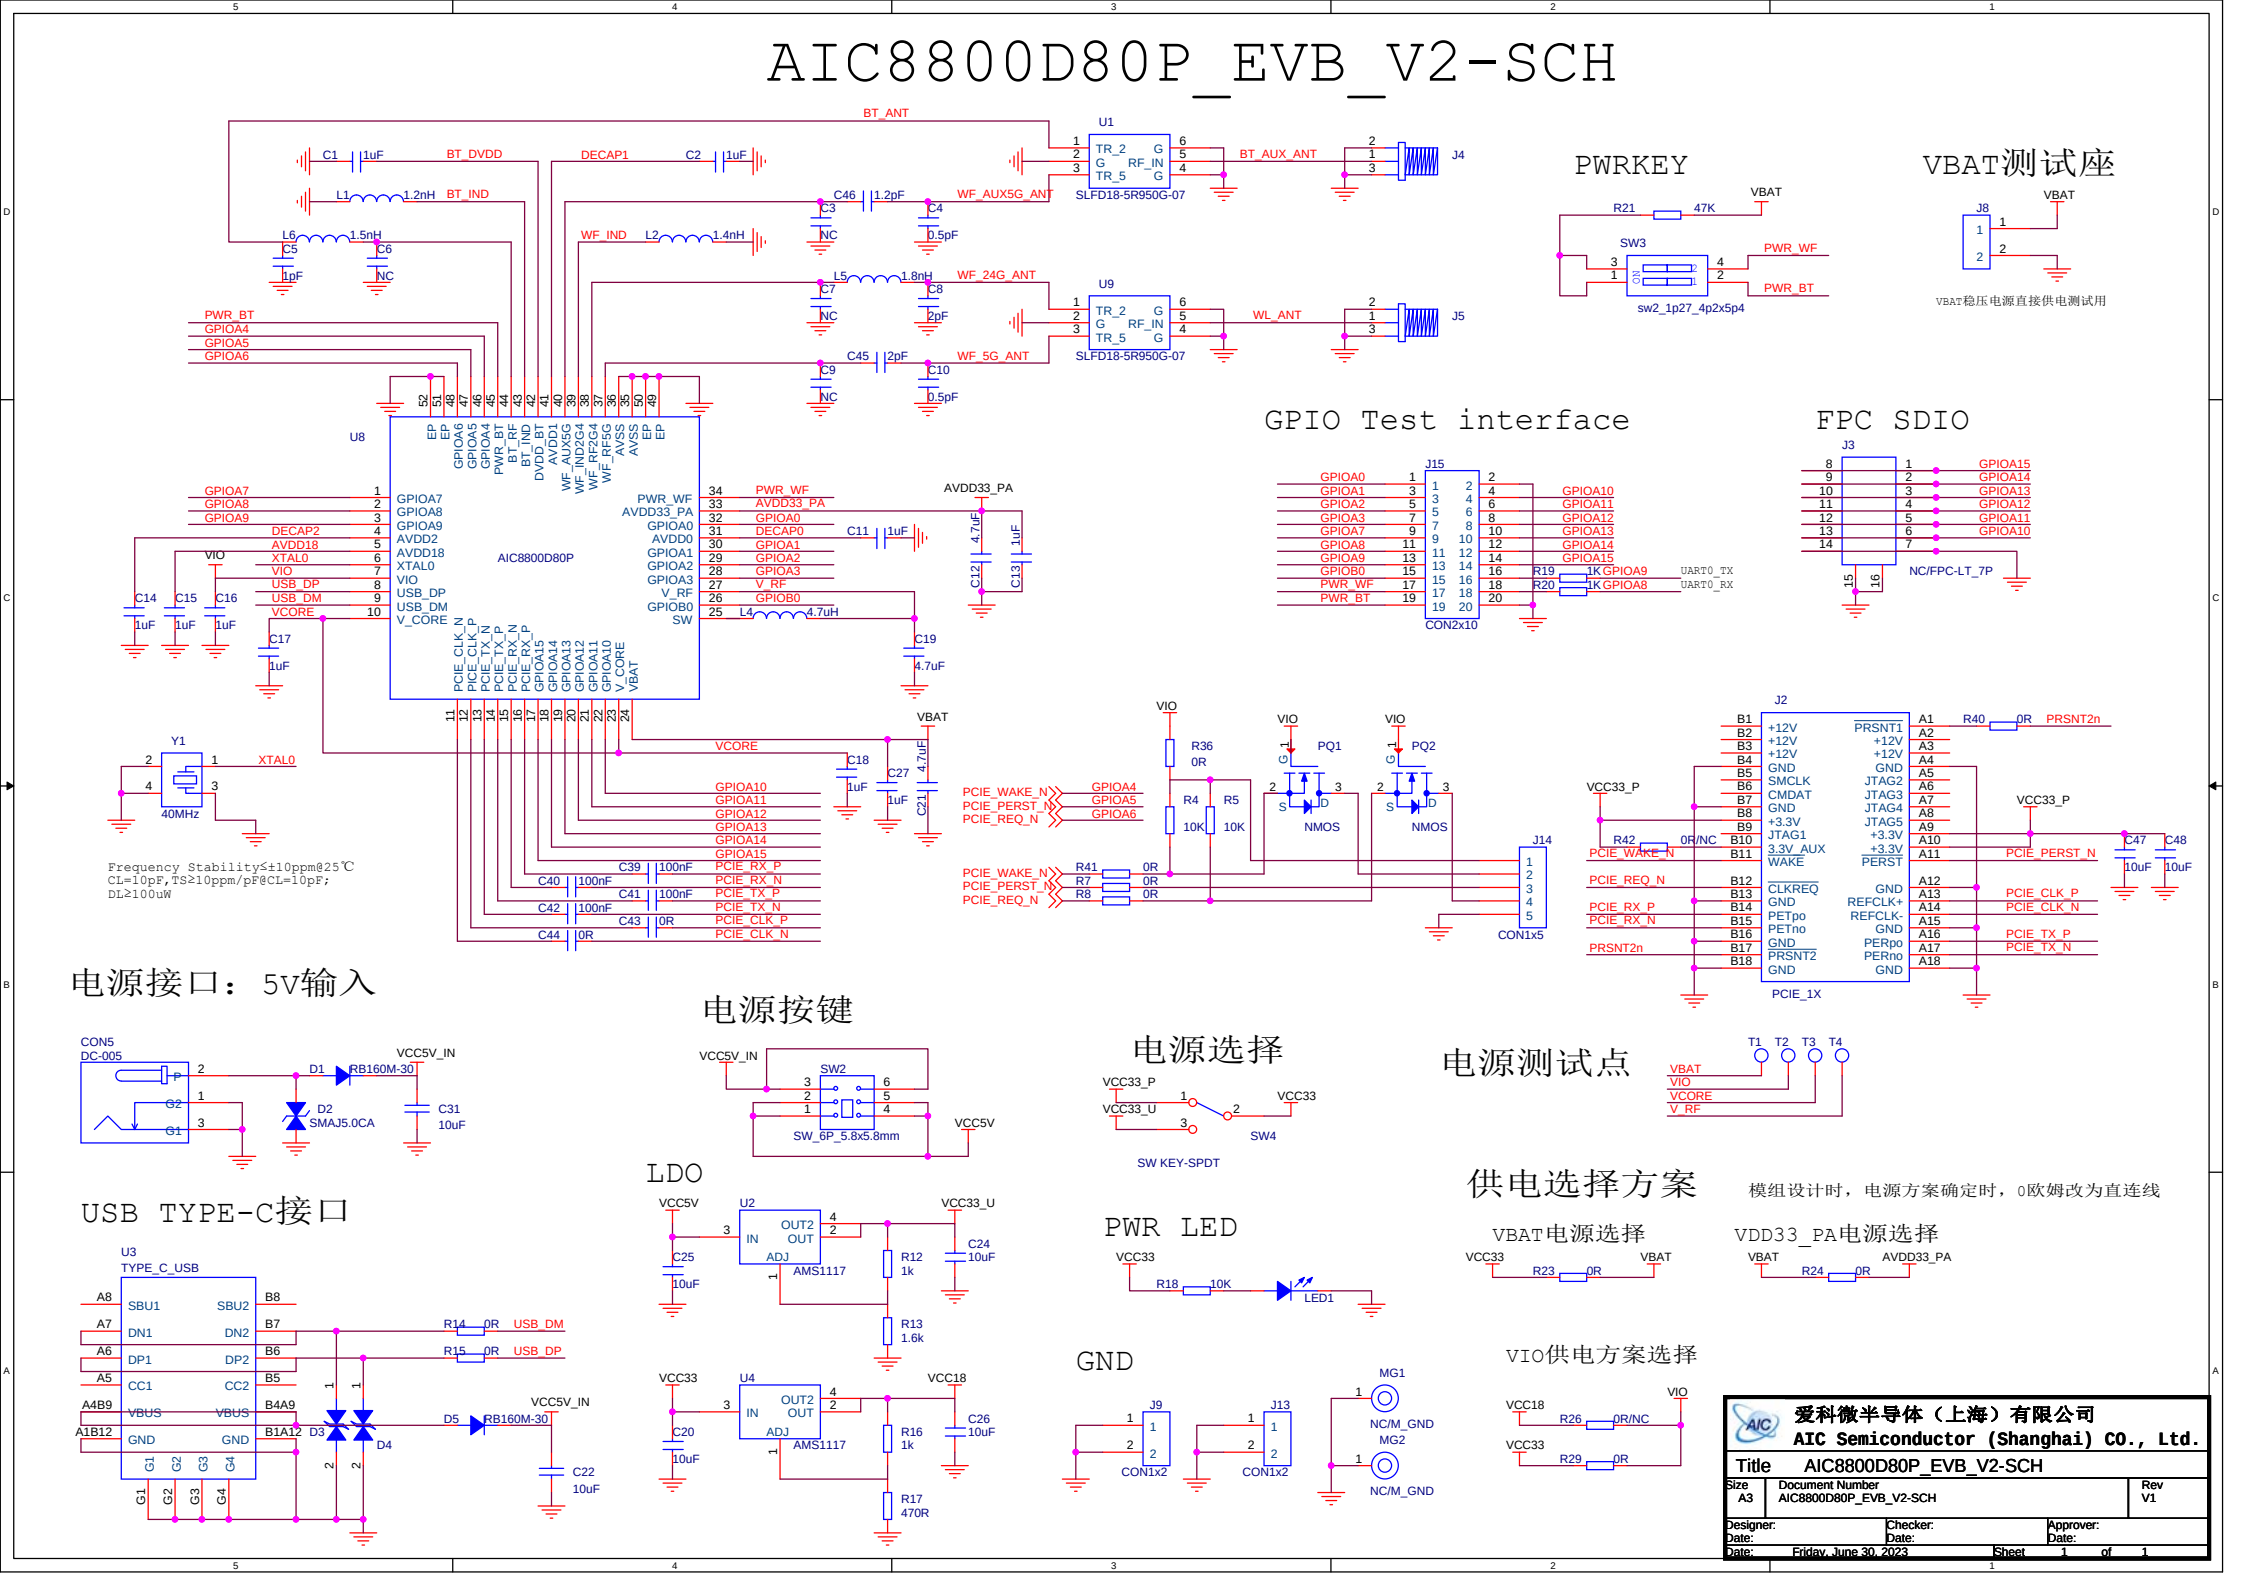
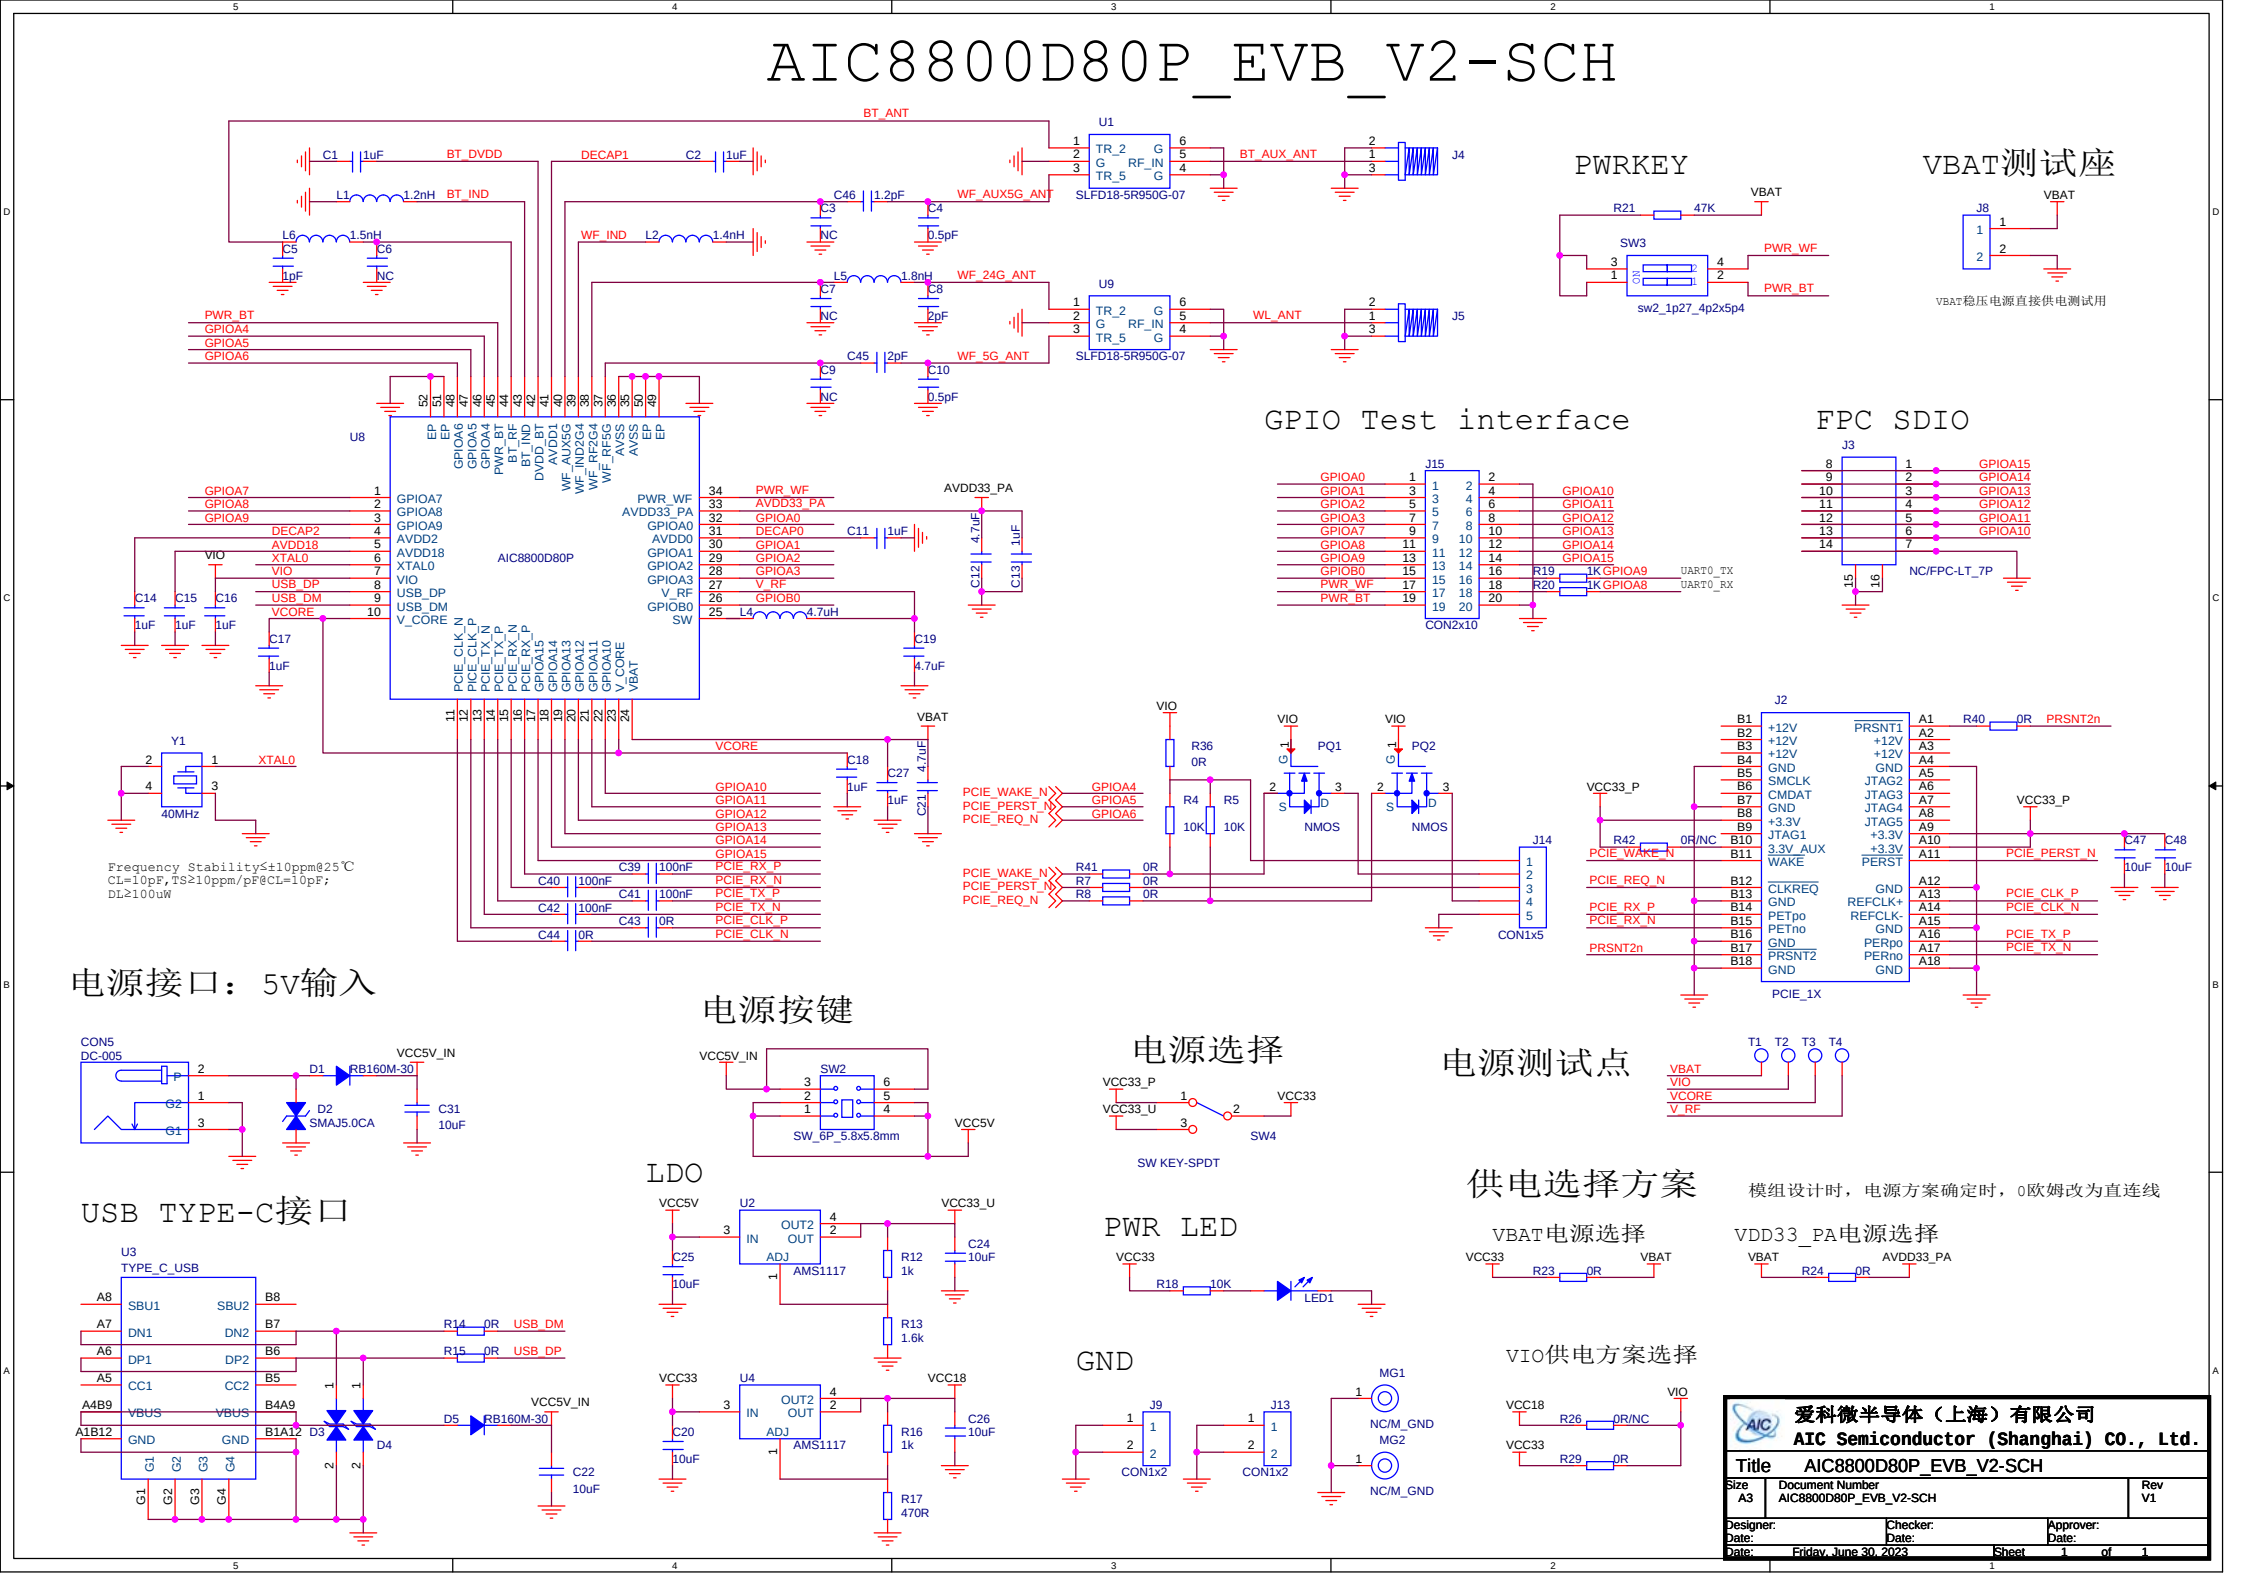
爱科微半导体（上海）有限公司
AIC Semiconductor (Shanghai) CO., Ltd.

Title AIC8800D80P_EVB_V2-SCH

Size A3 Document Number AIC8800D80P_EVB_V2-SCH Rev V1

Designer: Date: Checker: Date: Approver: Date:

Date: Friday, June 30, 2023 Sheet 1 of 1

[illegible]

AIC8800D80P_EVB_V2-SCH

BT ANT

BT_VDD

BT_IND

BT_AUX ANT

WF ANT

WL ANT

PWRKEY

VBAT测试座

GPIO Test interface

FPC SDIO

电源接口：5V输入

电源按键

电源选择

电源测试点

供电选择方案

模组设计时，电源方案确定时，0欧姆改为直连线

USB TYPE-C接口

LDO

PWR LED

GND

VIO供电方案选择

爱科微电子（上海）有限公司
AIC Semiconductor (Shanghai) CO., Ltd.

Title: AIC8800D80P_EVB_V2-SCH

Size: A3

Document Number: AIC8800D80P_EVB_V2-SCH

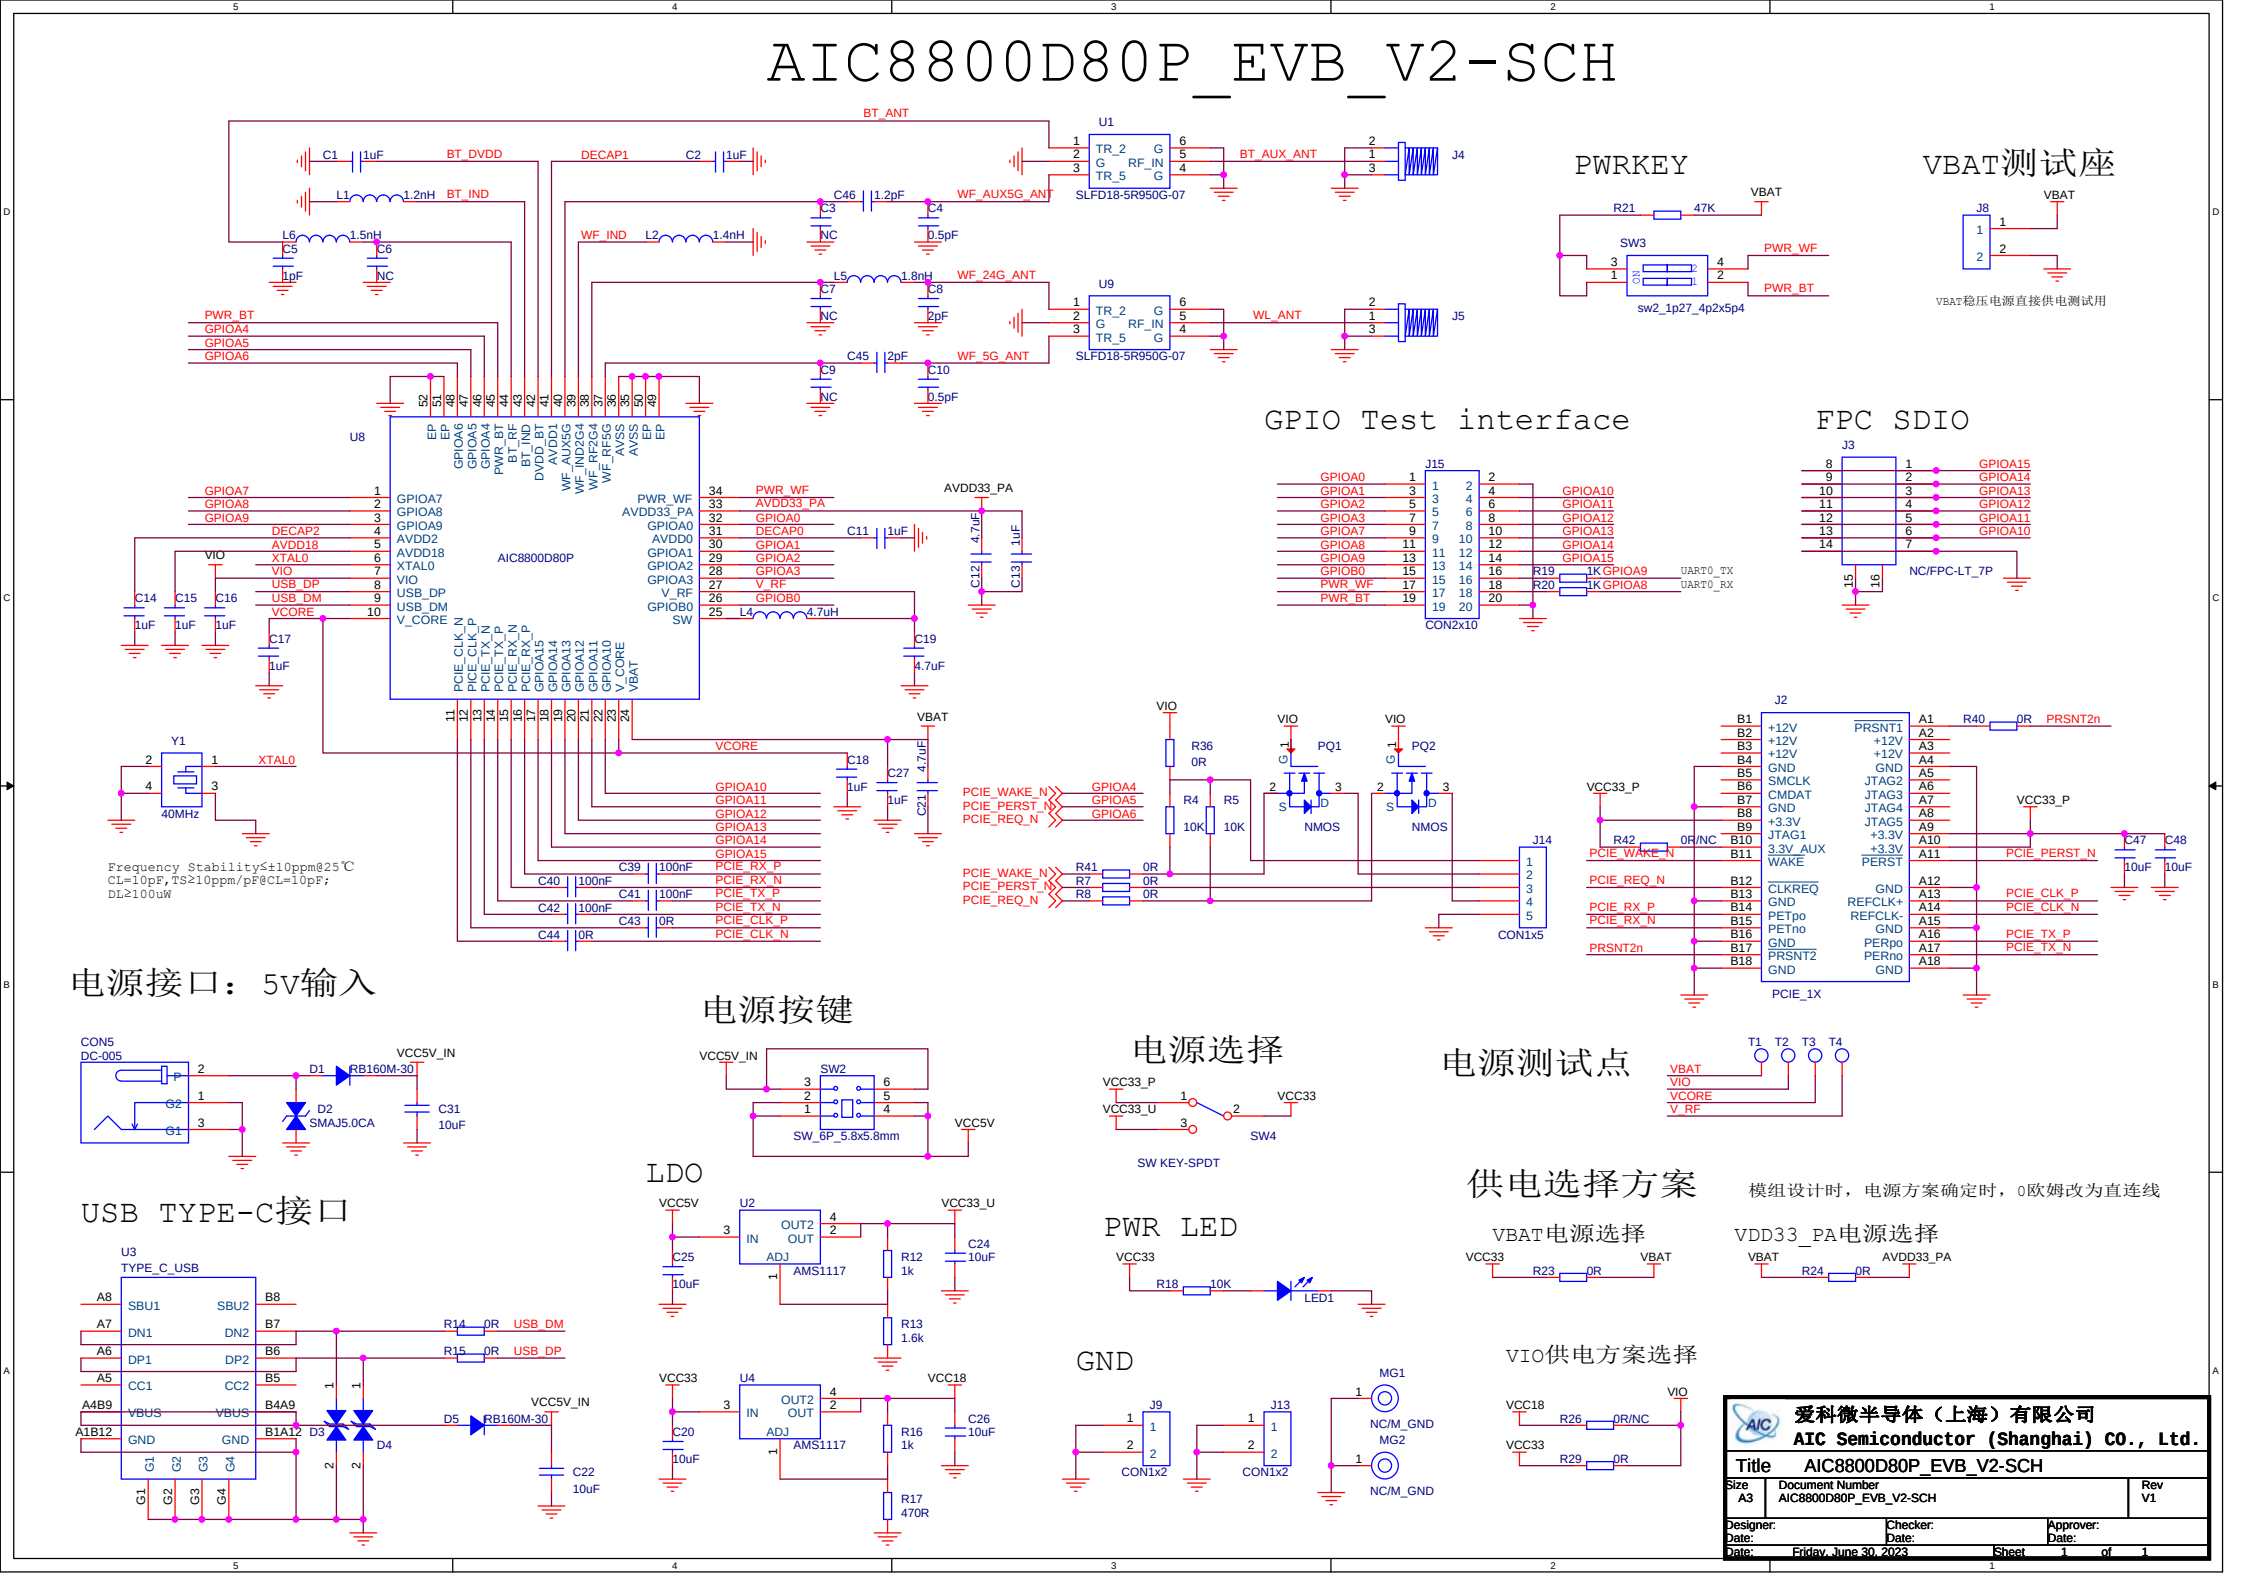
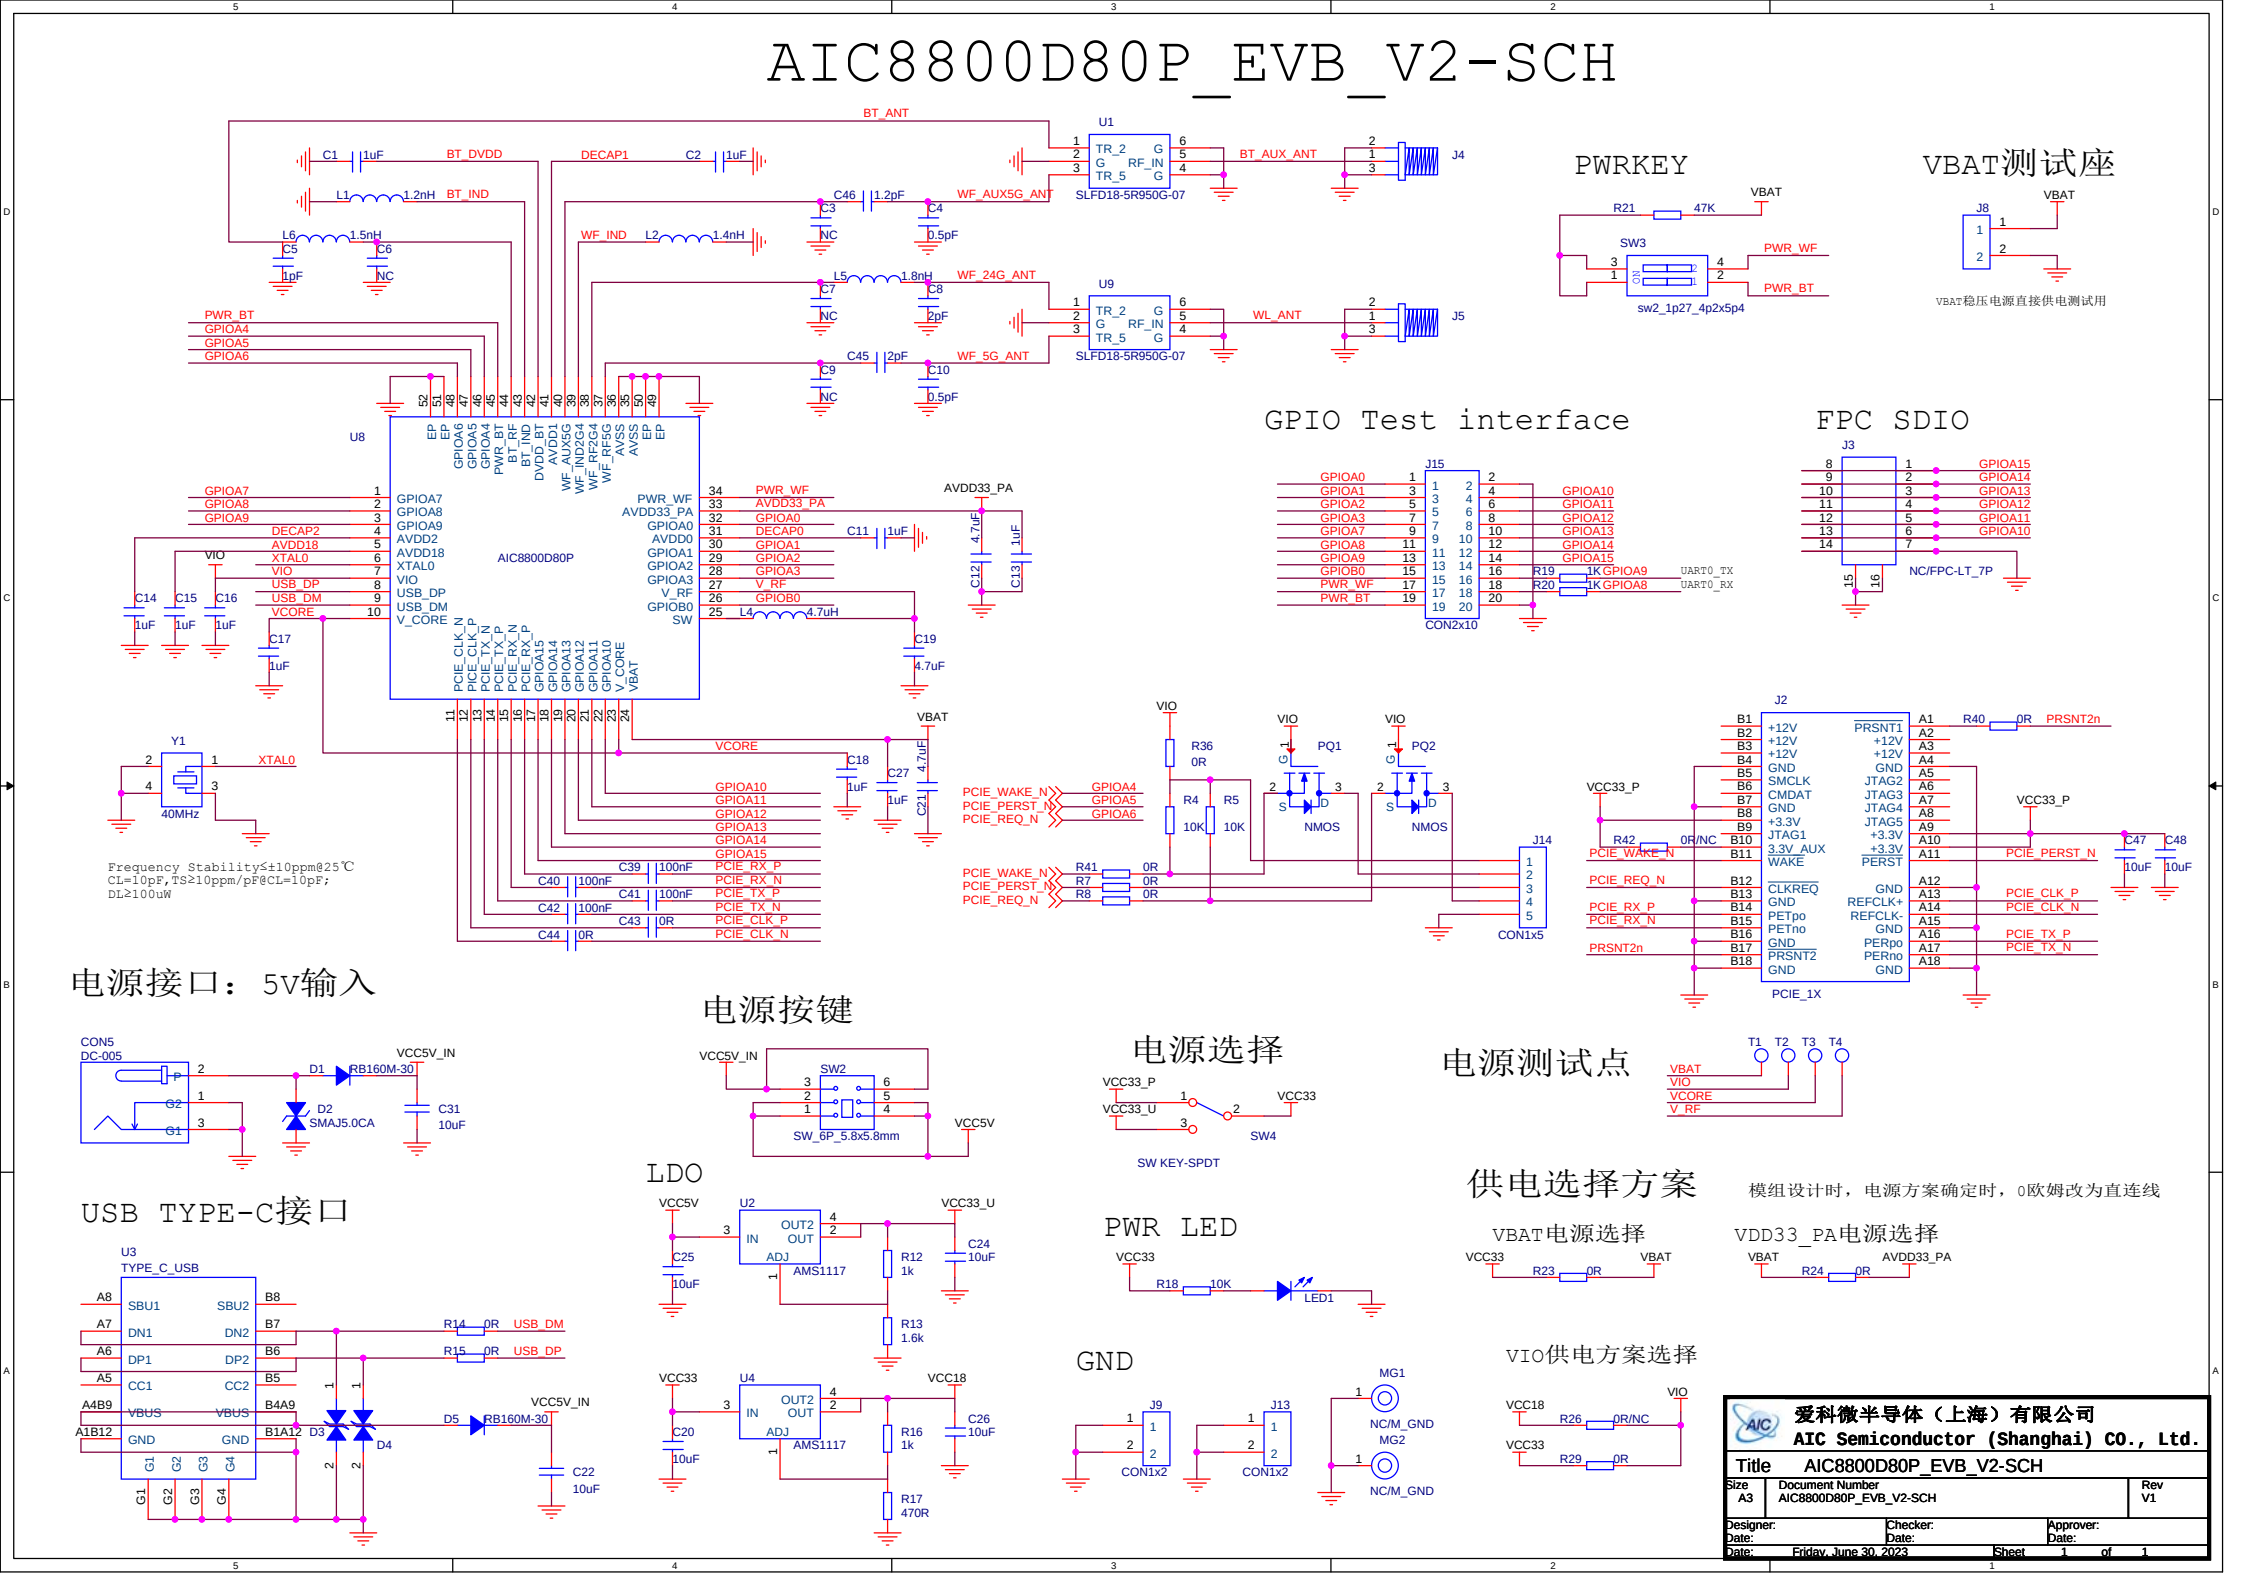
Rev: V1

Designer: Date: Friday, June 30, 2023

Checker: Date:

Approver: Date:

Sheet: 1 of 1

[illegible][illegible]