

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 611, y: 1497

PC0

2960-24TT Switch3

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.0.2: bytes=32 time<1ms TTL=255
Reply from 192.168.0.2: bytes=32 time<1ms TTL=255
Reply from 192.168.0.2: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>telnet 192.168.0.2
Trying 192.168.0.2 ...Open

User Access Verification

Username: student
Password:
% Login invalid

Username: student
Password:
% Login invalid

Username: student
Password:
Switch>en
% No password set.
Switch>exit

[Connection to 192.168.0.2 closed by foreign host]
C:\>
```

☐ Top

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 616, y: 1431

PC0

2960-24TT Switch3

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>telnet 192.168.0.2
Trying 192.168.0.2 ...Open

User Access Verification

Username: student
Password:
% Login invalid

Username: student
Password:
% Login invalid

Username: student
Password:
Switch>en
% No password set.
Switch>exit


[Connection to 192.168.0.2 closed by foreign host]
C:\>telnet 192.168.0.2
Invalid Command.

C:\>telnet 192.168.0.2
Trying 192.168.0.2 ...Open

User Access Verification

Username: user
Password:
Switch>en
% No password set.
Switch>
```

☐ Top

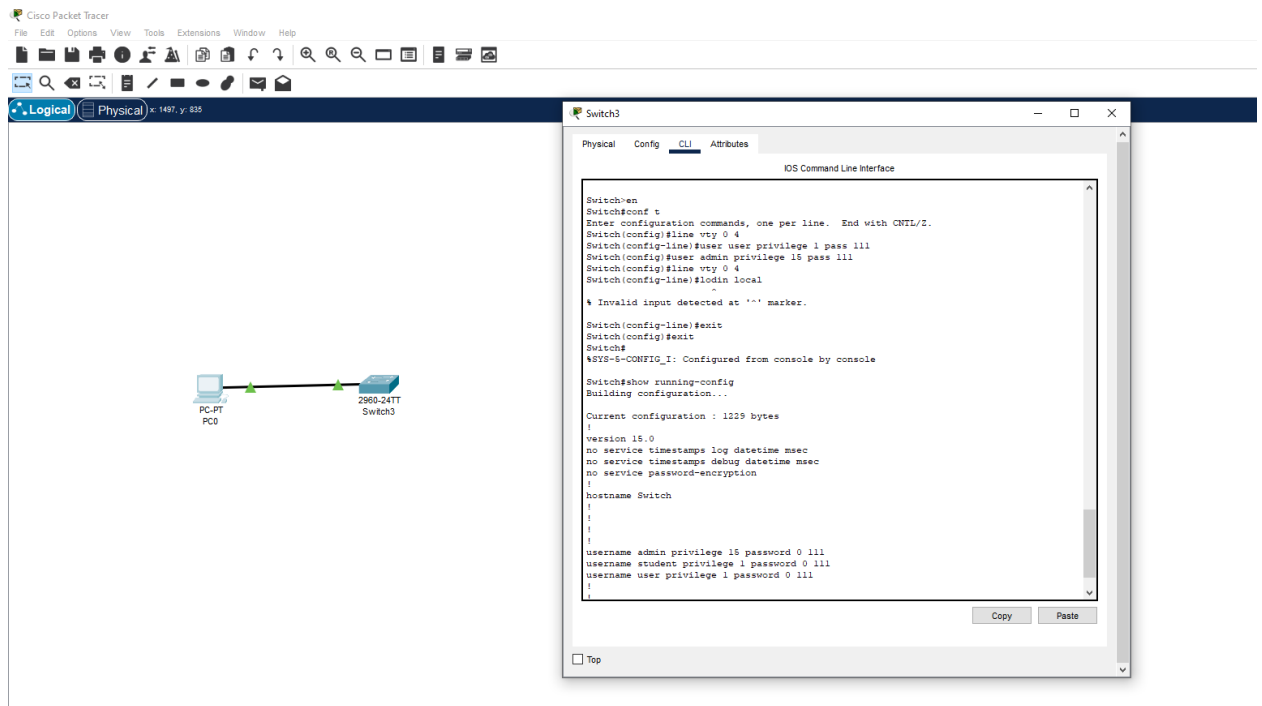

```
Username: user
Password:
Switch>en
% No password set.
Switch>
```