



BridgedT & Decay

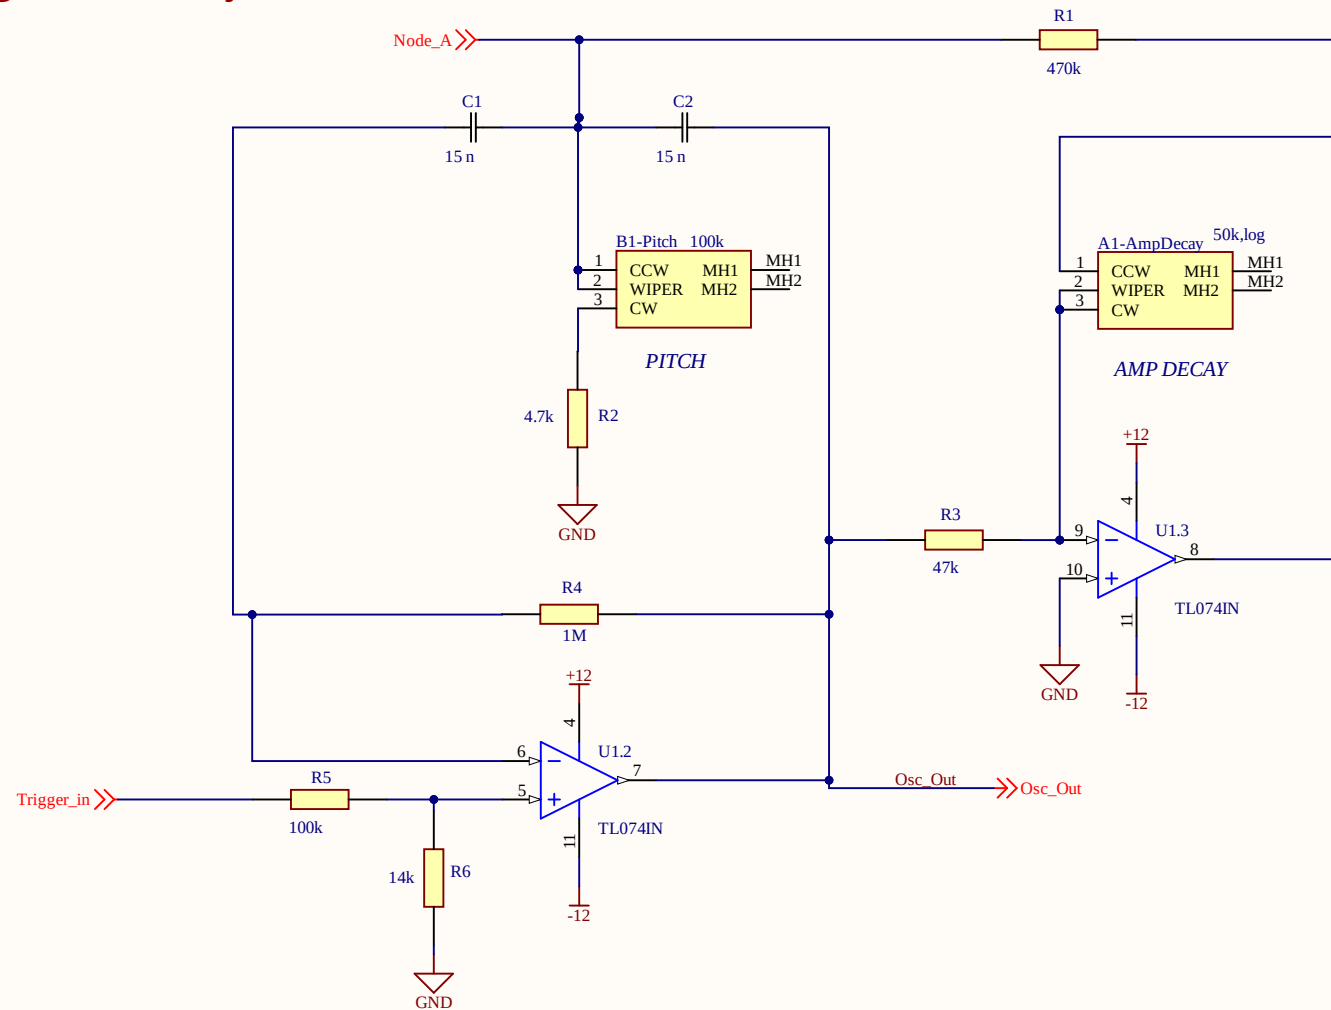





Title		
Size A4	Number BridgedT & Decay	Revision
Date:	6/23/2026	Sheet of
File:	C:\Users\...\BridgedT & Decay.SchDoc	Drawn By:

Gate 2 Trigger & Accent CV

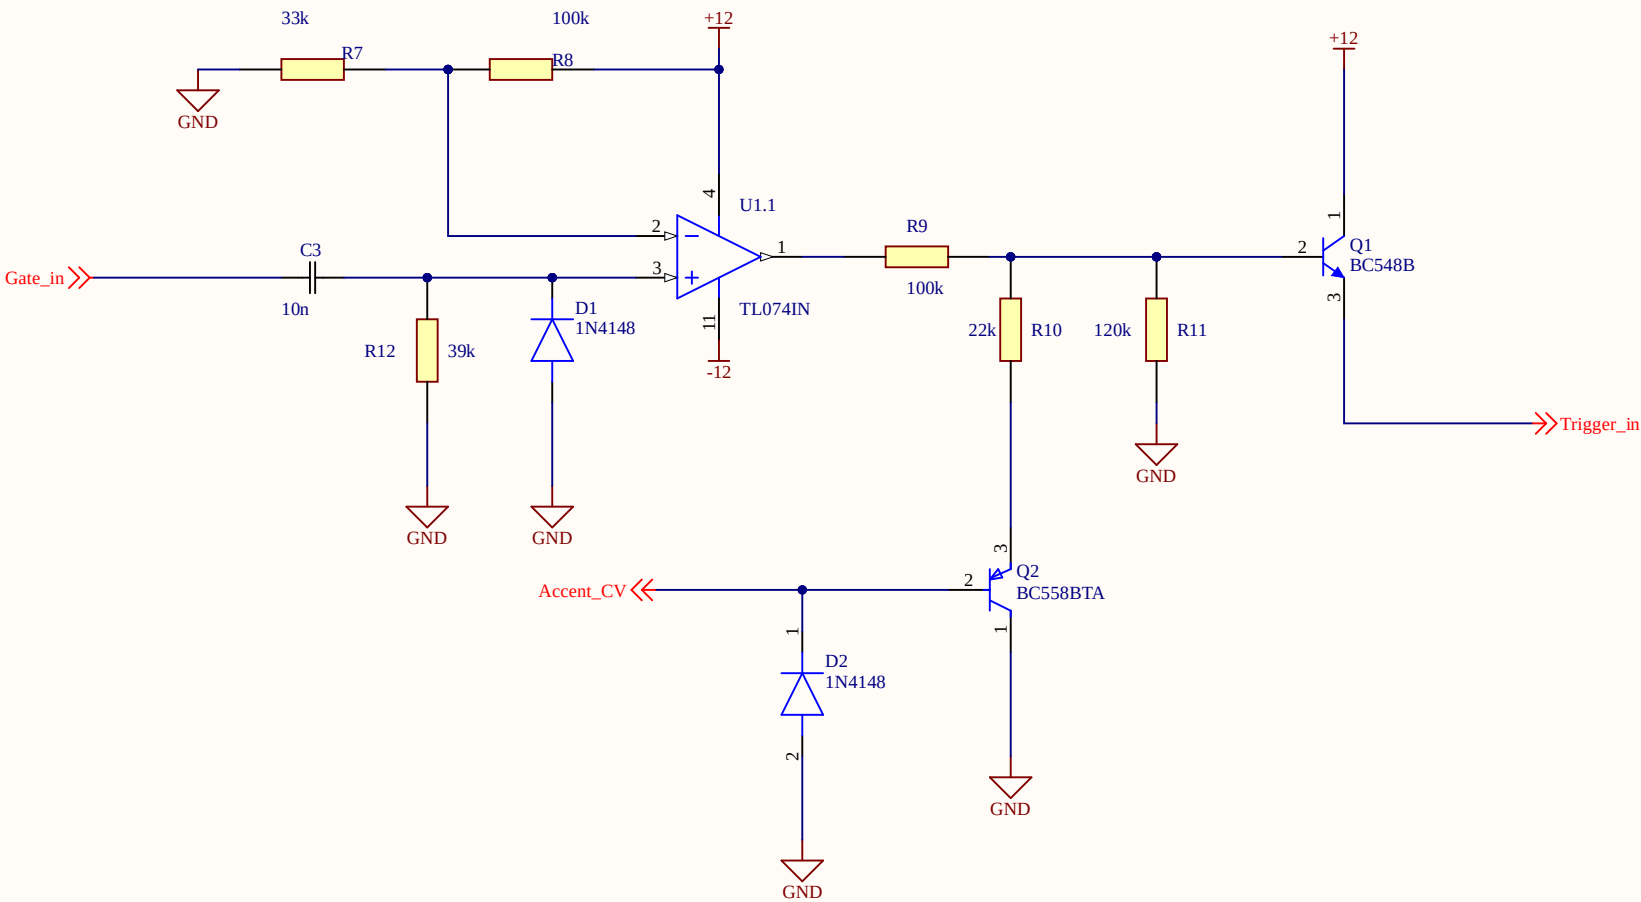


Title			
Gate 2 Trigger & Accent CV			
Size	Number	Revision	
A		1	
Date:	6/23/2026	Sheet of	
File:	C:\Users\...\Gate 2 Trigger & Accent CV.Sch	Drawn By:	Leonardo Donvito

IO

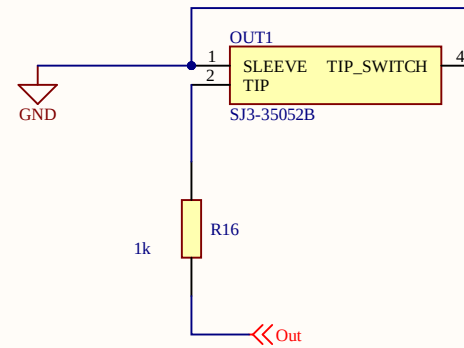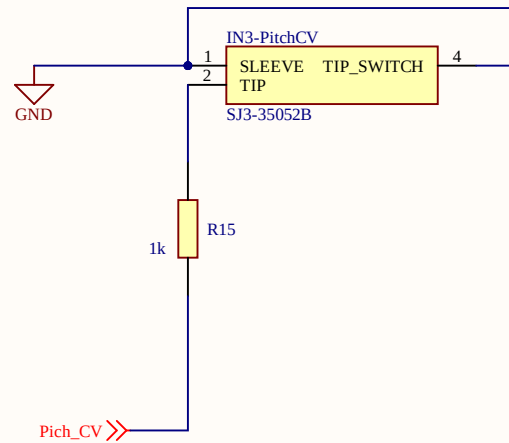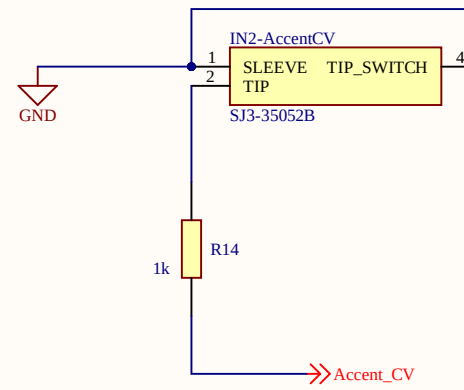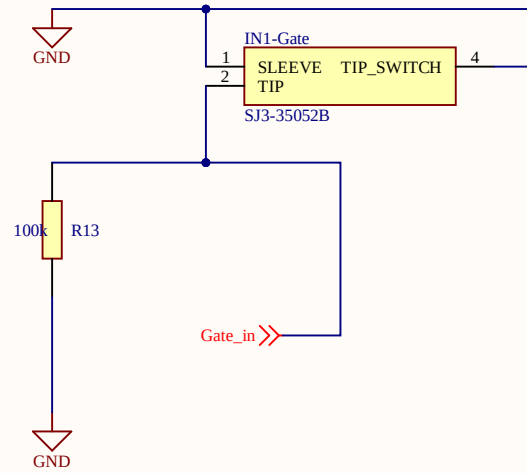


Title			IO
Size	Number	Revision	
A4			
Date:	6/23/2026	Sheet of	
File:	C:\Users\...\IO.SchDoc	Drawn By:	

LPF_Distortion

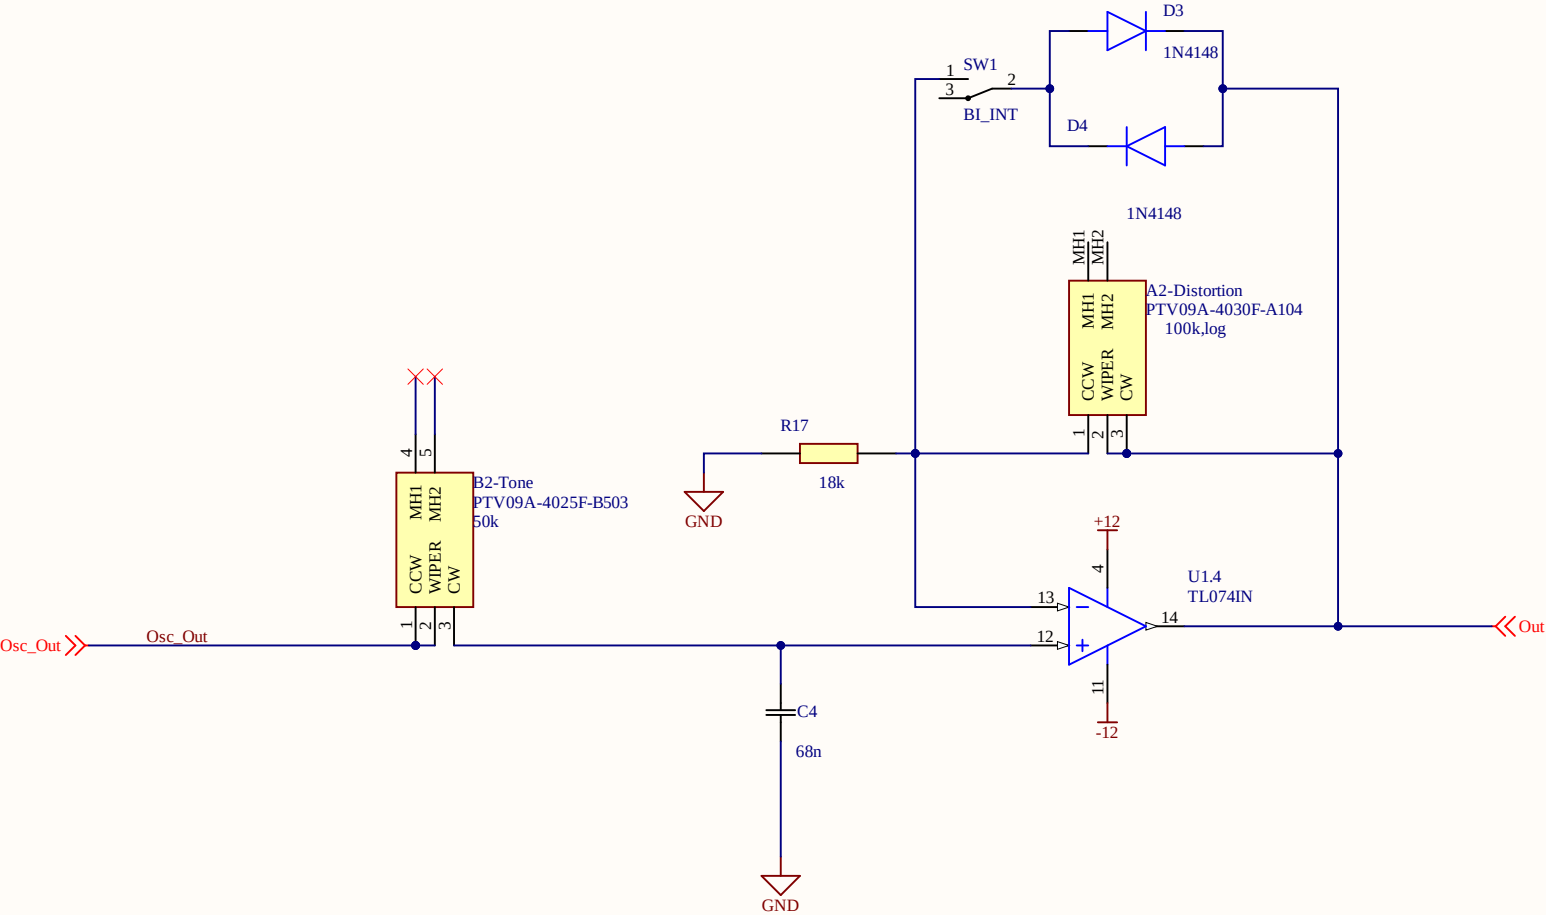


Title		
LPF & Distortion		
Size	Number	Revision
A4		
Date:	6/23/2026	Sheet of
File:	C:\Users\...\LPF & Distortion.SchDoc	Drawn By:

Pitch CV tune depth

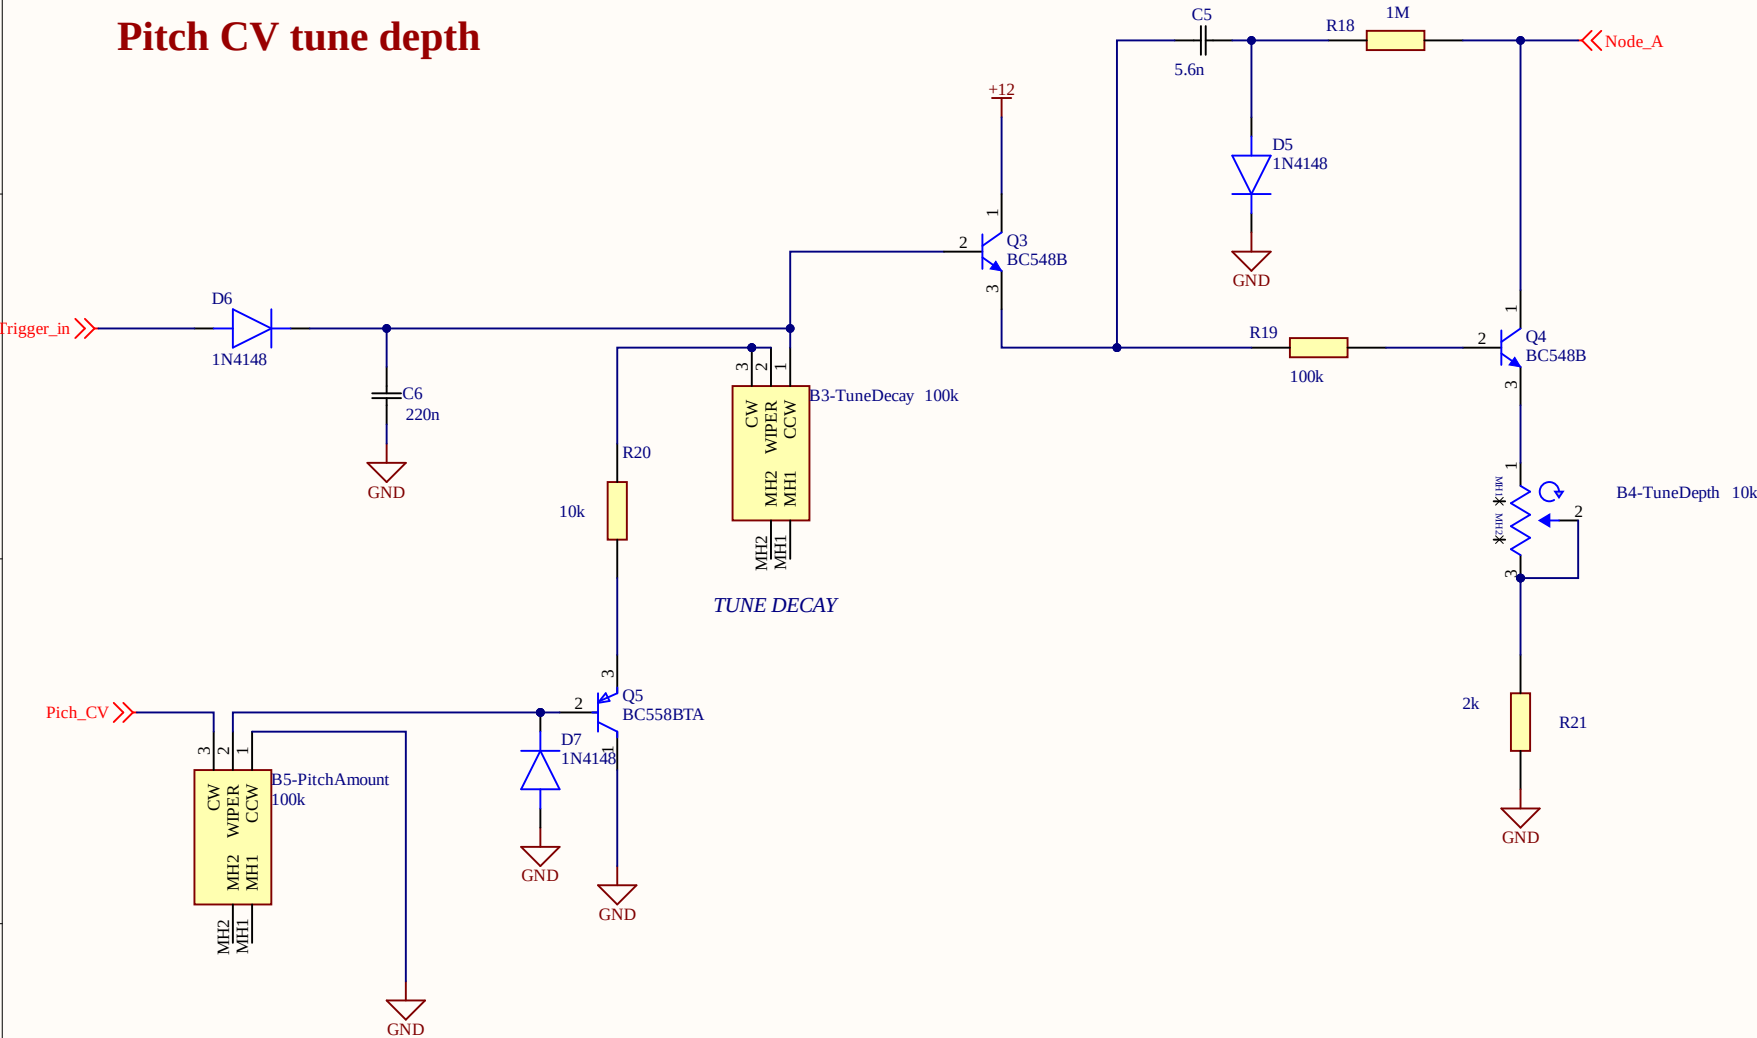


Title		
Pitch CV & Tune Depth		
Size	Number	Revision
A4		
Date:	6/23/2026	Sheet of
File:	C:\Users\...\Pitch CV & Tune Depth.SchDocDrawn By:	

Power

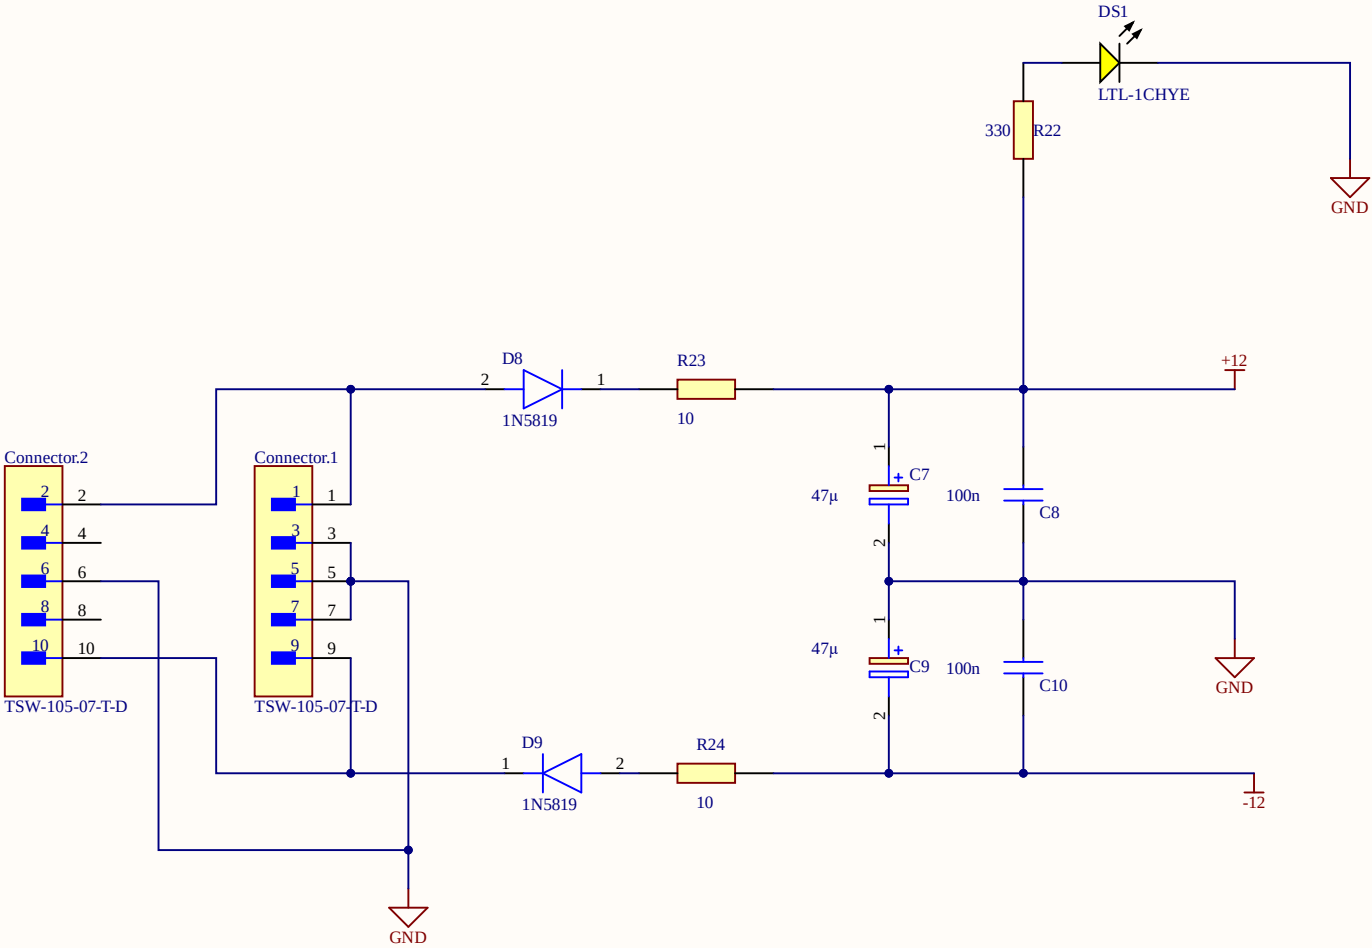

Title		
Power Management		
Size	Number	Revision
A4		
Date:	6/23/2026	Sheet of
File:	C:\Users\...\Power.SchDoc	Drawn By:

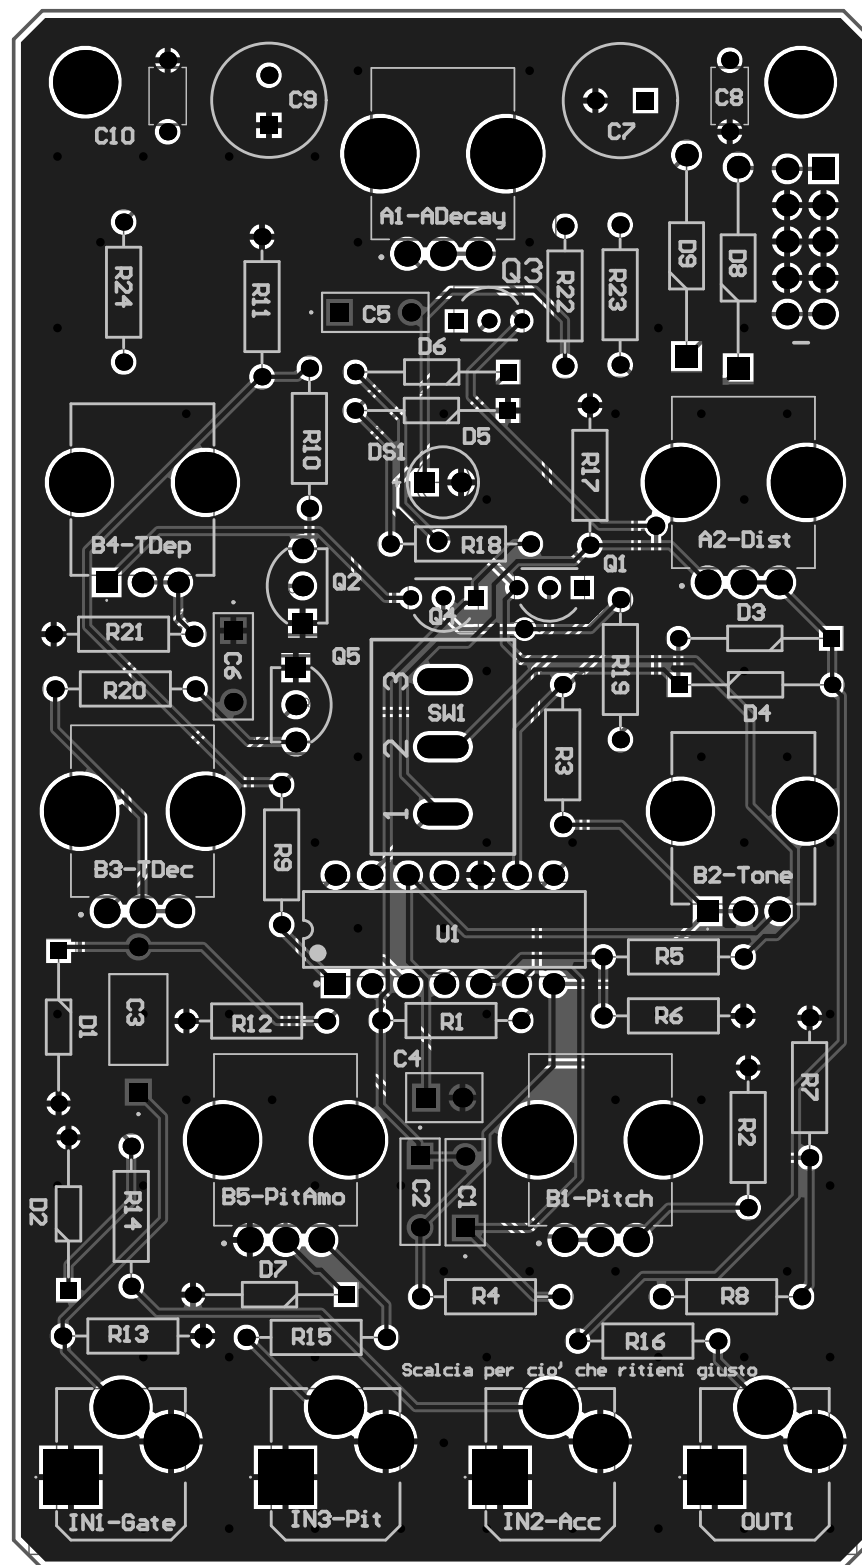

BOB KICK DRUM

DECAY

TUNE

DEPTH



DECAY



EFFECTS

DISTORTION



TOPE



ON



OFF

AMOUNT




PITCH



PITCH

ACCENT



INPUT

OUTPUT

POLIKICK

Value	Part number	Line #	Description	Designator	Quantity
50k,log, 100k	PTV09A-4025F-B104		Variable Resistor	A1-AmpDecay, B1-Pitch	2
100k,log, 100k	PTV09A-4025F-B104	2	Variable Resistor	A2-Distortion, B3-TuneDecay, B5-PitchAmount	3
50k	PTV09A-4025F-B103	19	Variable Resistor	B2-Tone	1
10k	PTV09A-4025F-B103		10k Ohm 1 Gang Linear Through Hole	B4-TuneDepth	1
15 n	MMK5153K50J01L4BULK	3	Condensatori a film 50volts 0.015uF 10%LS5mm	C1, C2	2
10n	C430C106K3F5TA7200		10nF ceramic capacitor	C3	1
68n	C320C683J5R5TA		68 nF ceramic Capacitor	C4	1
5.6n	MMK5332K50J01L4BULK		3.3 nF ceramic capacitor-	C5	1
220n	MMK5224J50J01L4BULK		220 nF film capacitor	C6	1
47μ	ESH476M050AG3KA	8	Suited for high quality	C7, C9	2
100n	K104K15X7RF5TH5	9	Vishay K104K15X7RF5TH5 100nF Multilayer Ceramic Capacitor MLCC 50V dc +/-10% Tolerance Through Hole	C8, C10	2
	TSW-105-07-T-D	13	TSW-105-07-T-D Conn Unshrouded Header HDR10 POS2.54mm Solder ST Thru-Hole Automotive Bulk	Connector	1
	1N4148		Small Signal Diode	D1, D2, D3, D4, D5, D6, D7	7
	1N5819	11	Schottky barrier diode, 1N5819 1A 40V STMicroelectronics 1N5819	D8, D9	2
	LTL-1CHYE	12	Through Hole Lamp, 2.1 V, -55 to 100 degC, 2-Pin THD, RoHS, Bulk	DS1	1
	SJ3-35052B	1	3.5 mm Stereo Jack	IN1-Gate, IN2-AccentCV, IN3-PitchCV, OUT1	4
	BC548B		Bulk Through Hole NPN Single Bipolar (BJT) Transistor 200 @2mA 5V 100mA 500mW 300MHz	Q1, Q3, Q4	3
	BC558BTA		BC558BTA Small Signal Bipolar Transistor, 0.1A I(C), 30V V(BR)CEO, 1-Element, PNP, Silicon, TO-92	Q2, Q5	2
470k, 4.7k, 47k, 1M, 100k, 14k, 33k, 22k, 120k, 39k, 1k, 18k, 10k, 2k, 330, 10	MFR-25FTF52-600K	17	Metal Film Resistors - Through Hole	R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, R18, R19, R20, R21, R22, R23, R24	24
	BI_INT		Toggle Switches BUSHING MOUNT MINIATURE TOGGLE	SW1	1
	TL074IN	21	Quad Low-Noise JFET-Input General-Purpose Operational Amplifier, 7 to 36 V, -40 to 85 degC, 14-pin DIP (N14), Pb-Free (RoHS)	U1	1