


LED Beacon

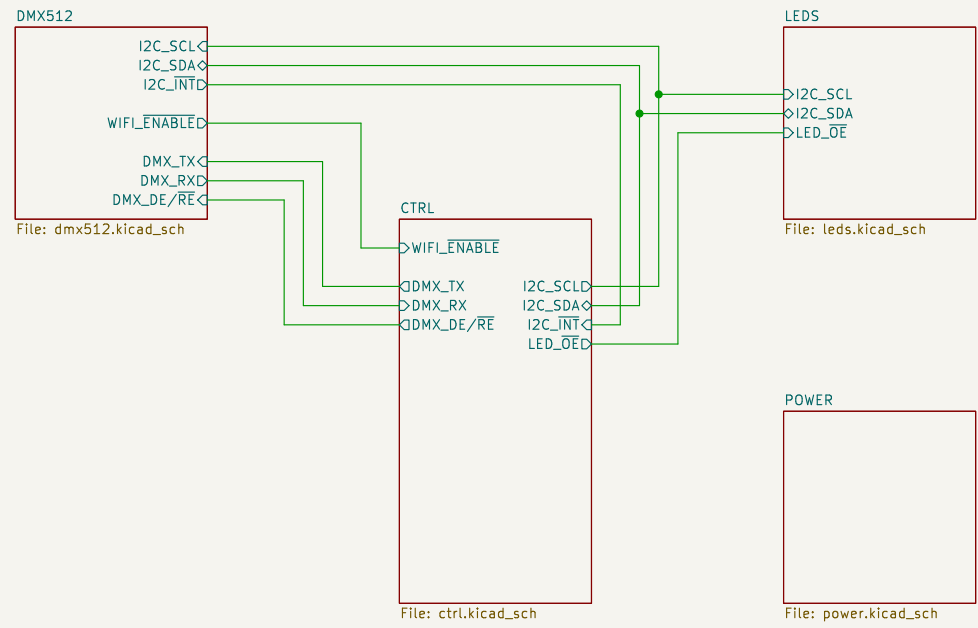

- H1 MountingHole
- H2 MountingHole
- H3 MountingHole
- H4 MountingHole

Wires & Bits		
Sheet: /		
File: emf_beacon.kicad_sch		
Title:		
Size: A4	Date: 2026-04-10	Rev: 0
KiCad E.D.A. 9.0.9		Id: 1/5

Controller

USB Programming

VCC Monitoring

Temperature Monitoring

Auto reset

Status LED



Does this need to be a switch?
Cheaper switch?
Side actuation?

Wires & Bits

Sheet: /CTRL/
File: ctrl.kicad_sch

Title:

Size: A4 Date: 2026-04-10 Rev: 0
KiCad E.D.A. 9.0.9 Id: 2/5

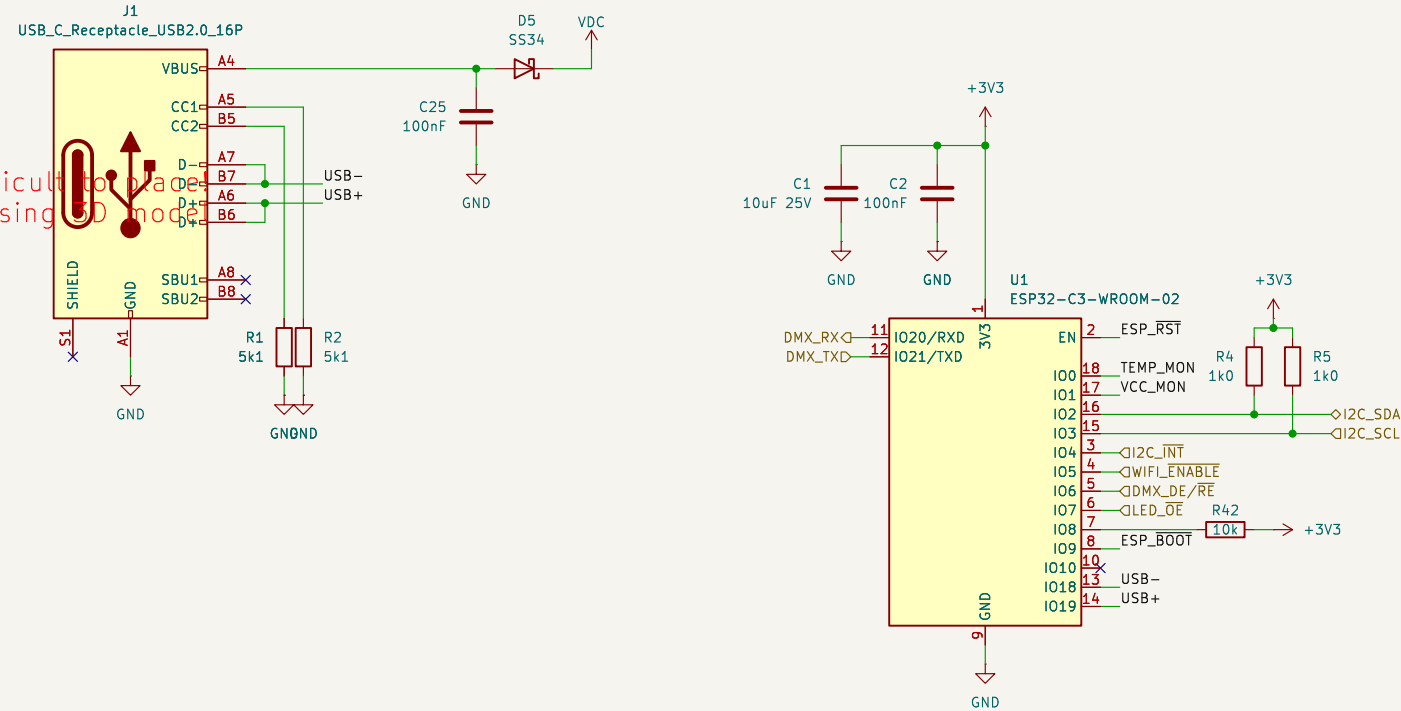

Auto reset

Short press resets the ESP32
Long press resets the ESP32 and puts it in bootloader mode

Auto reset

Short press resets the ESP32
Long press resets the ESP32 and puts it in bootloader mode

Auto reset


Short press resets the ESP32
Long press resets the ESP32 and puts it in bootloader mode

Status LEDs?


Sheet: /CTRL/ File: ctrl.kicad_sch	
Title:	
Size: A4	Date: 2026-04-10
KiCad E.D.A. 9.0.9	Rev: 0 Id: 2/5

DMX512

To XLRs

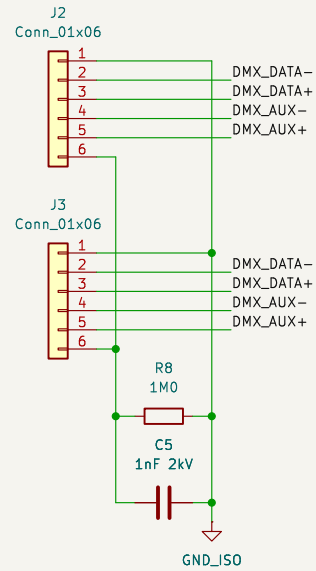


ESD Protection

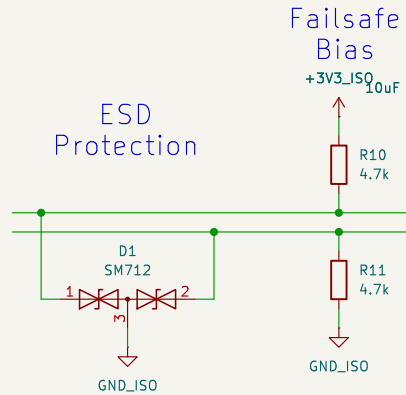


Failsafe Bias

Isolated RS485 TRX

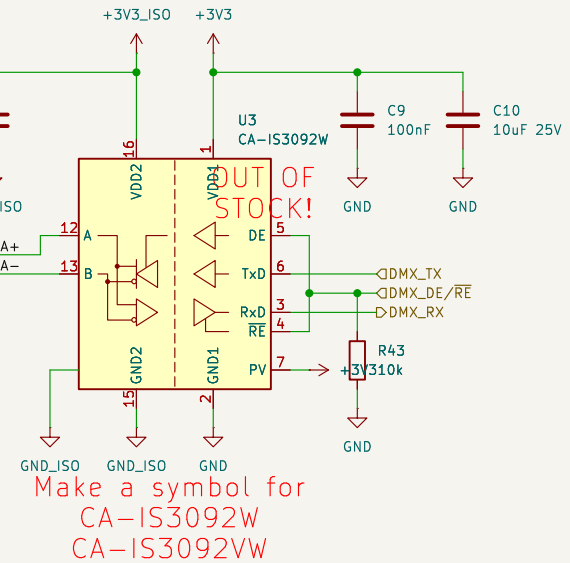

Make a symbol for CA-IS3092W CA-IS3092VW

GPA7 & GPB2:7 for?

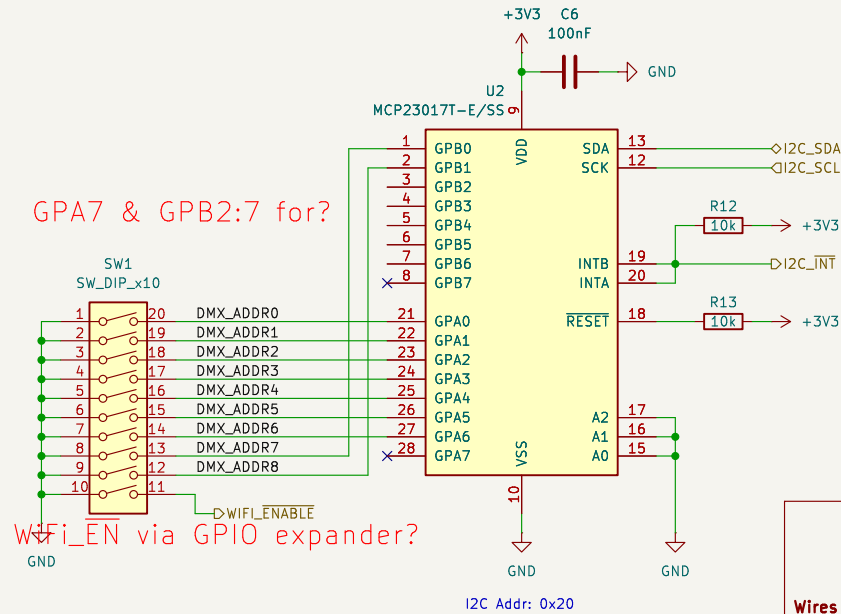

WIFI_EN via GPIO expander?

https://dfimg.drobot.com/wiki/23269/DFR0944_esp32-s3-based-dmx512-smart-lighting-controller_schematics_V1.0.pdf

<https://www.ti.com/lit/an/slla272d/slla272d.pdf>

Wires & Bits

Sheet: /DMX512/
File: dmx512.kicad_sch

Title:


Size: A4
KiCad E.D.A. 9.0.9

Date: 2026-04-10

Rev: 0

Id: 3/5

LED Driver

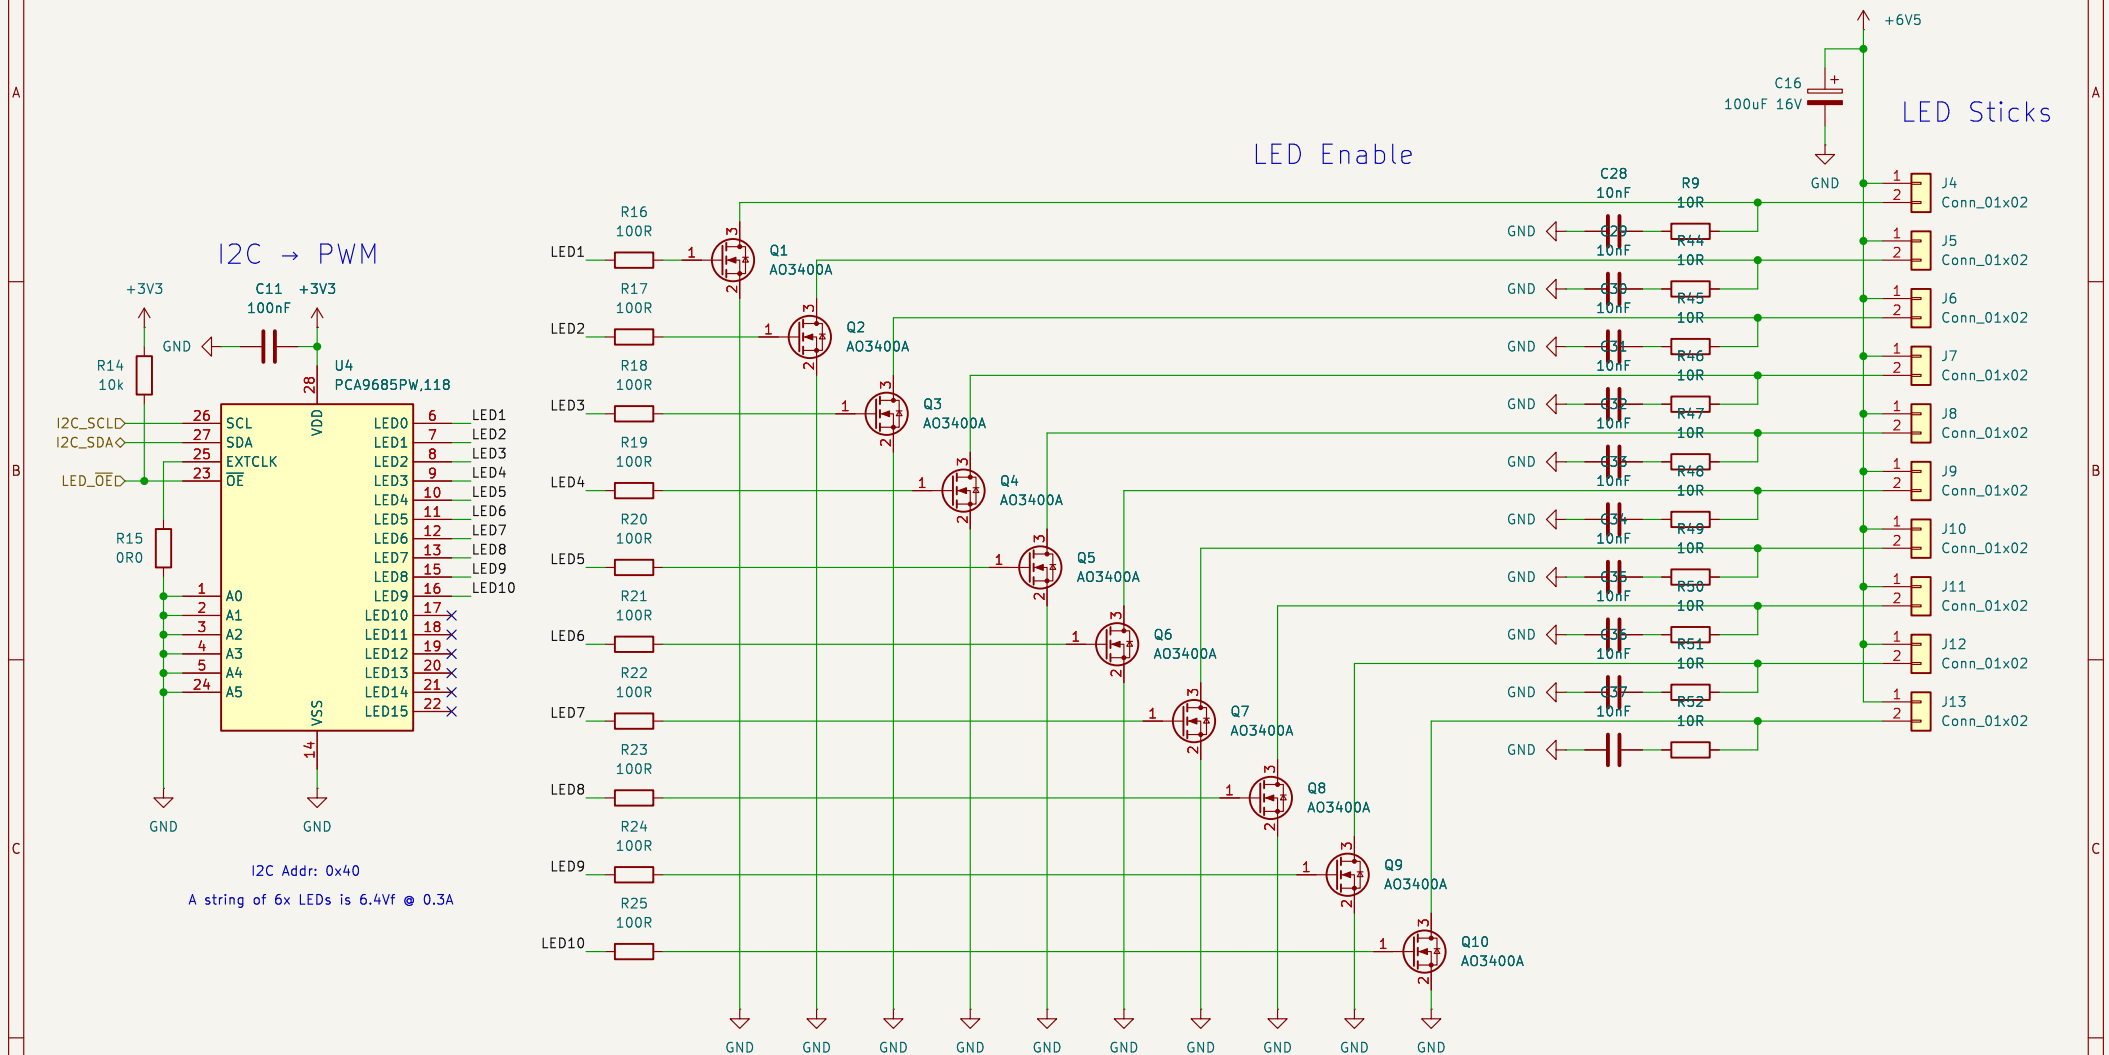

Wires & Bits


Sheet: /LEDS/
File: leds.kicad_sch

Title:

Size: A4	Date: 2026-04-10
KiCad E.D.A. 9.0.9	

Rev: 0
Id: 4/5

Power Supplies

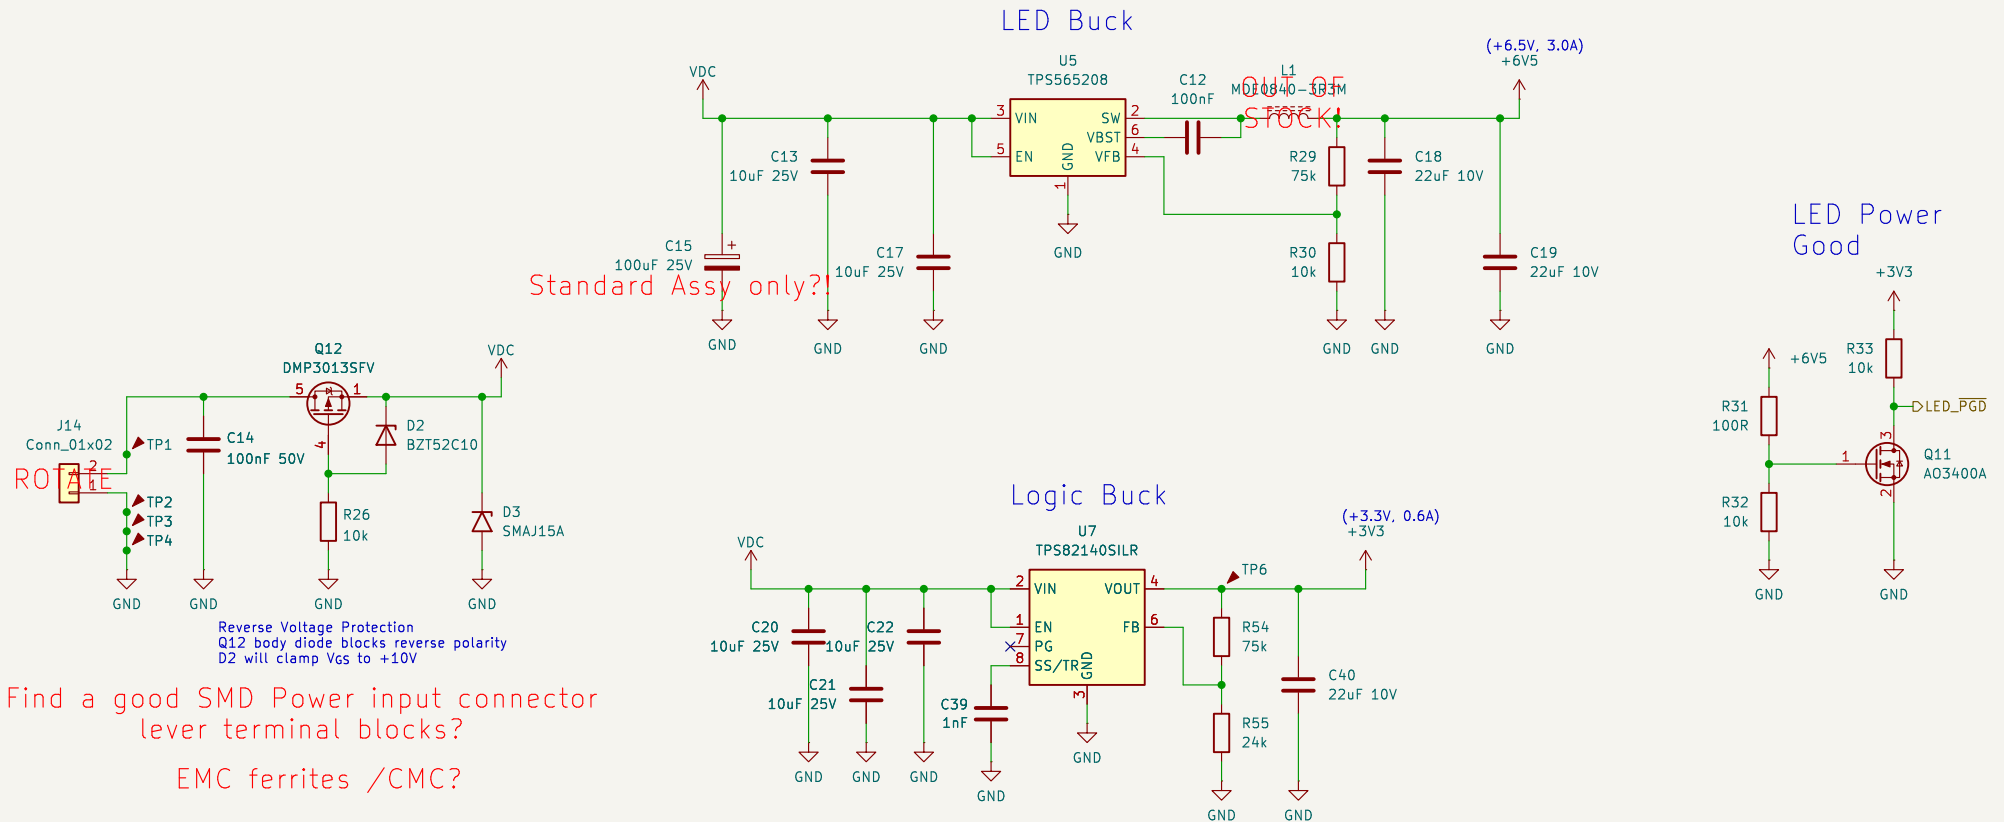

Wires & Bits

Sheet: /POWER/
File: power.kicad_sch

Title:

Size: A4

Date: 2026-04-10

KiCad E.D.A. 9.0.9

Rev: 0

Id: 5/5