
SUPPLY: J1 -> R1 -> D4 -> VCC. R1 is a resistor, not a fuse.

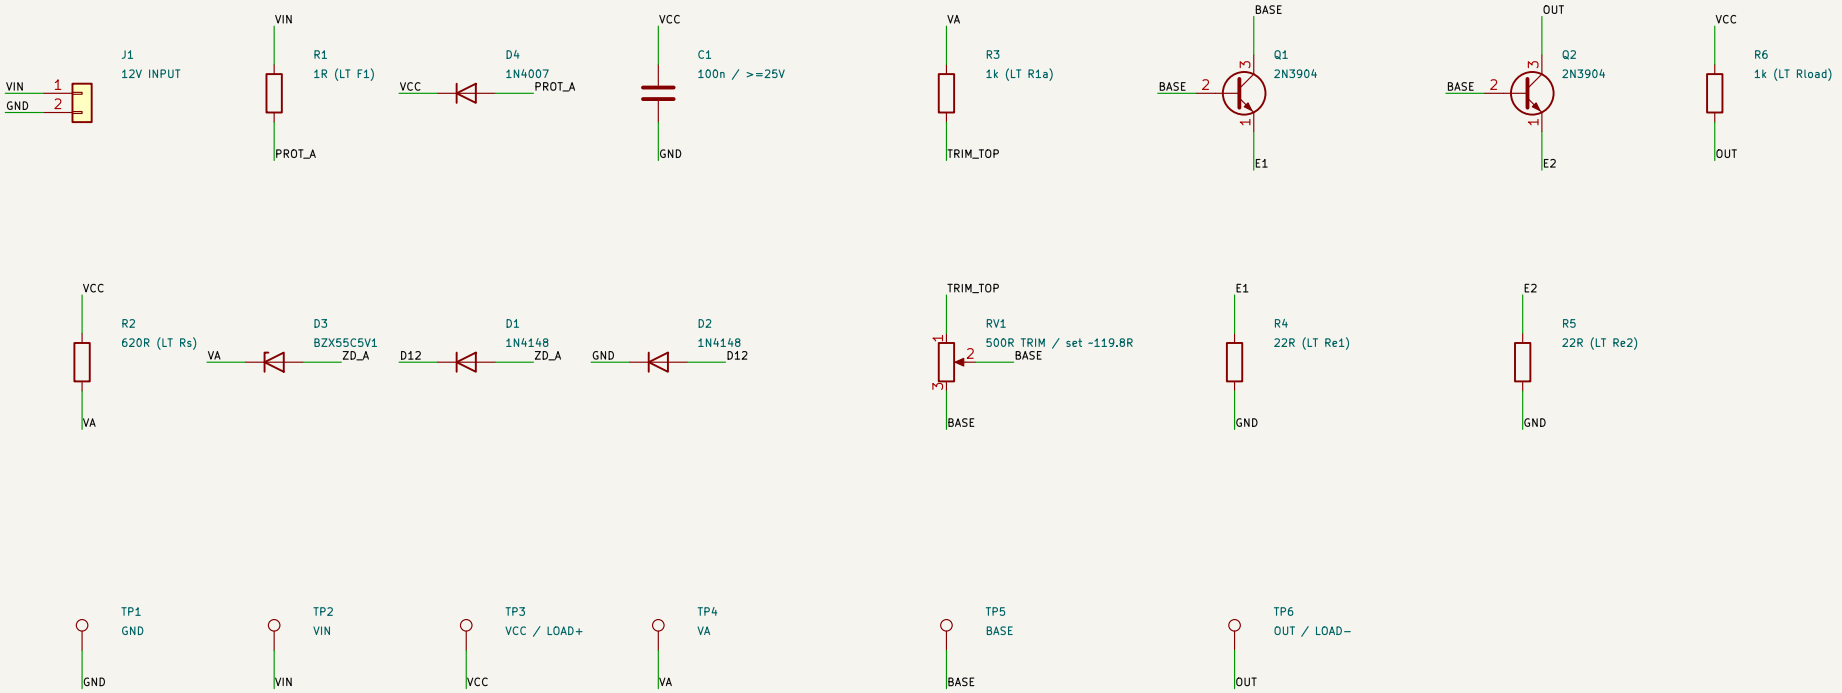

RV1: 500 ohm; ~119.8 ohm nominal setting. Pad 2 + 3 tied; actual wiper identification PENDING.

P1 PROVISIONAL: RV1 measured geometry fitted; verify actual wiper/pin mapping before fabrication.

Measure V(TP3)−V(TP6) across R6: approximately 5 V means approximately 5 mA (nominal 1k load).

LT names: R1=F1, R2=Rs, R3=R1a, R4=Re1, R5=Re2, R6=Rload, D3=Dz.

All resistors 1/4 W. Labels with matching names are electrically connected.

Exact LTspice connectivity; added power connector and voltage test points

Sheet: /
File: current_mirror.kicad_sch

Title: 5 mA diode−compensated current mirror

Size: A4 | Date: | **Rev: P1 − VERIFY RV1 WIPER**

KiCad E.D.A. 10.0.7 | Id: 1/1