
SUPPLY: J1 -> R1 -> D4 -> VCC. R1 is a resistor, not a fuse.

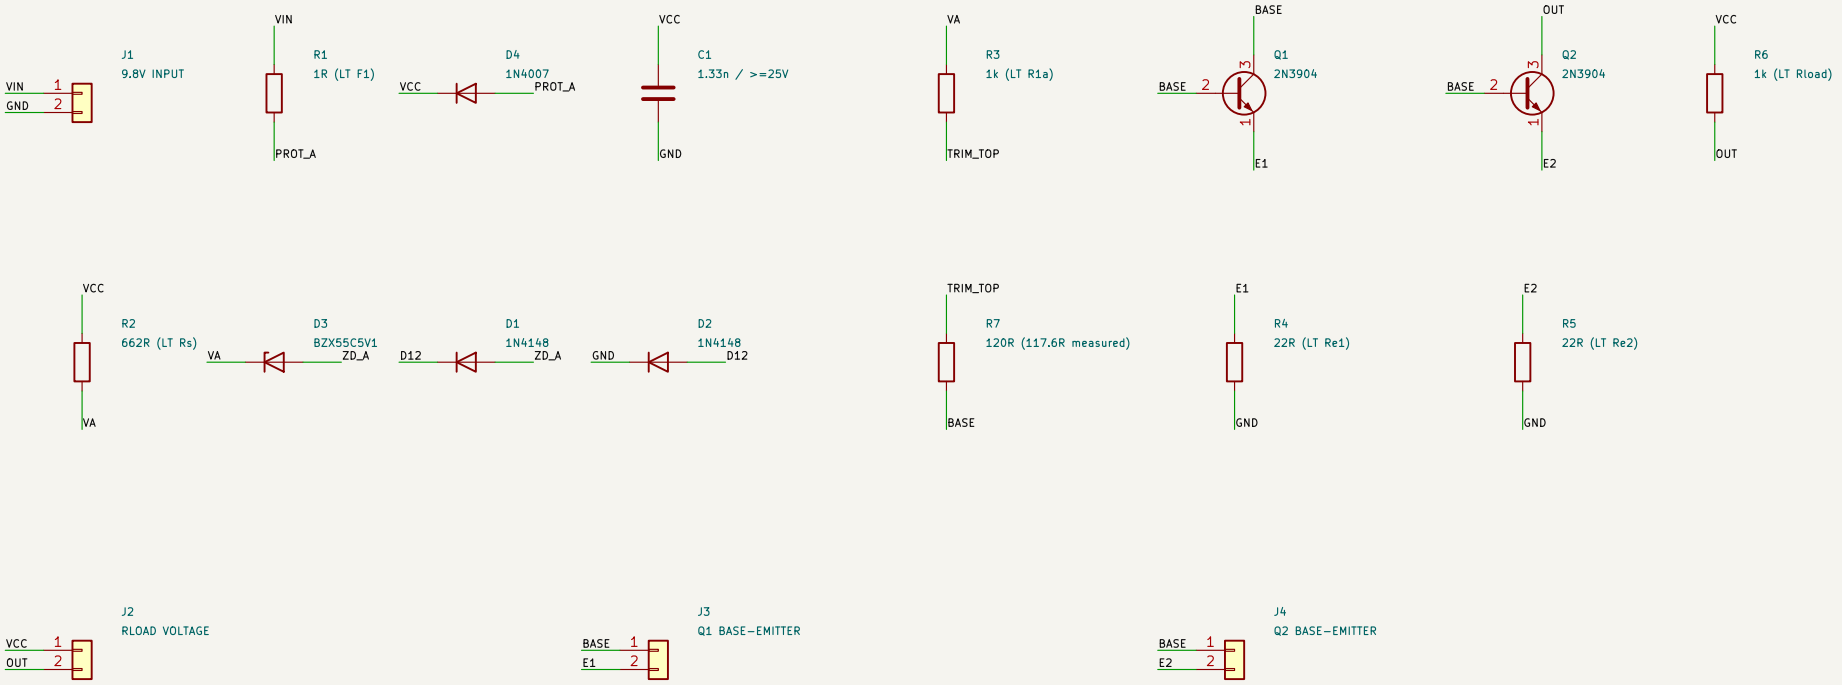


R7=120 ohm nominal fixed resistor; measured 117.6 ohm matches updated LT RV1 parameter.

P4: 9.8V input, Rs=662 ohm, C1=1.33nF. J2/J3/J4 are measurement headers, not jumpers.

DC volts: red pin 1 / black pin 2. J2 across R6; J3 Q1 base–emitter; J4 Q2 base–emitter.

LT names: R1=F1, R2=Rs, R3=R1a, R4=Re1, R5=Re2, R6=Rload, D3=Dz.

All resistors 1/4 W. Labels with matching names are electrically connected.

J1 power; J2 load voltage; J3 Q1 Vbe; J4 Q2 Vbe. Pin 1 positive, pin 2 negative.

Sheet: /
File: current_mirror.kicad_sch

**Title: Diode–compensated current mirror – header unit**

| Size: A4 | Date: | Rev: P5 – SOLDER CLEARANC |
|---|---|---|
| KiCad E.D.A. 10.0.7 | | Id: 1/1 |