
SUPPLY: J1 -> R1 -> D4 -> VCC. R1 is a resistor, not a fuse.

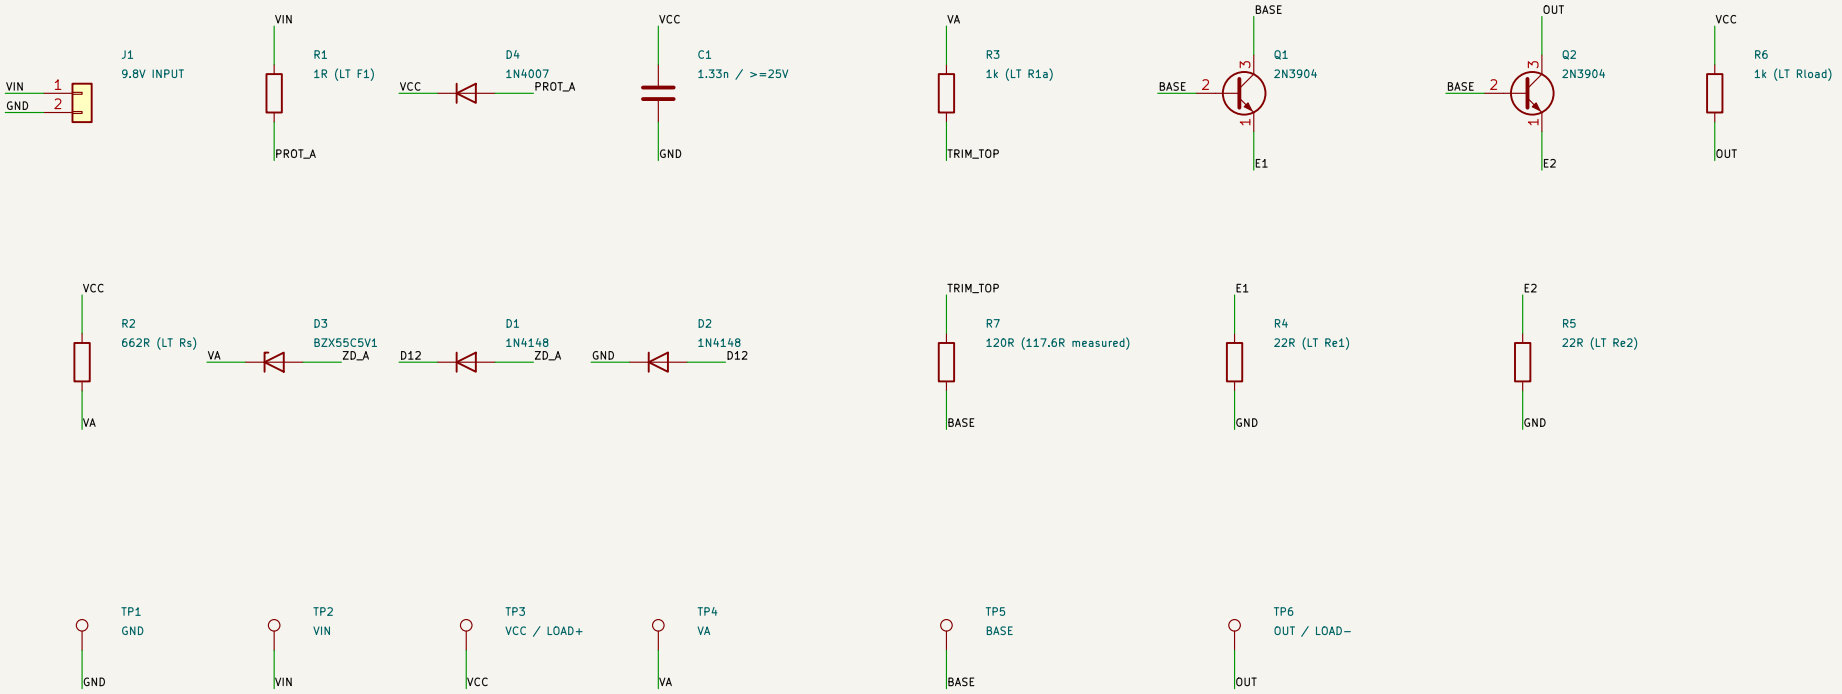

R7=120 ohm nominal fixed resistor; measured 117.6 ohm matches updated LT RV1 parameter.

P3: 9.8V input, Rs=662 ohm, C1=1.33nF. No trimmer; same routing and footprints.

Measure V(TP3)−V(TP6) across R6: approximately 5 V means approximately 5 mA (nominal 1k load).

LT names: R1=F1, R2=Rs, R3=R1a, R4=Re1, R5=Re2, R6=Rload, D3=Dz.

All resistors 1/4 W. Labels with matching names are electrically connected.

9.8V input; Rs=662R; C1=1.33nF; fixed R7=120R nominal, 117.6R measured

Sheet: /
File: current_mirror.kicad_sch

Title: Diode−compensated current mirror

Size: A4 | Date: | **Rev: P3 − SOURCE VALUES S**

KiCad E.D.A. 10.0.7 | Id: 1/1