Exercícios do Packet Tracer

Exercício 1

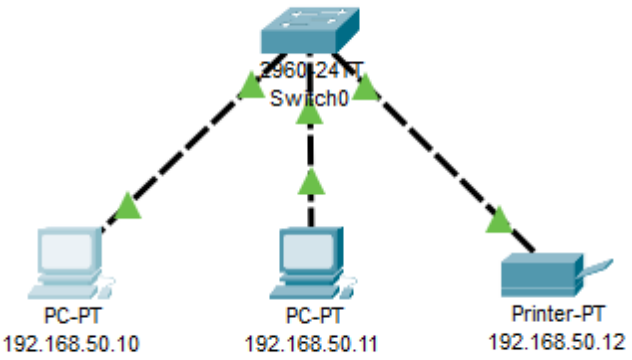

192.168.50.10

Physical | Config | Desktop | Programming | Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\> ping 192.168.50.11

Pinging 192.168.50.11 with 32 bytes of data:

Reply from 192.168.50.11: bytes=32 time<1ms TTL=128
Reply from 192.168.50.11: bytes=32 time<1ms TTL=128
Reply from 192.168.50.11: bytes=32 time<1ms TTL=128
Reply from 192.168.50.11: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.50.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.50.12

Pinging 192.168.50.12 with 32 bytes of data:

Reply from 192.168.50.12: bytes=32 time<1ms TTL=128
Reply from 192.168.50.12: bytes=32 time<1ms TTL=128
Reply from 192.168.50.12: bytes=32 time<1ms TTL=128
Reply from 192.168.50.12: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.50.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Top

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	192.168....	192.168.50.11	ICMP		0.000	N	0	(edit)	
	Successful	192.168....	192.168.50.12	ICMP		0.000	N	1	(edit)	
	Successful	192.168....	192.168.50.10	ICMP		0.000	N	2	(edit)	
	Successful	192.168....	192.168.50.12	ICMP		0.000	N	3	(edit)	

Exercício 2

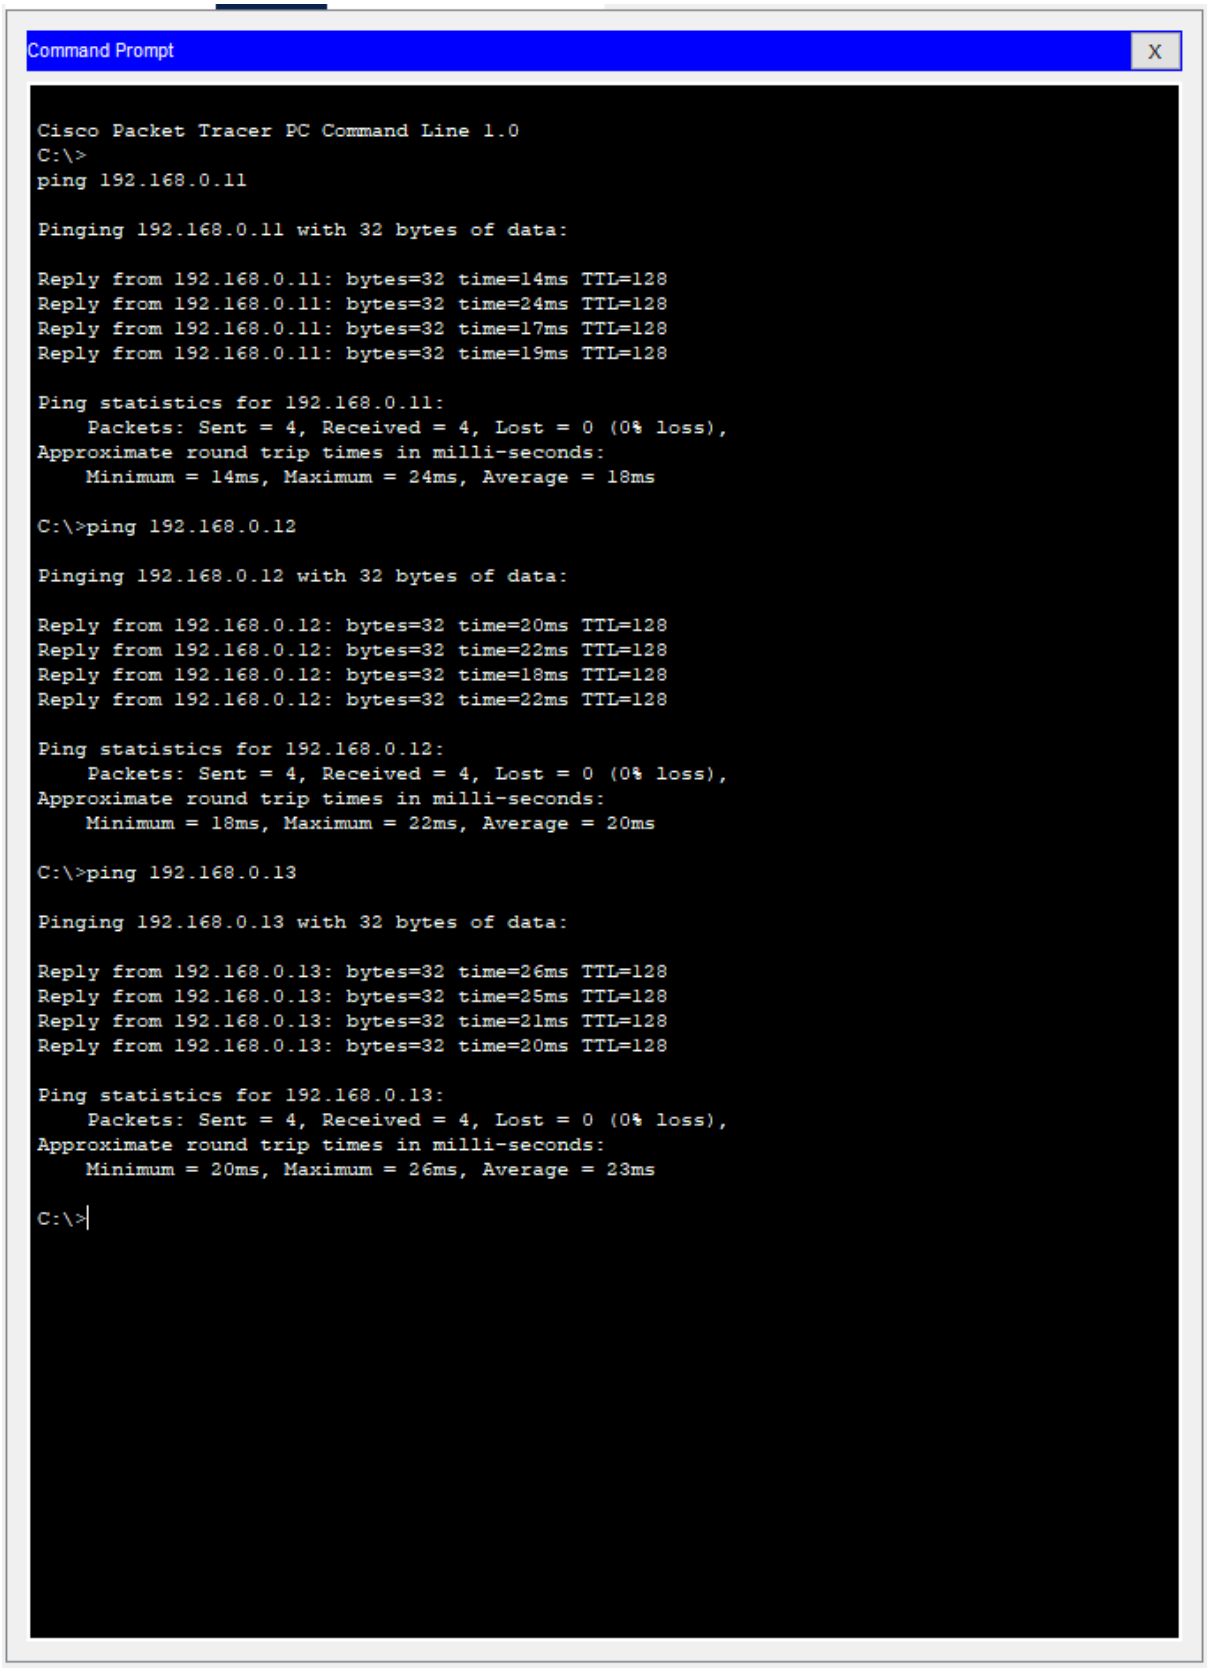
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>
ping 192.168.0.11
Pinging 192.168.0.11 with 32 bytes of data:
Reply from 192.168.0.11: bytes=32 time=14ms TTL=128
Reply from 192.168.0.11: bytes=32 time=24ms TTL=128
Reply from 192.168.0.11: bytes=32 time=17ms TTL=128
Reply from 192.168.0.11: bytes=32 time=19ms TTL=128
Ping statistics for 192.168.0.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 14ms, Maximum = 24ms, Average = 18ms
C:\>ping 192.168.0.12
Pinging 192.168.0.12 with 32 bytes of data:
Reply from 192.168.0.12: bytes=32 time=20ms TTL=128
Reply from 192.168.0.12: bytes=32 time=22ms TTL=128
Reply from 192.168.0.12: bytes=32 time=18ms TTL=128
Reply from 192.168.0.12: bytes=32 time=22ms TTL=128
Ping statistics for 192.168.0.12:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 18ms, Maximum = 22ms, Average = 20ms
C:\>ping 192.168.0.13
Pinging 192.168.0.13 with 32 bytes of data:
Reply from 192.168.0.13: bytes=32 time=26ms TTL=128
Reply from 192.168.0.13: bytes=32 time=25ms TTL=128
Reply from 192.168.0.13: bytes=32 time=21ms TTL=128
Reply from 192.168.0.13: bytes=32 time=20ms TTL=128
Ping statistics for 192.168.0.13:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 20ms, Maximum = 26ms, Average = 23ms
C:\>

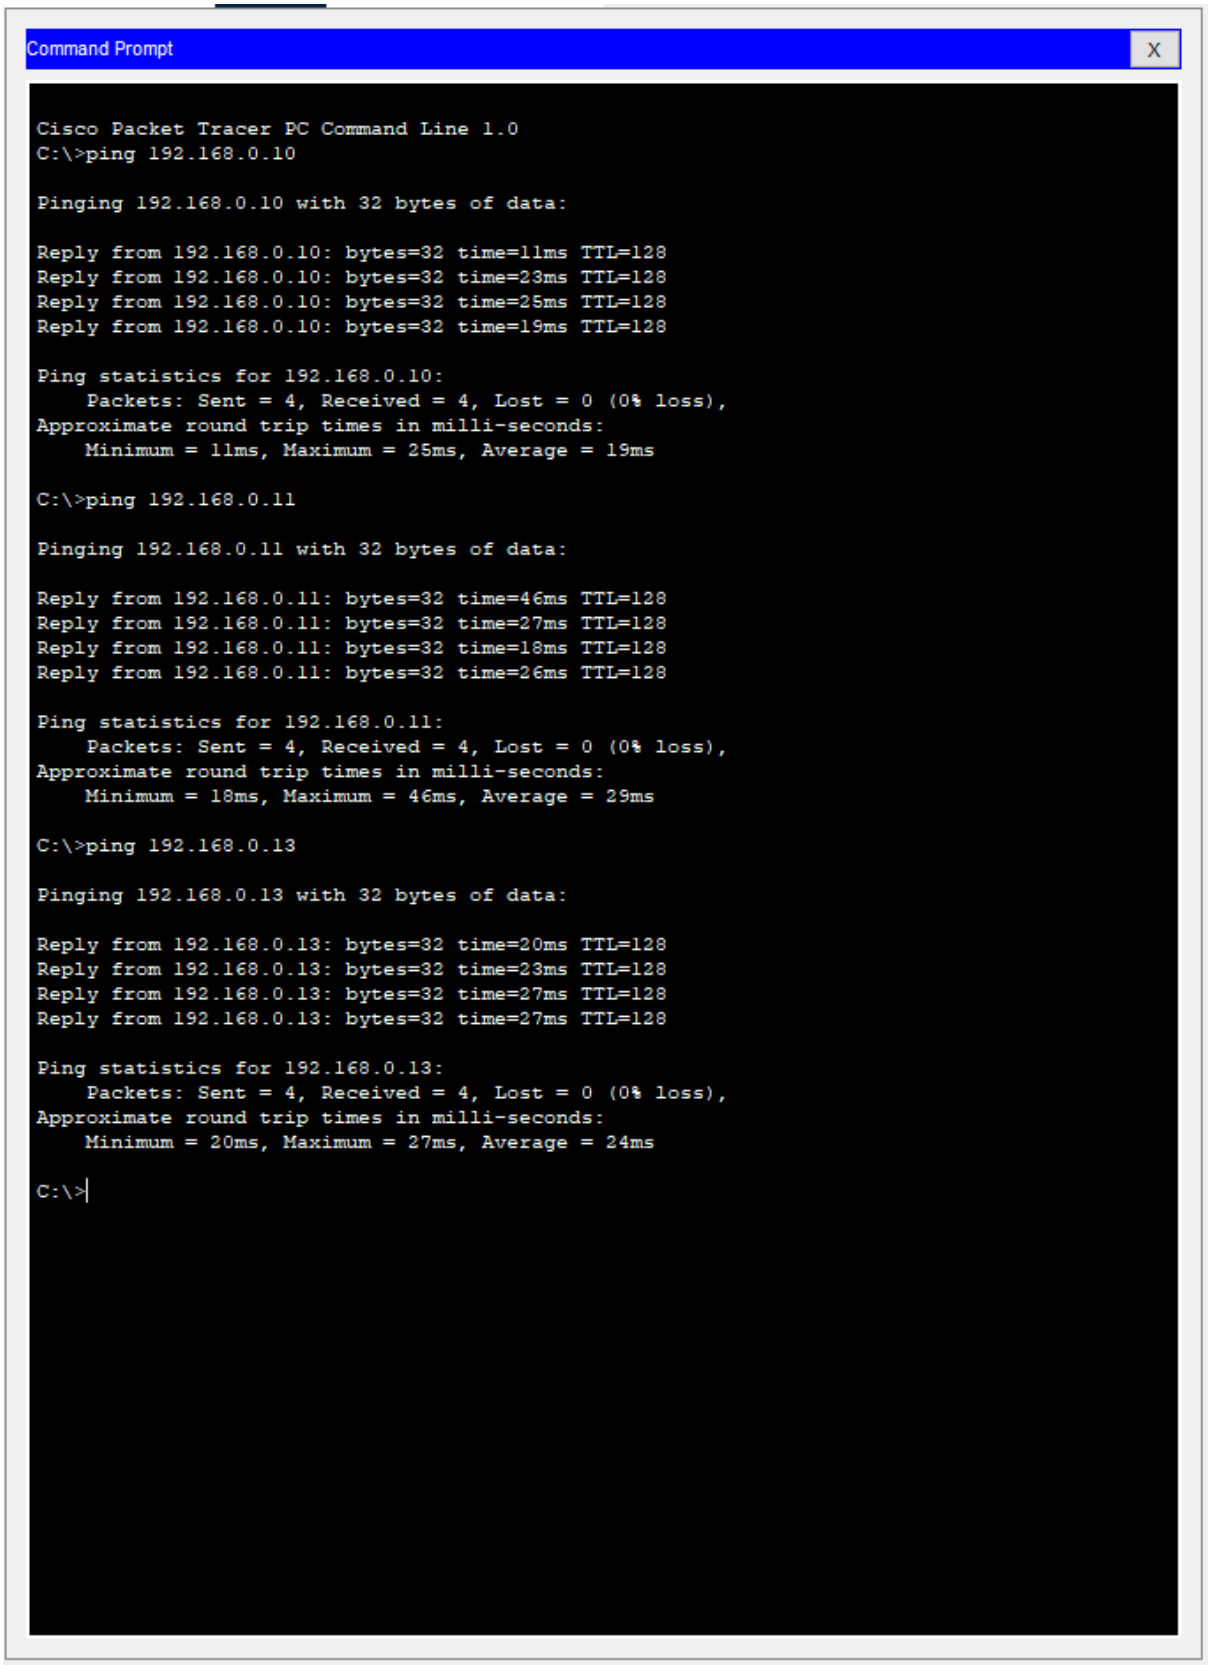
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.10
Pinging 192.168.0.10 with 32 bytes of data:
Reply from 192.168.0.10: bytes=32 time=11ms TTL=128
Reply from 192.168.0.10: bytes=32 time=23ms TTL=128
Reply from 192.168.0.10: bytes=32 time=25ms TTL=128
Reply from 192.168.0.10: bytes=32 time=19ms TTL=128
Ping statistics for 192.168.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 11ms, Maximum = 25ms, Average = 19ms
C:\>ping 192.168.0.11
Pinging 192.168.0.11 with 32 bytes of data:
Reply from 192.168.0.11: bytes=32 time=46ms TTL=128
Reply from 192.168.0.11: bytes=32 time=27ms TTL=128
Reply from 192.168.0.11: bytes=32 time=18ms TTL=128
Reply from 192.168.0.11: bytes=32 time=26ms TTL=128
Ping statistics for 192.168.0.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 18ms, Maximum = 46ms, Average = 29ms
C:\>ping 192.168.0.13
Pinging 192.168.0.13 with 32 bytes of data:
Reply from 192.168.0.13: bytes=32 time=20ms TTL=128
Reply from 192.168.0.13: bytes=32 time=23ms TTL=128
Reply from 192.168.0.13: bytes=32 time=27ms TTL=128
Reply from 192.168.0.13: bytes=32 time=27ms TTL=128
Ping statistics for 192.168.0.13:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 20ms, Maximum = 27ms, Average = 24ms
C:\>

```
C:\>cls
Invalid Command.

C:\>ping 192.168.0.10

Pinging 192.168.0.10 with 32 bytes of data:

Reply from 192.168.0.10: bytes=32 time=28ms TTL=128
Reply from 192.168.0.10: bytes=32 time=16ms TTL=128
Reply from 192.168.0.10: bytes=32 time=25ms TTL=128
Reply from 192.168.0.10: bytes=32 time=27ms TTL=128

Ping statistics for 192.168.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 16ms, Maximum = 28ms, Average = 24ms

C:\>ping 192.168.0.12

Pinging 192.168.0.12 with 32 bytes of data:

Reply from 192.168.0.12: bytes=32 time=15ms TTL=128
Reply from 192.168.0.12: bytes=32 time=28ms TTL=128
Reply from 192.168.0.12: bytes=32 time=22ms TTL=128
Reply from 192.168.0.12: bytes=32 time=24ms TTL=128

Ping statistics for 192.168.0.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 15ms, Maximum = 28ms, Average = 22ms

C:\>ping 192.168.0.13

Pinging 192.168.0.13 with 32 bytes of data:

Reply from 192.168.0.13: bytes=32 time=37ms TTL=128
Reply from 192.168.0.13: bytes=32 time=21ms TTL=128
Reply from 192.168.0.13: bytes=32 time=23ms TTL=128
Reply from 192.168.0.13: bytes=32 time=22ms TTL=128

Ping statistics for 192.168.0.13:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 21ms, Maximum = 37ms, Average = 25ms

C:\>
```

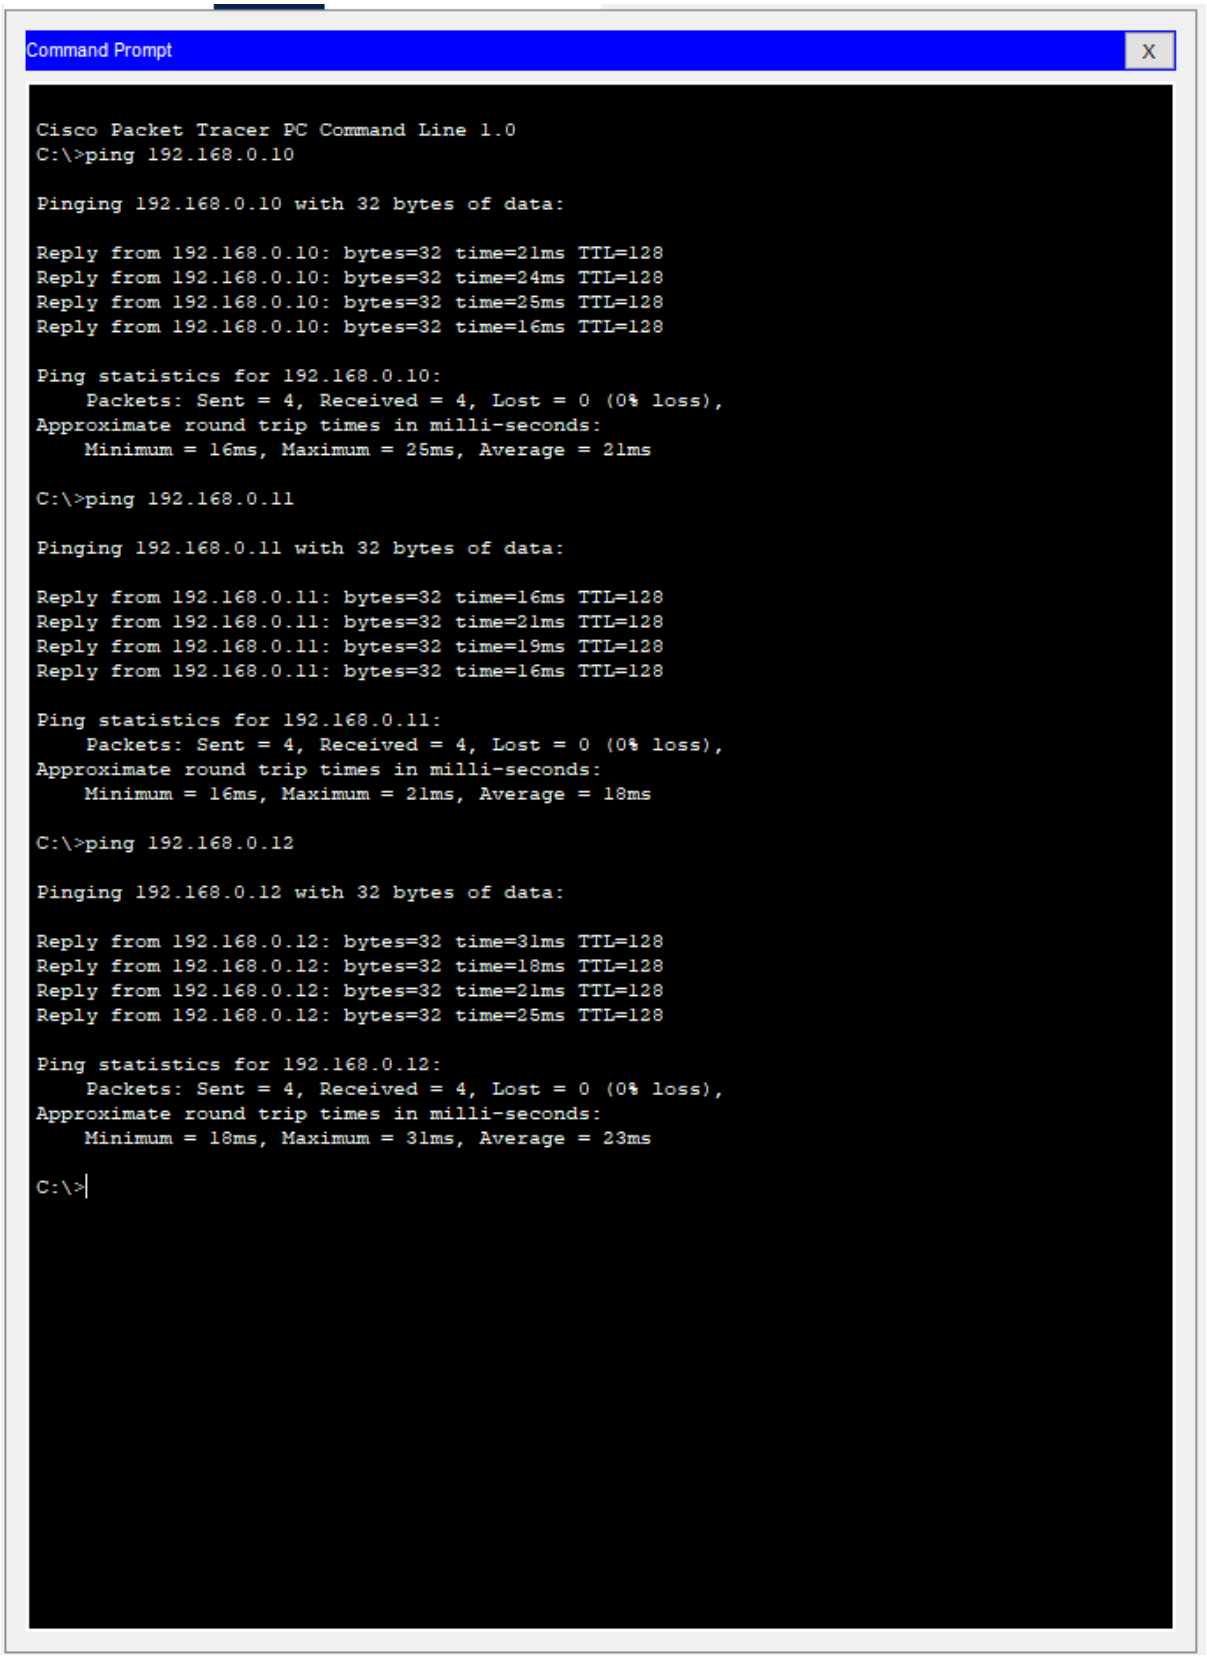
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.10
Pinging 192.168.0.10 with 32 bytes of data:
Reply from 192.168.0.10: bytes=32 time=21ms TTL=128
Reply from 192.168.0.10: bytes=32 time=24ms TTL=128
Reply from 192.168.0.10: bytes=32 time=25ms TTL=128
Reply from 192.168.0.10: bytes=32 time=16ms TTL=128
Ping statistics for 192.168.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 16ms, Maximum = 25ms, Average = 21ms
C:\>ping 192.168.0.11
Pinging 192.168.0.11 with 32 bytes of data:
Reply from 192.168.0.11: bytes=32 time=16ms TTL=128
Reply from 192.168.0.11: bytes=32 time=21ms TTL=128
Reply from 192.168.0.11: bytes=32 time=19ms TTL=128
Reply from 192.168.0.11: bytes=32 time=16ms TTL=128
Ping statistics for 192.168.0.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 16ms, Maximum = 21ms, Average = 18ms
C:\>ping 192.168.0.12
Pinging 192.168.0.12 with 32 bytes of data:
Reply from 192.168.0.12: bytes=32 time=31ms TTL=128
Reply from 192.168.0.12: bytes=32 time=18ms TTL=128
Reply from 192.168.0.12: bytes=32 time=21ms TTL=128
Reply from 192.168.0.12: bytes=32 time=25ms TTL=128
Ping statistics for 192.168.0.12:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 18ms, Maximum = 31ms, Average = 23ms
C:\>