
Section 1

Networking basics — LAN, WAN, routers, switches

Networking: Networking is the **process of connecting computers, devices**, or people so they can communicate and share information or resources (Data).

Why we use Network

- Share info or data
- Share Hardware and Software
- Emails or message
- Audio and Video calls
- Share printers
- Share Hard drives

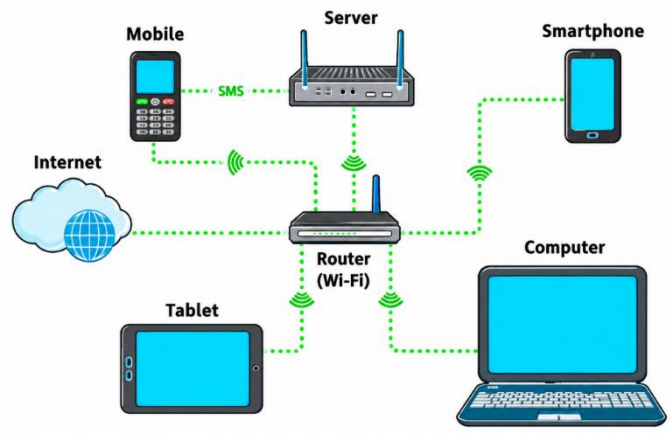


Switch: is hardware that connects devices (like computers, printers, and gaming consoles) within a Local Area Network (LAN)

Example of switch






Switch talks to a different devices across your local area network. Sends your request to a relevant network device.
Wireless Access Point (WAP) : used to connect wireless devices.

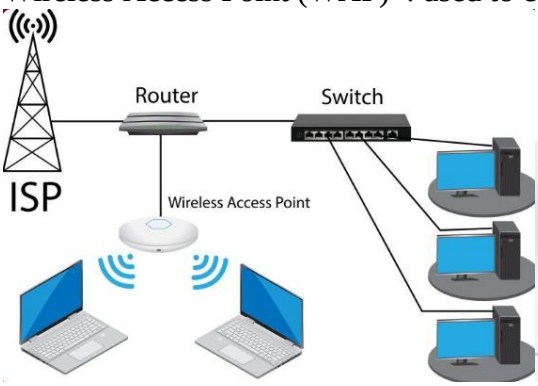




- **Hub:** Connects group of hosts


Example of Hub




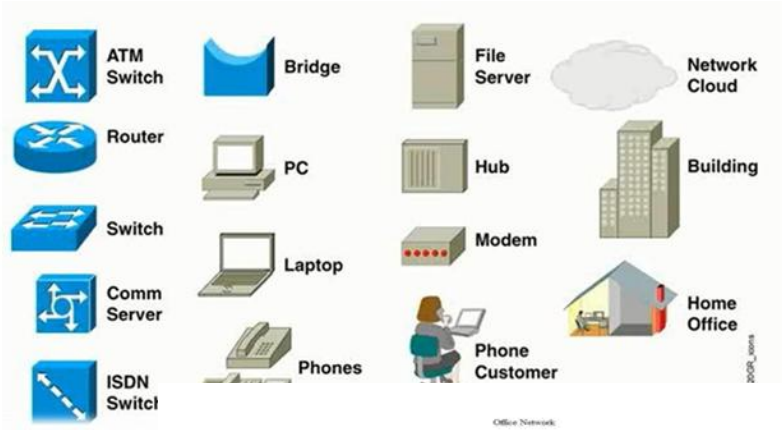

- **Router:** connects different networks or distance networks

Example of Router

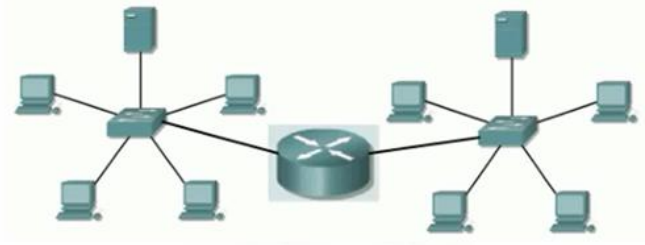


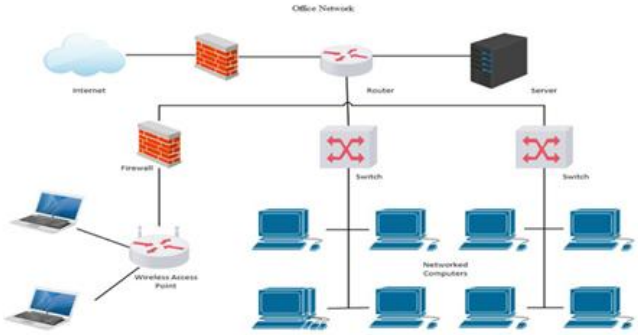

Local Area Networks (LANs) -> Operate within a limited geographic area such as office or Home

Metropolitan-area Networks (MANs) ->

Wide-area Networks (WANs) -> Operate over a large geographical area or connect LANs.

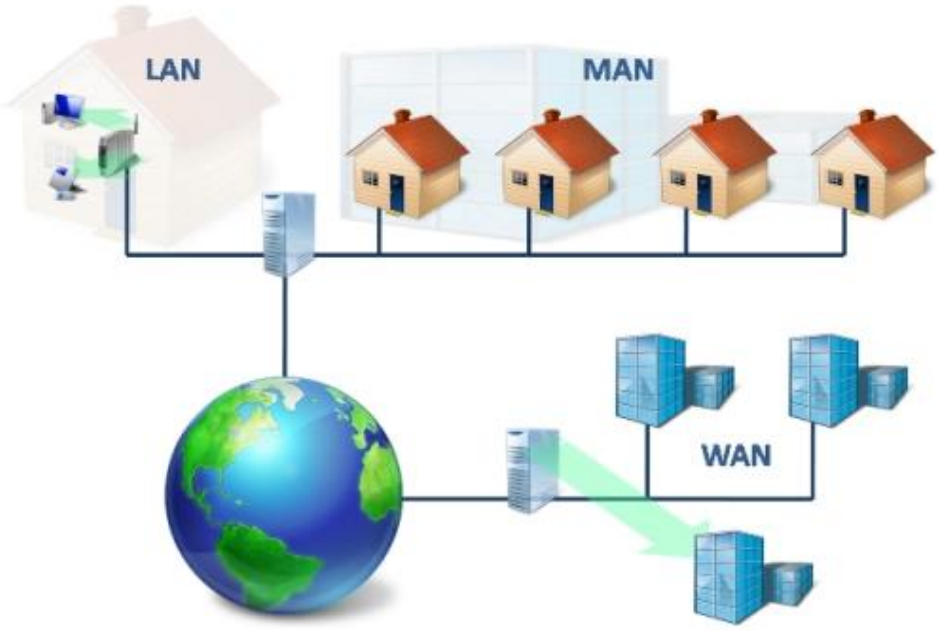


Bandwidth:

Speed of internet is called Bandwidth.

Firewall




Firewall has DMZ (Demilitarized Zone ad-hock or direct connection will be reported to DMZ) and Port FWD (identifies port for our local introduced (subnet) devices).

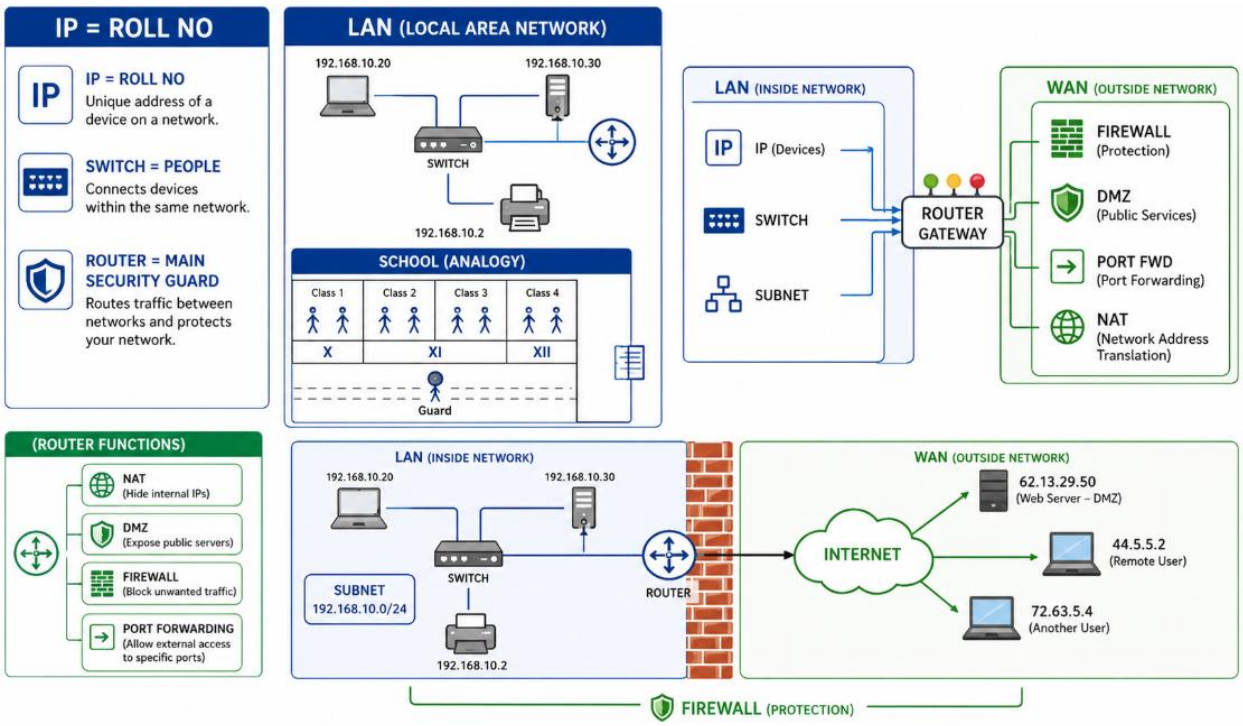

Measuring Bandwidth


Bits per second	Abbreviation	Equivalence
Bits Per Second	bps	1 bps=fundamental unit of bandwidth
Kilobits Per Second	kbps	1kpbs=~1,000 bps=10^3 bps
Megabits Per Second	Mbps	1 Mbps=~1,000,000 bps =10^6 bps
Gigabits Per Second	Gbps	1 Gbps=~1,000,000,000 bps =10^9 bps
Terabits Per Second	Tbps	1 Tbps=~1,000,000,000,000 bps= 10^{12} bps

Topologies (Shape of Possible Networks):
Structure in network is called topology.
Mainly used are **star** and **tree**

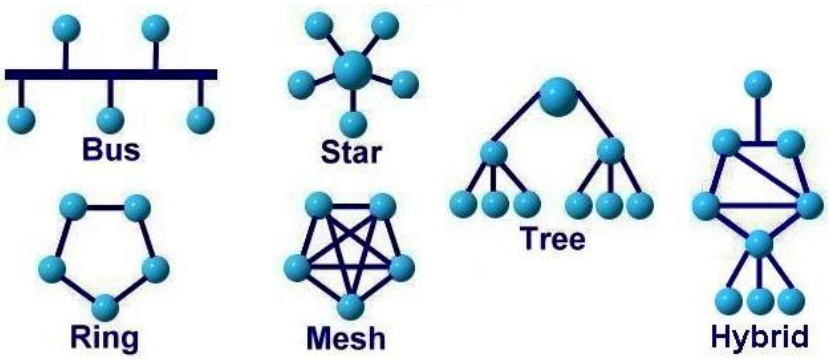


Cable Types


Cat 5 (Category 5) and **Cat 5e (Category 5 enhanced)** are Ethernet cables that use twisted pairs of copper

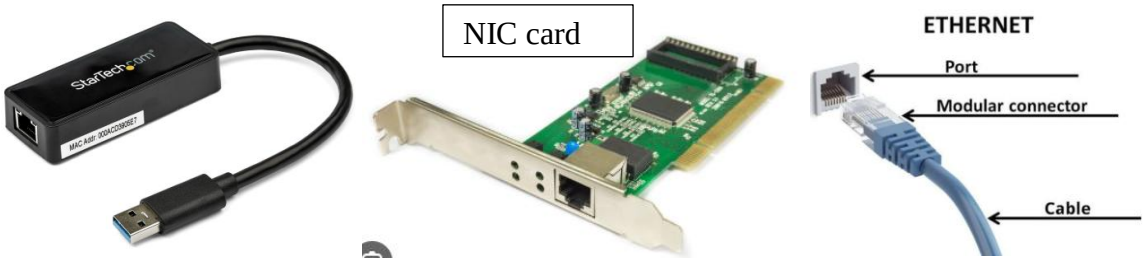

- **Straight through**: connects two different type of devices such as computer to switch, Router to switch. A straight-through cable has the same wiring standard on both ends**.** (**RJ45** connector)

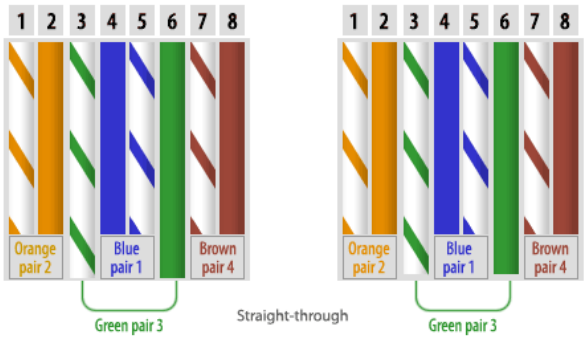

- **Cross over** : connects two like network devices

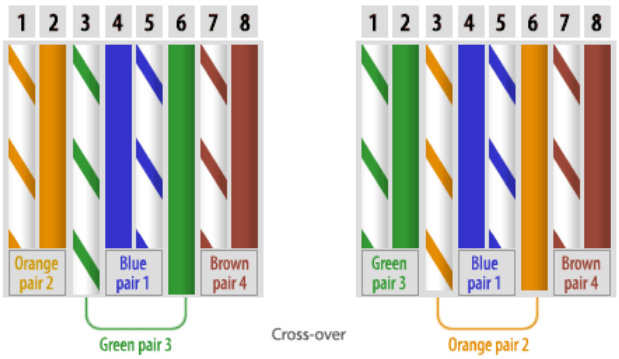

Rollover cable (Console cable)

Eaton Tripp Lite Series USB to RJ45 Cisco Serial Rollover Cable, USB Type-A to RJ45 M/M, 6 ft - serial adapter - USB

MFG # U209-006-RJ45-X CDW # 3862330 UNSPSC 26121600 Reviews ★★★★★ (28)



~~$81.47~~ Save $46.48

$34.99 Sign in for your price

Advertised Price

1

In Stock (316 Units Available)

Get it **Wed, Oct 28**

Est. delivery date for **10001**

Add to Cart

Add to Compare Save to Favorites

Choose a Warranty

No Protection Plan

Generally this cable is used for the configuration of router and switch. Which dosent need ip address


Protocols- of transport layer


- At the **Transport Layer**; you can find these common protocols:
- **SPX** – Sequenced Packet Exchange
- **TCP** – Transmission Control Protocol
- **UDP** – User Datagram Protocol
- **SCTP** – Stream Control Transmission Protocol

Protocols – of Network Layer

- At The Network Layer You Can Find These Common Protocols:
- ATP – Apple Talk Transaction Protocol
- IPV4 – Internet Protocol V4
- Ipv6 – Internet Protocol
- IPX – Internetwork Packet Exchange
- ICMP – Internet Control Message Protocol
- IGMP – Internet Group Management Protocol
- OSPF – Open Shortest Path First

IP addressing — IPv4, IPv6, Subneting

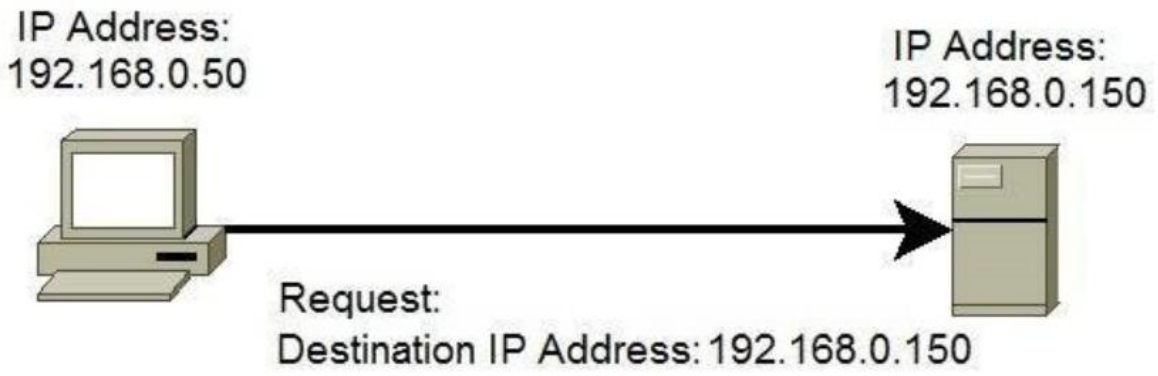

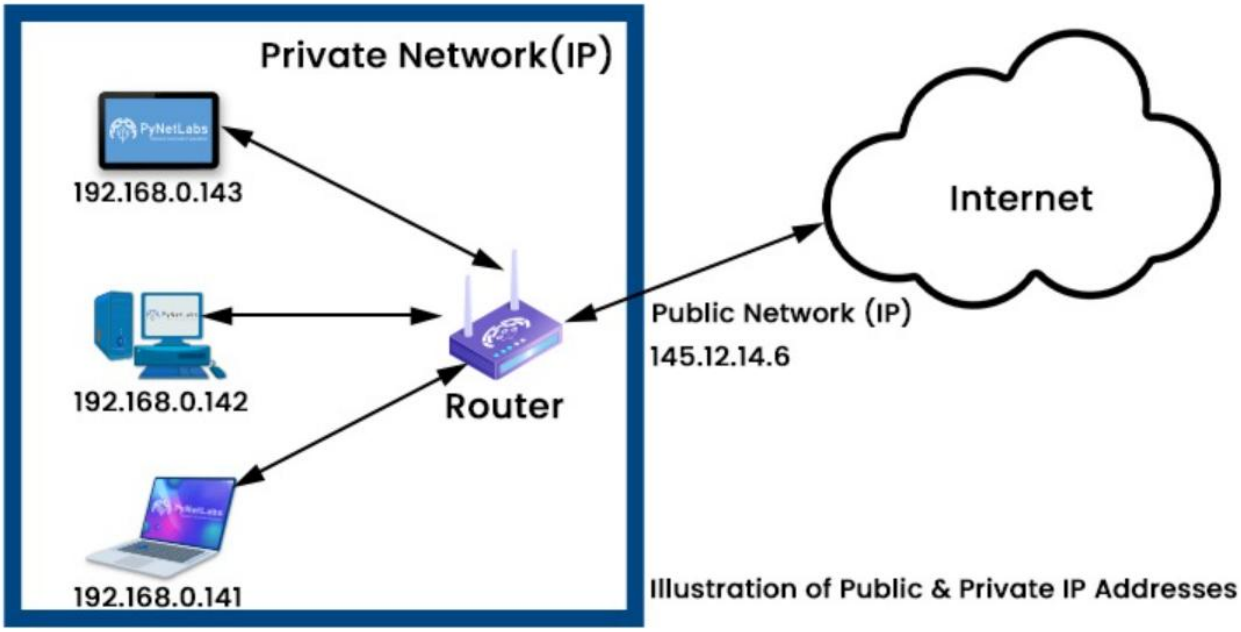

Any network needs 3 things IP, Subnet and Gateway (IP address of Router is called gateway)

LAN Card has two addresses as below

✓ IP Address
✓ MAC Address

IP (internet protocol) Address:

MAC (Media access control) Address

A changeable logical address assigned to acms computer or device to identify it and communicate with other devices on a network.

✓ once cabling id done, we must assign IP address for all the network computers. After that the network computers can communicate, share, apply policy, and sending message etc. to others.


CMD = > getmac to get current device mac address (ipconfig)
The TCP/IP suite defined five blocks of addresses, called **IP address classes**, for specific network uses and sizes.

Address Class	Range	Default Subnet Mask	Networks/Nodes
Class A	1.0.0.0 to 127.255.255.255	255.0.0.0	126 networks of up to 16,777,214 nodes each
Class B	128.0.0.0 to 191.255.255.255	255.255.0.0	16,382 networks of up to 65,534 nodes each
Class C	192.0.0.0 to 223.255.255.255	255.255.255.0	2,097,150 networks of up to 254 nodes each
Class D	224.0.0.0 to 239.255.255.255	None	All members of the multicast session share the same IP address
Class E	240.0.0.0 to 255.255.255.255	None	Strictly for research and experimentation purposes


Ex: IP 192.168.1.0
Ex: Sub netmask 255.255.255.0


Means we have 3 octet of Networks and 1 Host. So N.N.N.H so we can't change Networks but we can change Host and also we can do sub-netting.

If you want assign new IP address:
Control Panel, Network and Internet – Network and Sharing Center- Properties – TCP/ip4




IPv4 has totally 32 – bit logical address

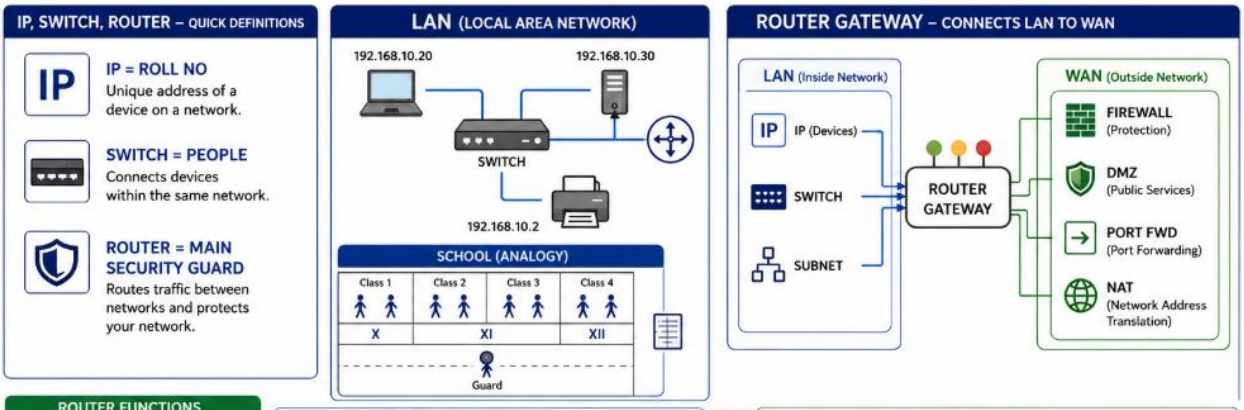

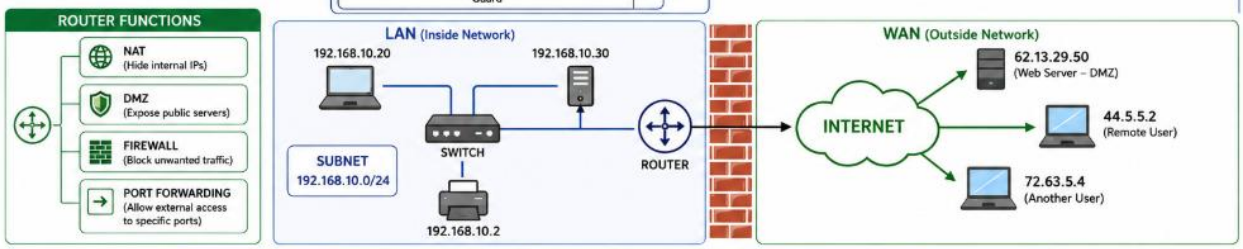



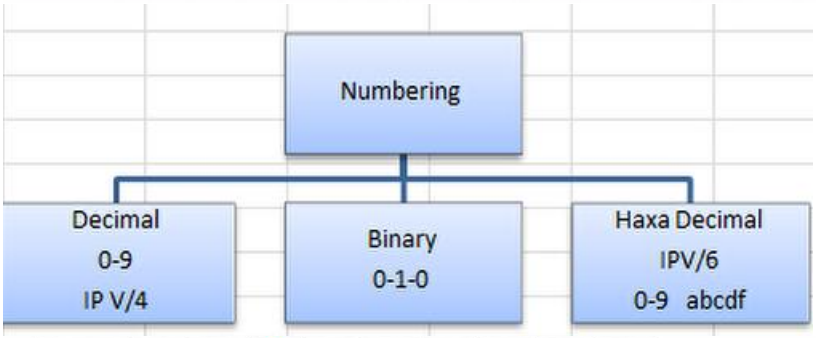

Subnet	1	2	4	8	16	32	64	128	256
Host	256	128	64	32	16	8	4	2	1
Subnet Mask	/24	/25	/26	/27	/28	/29	/30	/31	/32
	0	0 128 128	128 64 192						

192.168.4.0

Make 3 subnets

Total subnets 4
Total host IDs 64 - 2 = 62 including network ID and broadcast ID
Subnet Mask 255.255.255.192

Network ID	Subnet Mask	Host ID Range	# of Usable Host	Broadcast ID
192.168.4.0	/26	192.168.4.1-192.168.4.62	64- 2 = 62	192.168.4.63
0+64 = 64 192.168.4.64	/26	192.168.4.65-192.168.4.126	62	192.168.4.127
64+64 = 128 192.168.4.128	/26	192.168.4.129-192.168.4.190	62	192.168.4.191
128+64 = 192 192.168.4.192	/26	192.168.4.193-192.168.4.254	62	192.168.4.255

Subnetting	1	2	4	8	16	32	64	128	256
Hosts	256	128	64	32	16	8	4	2	1
Subnet Mask	/24	/25	/26	/27	/28	/29	/30	/31	/32

192.168.1.0

I need 8 subnetting?

32−2=30

previous number plus Hosts num

0	128	192	224
0	128	64	32
	128	192	224

255.255.255.0

255.255.255.224

Subnet	Network ID	Usable Host Range	Broadcast ID
1	192.168.1.0/27	192.168.1.1 – 192.168.1.30	192.168.1.31
2	192.168.1.32/27	192.168.1.33 – 192.168.1.62	192.168.1.63
3	192.168.1.64/27	192.168.1.65 – 192.168.1.94	192.168.1.95
4	192.168.1.96/27	192.168.1.97 – 192.168.1.126	192.168.1.127
5	192.168.1.128/27	192.168.1.129 – 192.168.1.158	192.168.1.159
6	192.168.1.160/27	192.168.1.161 – 192.168.1.190	192.168.1.191
7	192.168.1.192/27	192.168.1.193 – 192.168.1.222	192.168.1.223
8	192.168.1.224/27	192.168.1.225 – 192.168.1.254	192.168.1.255

CCNA-Homework:

Subneting	1	2	4	8	16	32	64	128	256
Host	256	128	64	32	16	8	4	2	1
Subnet Mask Base	/24	/25	/26	/27	/28	/29	/30	/31	/32

0

128+0 = 128

192.168.0.0/25

we need 2 subnetting
Total Host = 128
Total Usable Host = 128-126
subnet Mask
255.255.255.128

Network ID	Subnet Mask Base	Host ID Range	Broadcast ID
192.168.0.0	/25	192.168.0.1 - 192.168.0.126	192.168.0.127
192.168.0.128	/25	192.168.0.129 - 192.168.0. 254	192.168.0.255

Note: to calculate broadcast ID we subtract 1 from Host

Note: to make Host range we add total usable host to Network ID such as 0+126 or 128+126 = 254

Subnet defines your local area network Range. Subletting are private IP address that defines some one's computer.
All classes are divided into two Parts Private IPs and Public IPs

ICANN has set aside three nonroutable address ranges that a company can use internally to enable their network nodes to communicate with one another using TCP/IP.

The private, nonroutable IP address ranges are:

10.0.0.0	to	10.255.255.255
172.16.0.0	to	172.31.255.255
192.168.0.0	to	192.168.255.255

Custom subnet masks topic

Public and Private IPs

128	16	0	1	128	31	0	1

We can make 15 networks in B class

222.0.0.1 This public IP other than the range of Private IP.


SUBNET 192.168.0.2 - 192.168.0.254

Cisco

Cisco Systems was founded in **1984** by married couple **Leonard Bosack and Sandy Lerner**, who worked at **Stanford University**. The first thing they created was gateway server to communicate. They helped develop networking technology that allowed computers on **different networks and departments to communicate**, which led to the creation of **Cisco routers**. The company was named **Cisco**, derived from **San Francisco**, California. **Cisco Packet Tracer**: is a virtual networking lab used to practice Cisco networking and CCNA skills.


Ex: 8 bits C class IP subnetting 192.168.4.0

192 sub netting

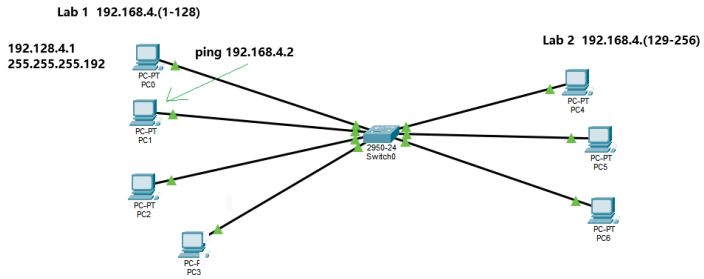

Switch + Access Point Setup

LAN wireless + line

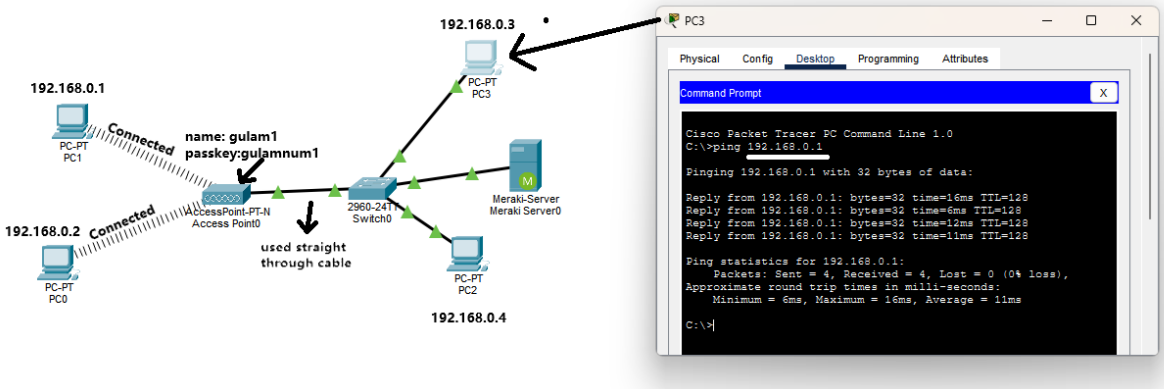

Reconnaissance Attacks

Discovery and mapping of systems to gather information.

Intruders look for vulnerable services.

Access Attacks

Exploit known vulnerabilities

Password Attacks

Repeated attempts, Brute-force

Disable on unsuccessful logins

OTP (One Time Password)

Strong Password



Section 2


Client and Server
Server: is the computer that controls clients.
DNS Server: converts name.com to IP and IP to name.com
Active Directory
Set of rules used to create users, and rules for the clients.

Characteristics of Network

- Speed: How fast data transmitted over the network.
- Cost: General cost of components, installation, and maintenance.
- Security: How secure the network?
    - ([Number of minutes in a year-downtime]/[Number of minutes in a year])*100=Percentage availability
    - 15 minutes downtime =99.997
- Scalability and Reliability: How well your network can accommodate more users and MTBF (Mean time between failures)

Need for Network Security

- 60 to 80 percent of network misuse comes from inside
- Open and close Network
- Closed Network does not allow a connection to public networks

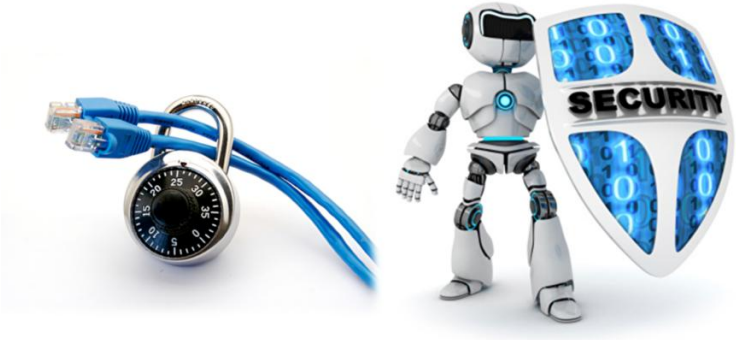

Classes of Attack

- Passive: Traffic analysis, monitoring communication
- Active: Attempts to circumvent or break protection features i.e. DOS
- Close-in: Attempting to go close physical proximity to networks, systems, or facilities
- Insider: Malicious insiders intentionally eavesdrop, steal, or damage information
- Distributed: Malicious modification of hardware or software during distribution with back door installed

Mitigating Common Threats



Physical Installations



✓ Room Look
✓ No access from ceiling
✓ Electronic access control (Biometric)
✓ CCTV (Closed-circuit television)
✓ Temperature and humidity control systems (HVAC) (Heating,ventilation,and air conditioning)
✓ Electrostatic and magnetic interference
✓ UPS and backup generator



Note: Lock is not the Preventive control



Network Layers OSI (Open Systems Interconnection)

7 — Application Layer
✓ Message format, Human-Machine Interfaces

6 — Presentation Layer
✓ Coding into 1s and 0s; encryption, compression

5 — Session Layer
✓ Authentication, permissions, session restoration

4 — Transport Layer
✓ End-to-end error control


3 — Network Layer
✓ Network addressing; routing or switching

2 — Data Link Layer
✓ Error detection, flow control on physical link

1 — Physical Layer
✓ Bit stream: physical medium, method of representing bits

UPPER LAYERS: 7, 6, 5
TRANSPORT SERVICE: 4, 3, 2, 1

Letter	Name	Notes
A	NDREW	company owner speaks Japnies
P	ARVEEN	Translate, Encrypt
S	EEMA	appointment
T	ANVEER	make it down to pieces, packs, sigma
N	NAVEED	two way address, send and receive
D	AVID	seal it
P	EON	physically deliver, send as signal

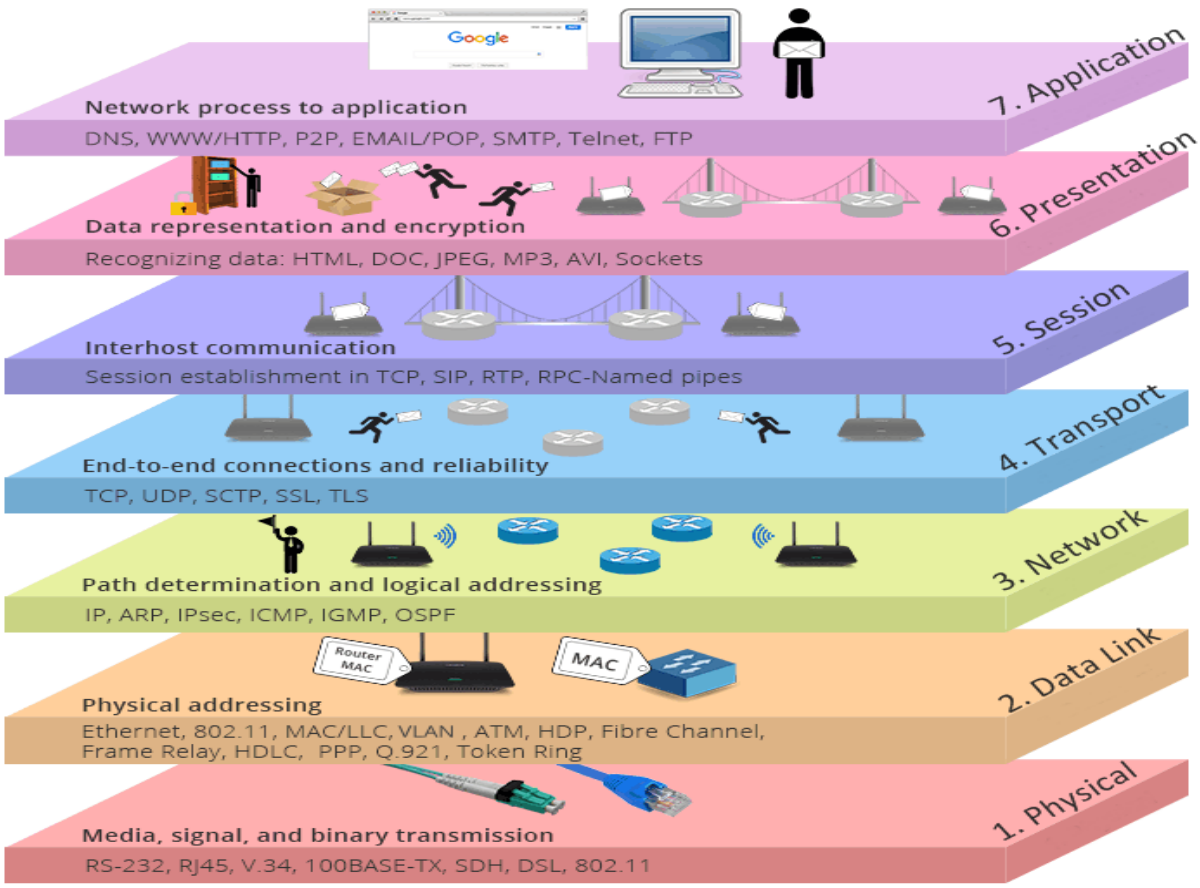

Switching — VLANs, trunking, STP

Day 1

Switch CLI Modes

- User EXEC mode:
  - Show or other basic troubleshooting commands
- Privileged EXEC mode:
  - Full-Access Level
  - Enable Command
- Configuration Mode
  - Config t

Switch configuration using console cable we connect SP of computer the switch console port. Now we enter from our PC – Desktop – Terminal –

```
Switch>
```

This exec Mode if we want to switch to privilege Mode then we write **en**
Or if we want to change Mode to configuration then we write **configure t**

Day 2

Changing Switch Name and password

- Enable en
- Configure terminal confi t
- Hostname KDR
- Enable password *khan*
- exit
- exit
- en
- password *khan*

if we want to remove security or password from switch then we write (**no enable password)** in config mode.

To Show Ports_____

SW> Enable

SW#show ip interface brief **shows all active ports up means connected and down mean not in use**

This is used to shutdown a port _____

Switch#configure terminal

Switch(config)#interface fastEthernet 0/4

Switch(config-if)#shutdown

This is used to shutdown range ports_____

SW#show ip interface brief

Switch#configure terminal

Switch(config)#interface range fastEthernet 0/4 -24

Switch(config-if-range)#shutdown

This is used to up the port_____

Switch#configure terminal


no shutdown

Switch(config)#interface fastEthernet 0/10


Routing — static routes and OSPF

Router setup with Wireless Network

Routers have **DHCP servers inside which assigns by default IP addresses when it is enabled. And when we make it Disabled then we can assign Static IP means manually entering IPs.**

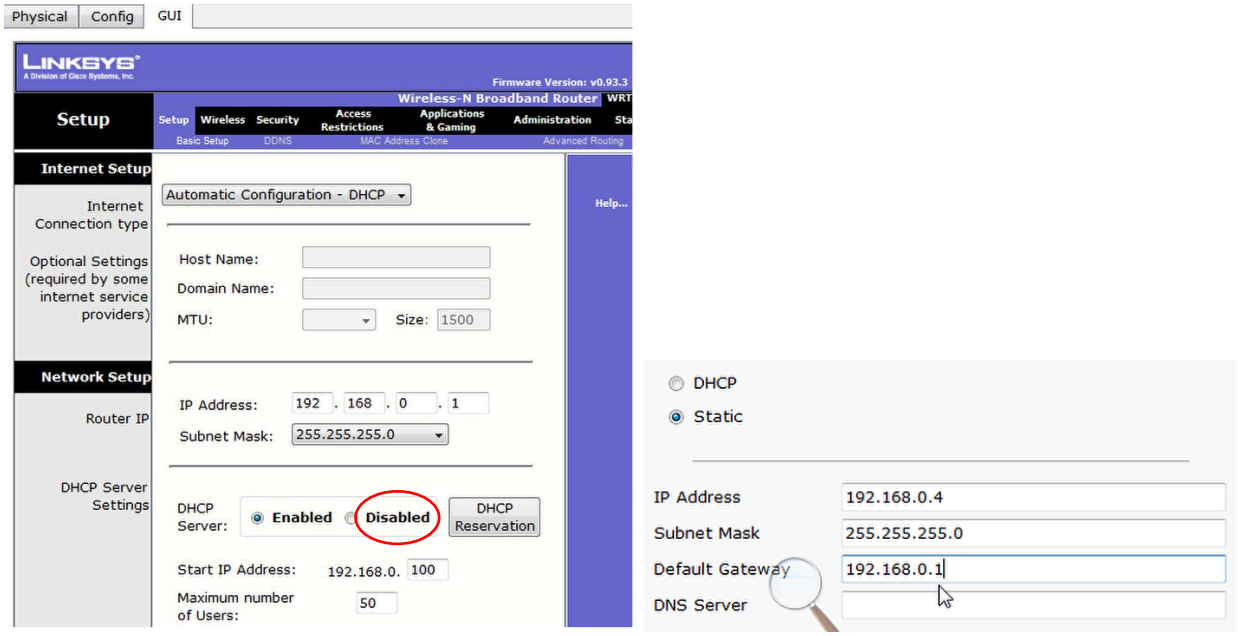

How to change Network Name

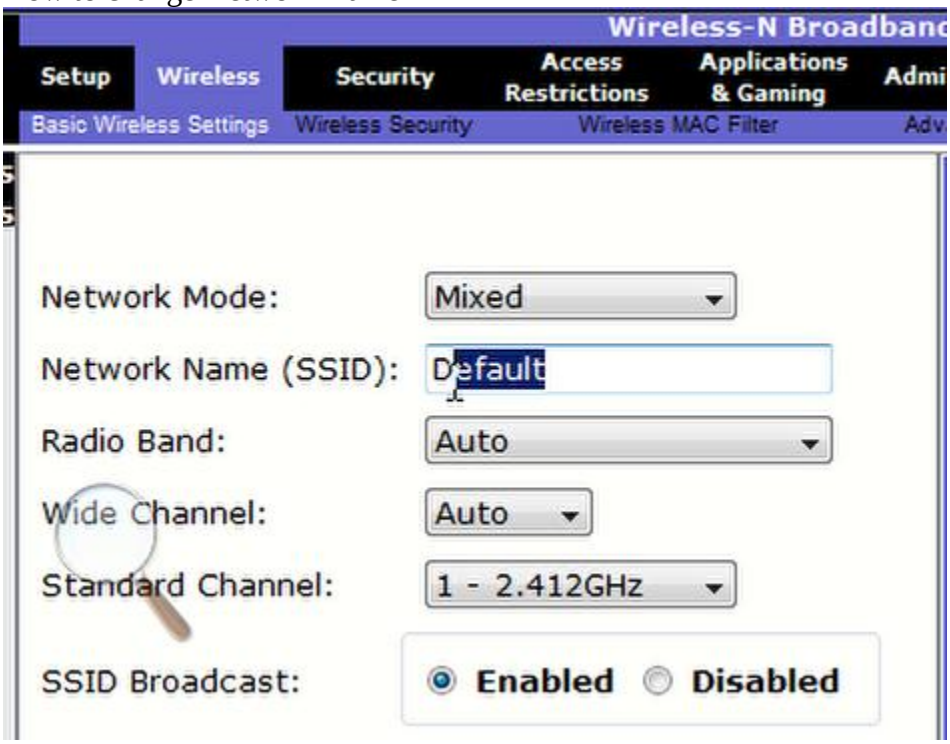

In Administer tab we can change router admin password
In wirless security we can allow or block mac address
How to find mac address cmd – ipconfig/all the physical address is your mac address.

How to configure router from a client browser

Step 1:
Make a wireless connect setup


Step 2:
Click on a laptop/computer/pc you made
Step 3:
Click on desktop then on web browser
Step 4:
Enter your gateway IP
Step 5:
Then ender admin admin
Step 6:
Go to wireless then click wireless security then give it a passphrase
Step 7:
Then connect the computer and you're done

Wireless networking


Network security

NAT, DHCP, DNS

Network automation and programmability

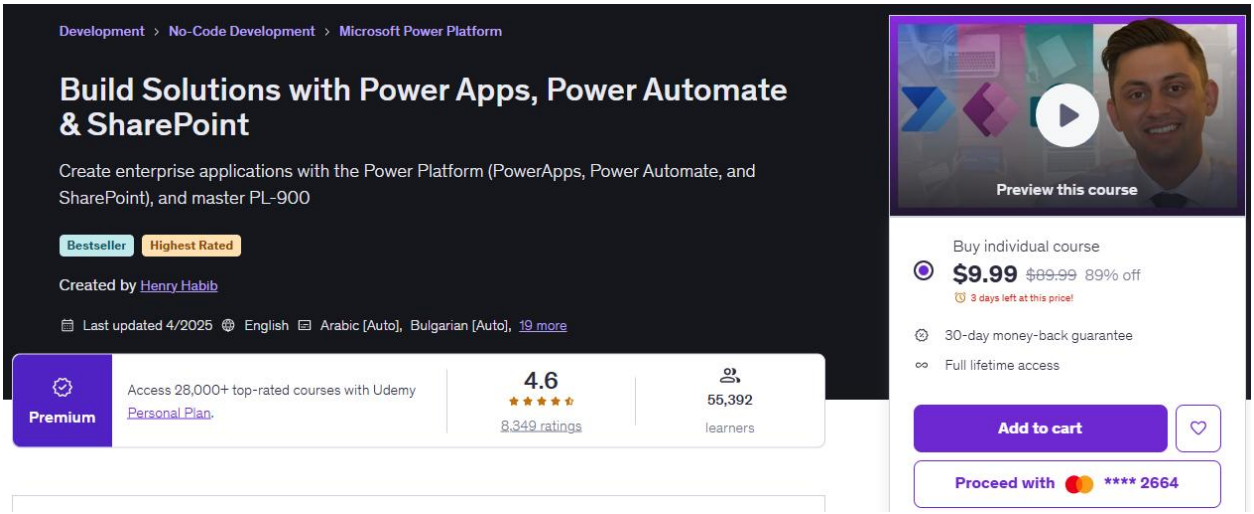

https://www.coursera.org/google-career-certificates

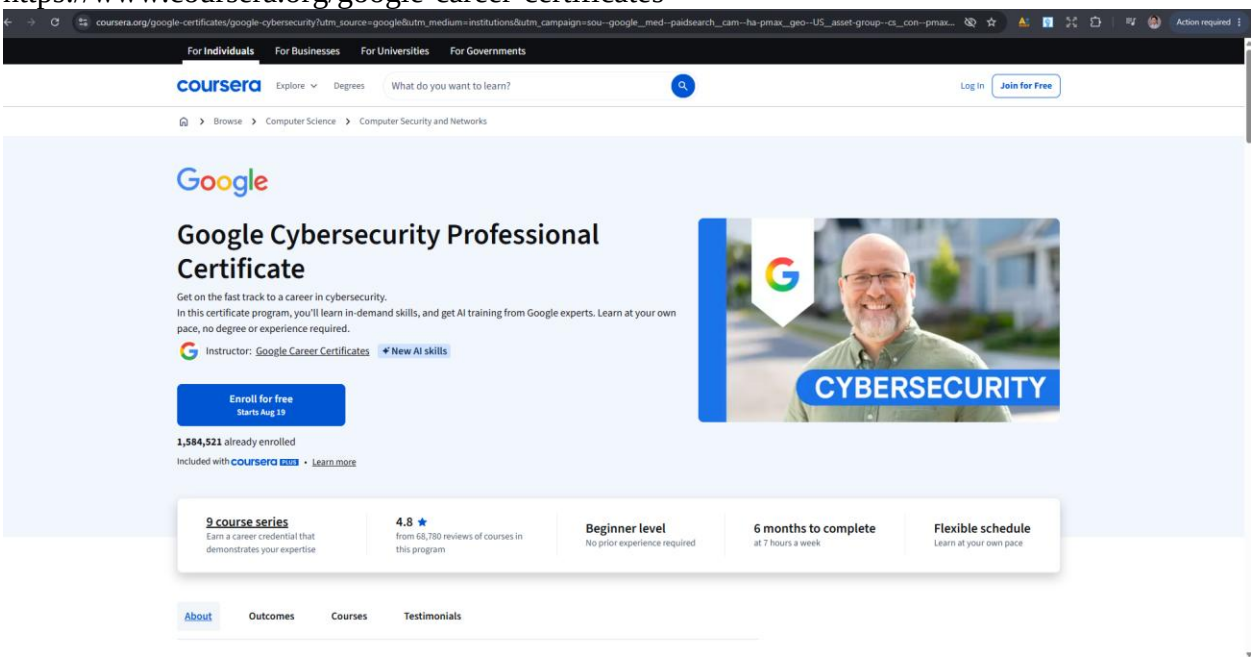

https://www.coursera.org/google-certificates/google-cybersecurity?utm_source=google&utm_medium=institutions&utm_campaign=sou--google__med--paidsearch__cam--ha-pmax__geo--US__asset-group--cs__con--pmax__LP--DR__ter--null&gwg_campaign_id=20906443665&gwg_exp=null&gwg_ad_id=GCLID--CjwKCAjwqJXUBhBNEiwA8BgG7vYxmpYotdUV-juPKqYwcXDwTAiRCuJm-j6g_oQjXUZ1ESUE0fEDPBoCGpkQAvD_BwE&_gl=1*1nbigtr*_gcl_aw*R0NMLjE3ODcxNzE5MzUuQ2p3S0NBandxSlhVQmhCTkVpd0E4QmdHN3ZZeG1wWW90ZFVWLWp1UEtxWXdjWER3VEFpUkN1Sm0tajZnX29RalhVWjFFU1VFMGZFRFBCb0NHcGtRQXZEX0J3RQ..*_gcl_au*MjA1NTMyMjQyNC4xNzg3MTcxOTM1