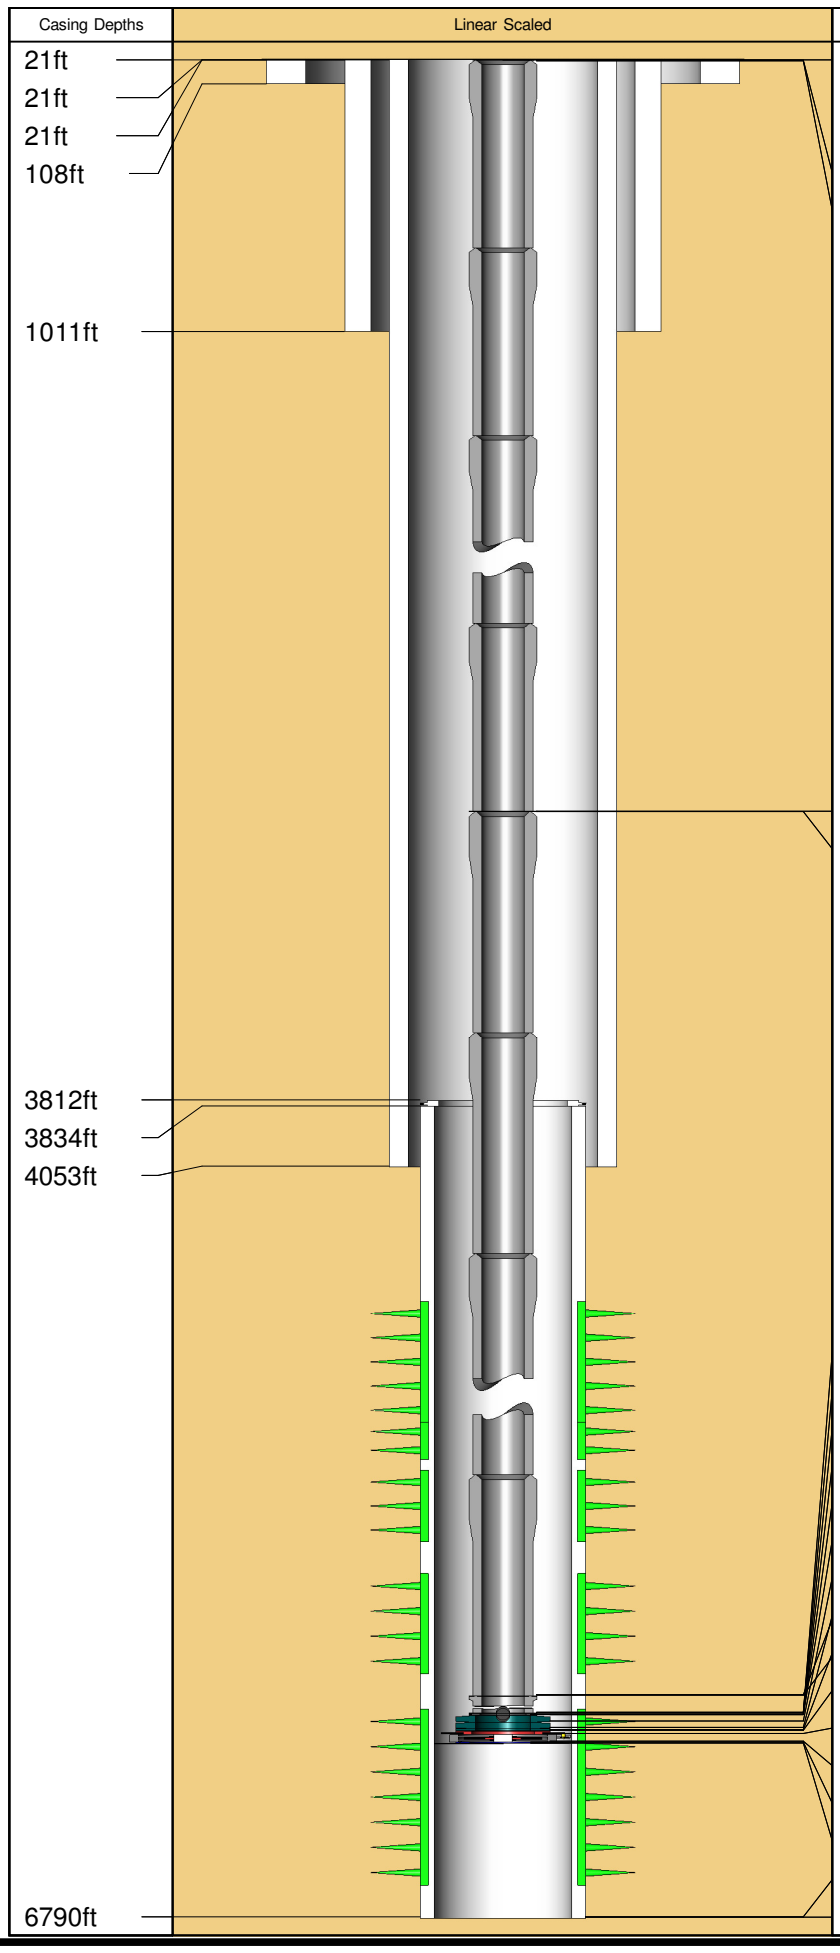


20" Casing					
Component	Joints	Top(ft)	Length(ft)	OD(in)	Wt(ppf)
Casing		21	87	20.0000	88.0
13 3/8" Casing					
Component	Joints	Top(ft)	Length(ft)	OD(in)	Wt(ppf)
Casing		21	990	13.3750	54.5
9 5/8" Casing					
Component	Joints	Top(ft)	Length(ft)	OD(in)	Wt(ppf)
Casing		21	4,032	9.6250	47.0
7" Production Liner					
Component	Joints	Top(ft)	Length(ft)	OD(in)	Wt(ppf)
Liner Hanger		3,812	22	7.0000	26.0
Casing		3,834	2,956	7.0000	26.0

TUBING						
Component type	Jts.	Top(ft)	Lnth(ft)	OD(in)	Grade	Thread
Tubing Hanger	1	21	1			
Tubing	1	22	2	2.8750	N-80	EUE 8RD
Tubing	87	24	2,735	2.8750	N-80	EUE 8RD
Tubing Fatigue Nipple	1	2,759	1	2.8750	N-80	EUE 8RD
Tubing	104	2,760	3,220	2.8750	J-55	EUE 8RD
Tubing Fatigue Nipple	1	5,980	1	2.8750		EUE 8RD
Tubing	2	5,982	62	2.8750	J-55	EUE 8RD
Tubing Drain	1	6,044	1	2.8750		EUE 8RD
Pup Joint	1	6,044	6	2.8750		EUE 8RD
Tubing Check Valve	1	6,050	1	2.8750		EUE 8RD
X-Over	1	6,051	1	2.3750		EUE 8RD
Discharge Head / Tubing Adapter	1	6,052	0	2.3750		EUE 8RD
Electrical Submersible Pump	1	6,053	24	4.0000		
Electrical Submersible Pump	1	6,076	24	4.0000		
Electrical Submersible Pump	1	6,100	8	4.0000		
Intake / Gas Separator	1	6,107	3	4.0000		
ESP Seal	1	6,110	12	4.0000		
ESP Motor	1	6,122	27	4.5000		
ESP Assy - Press/Temp Sensor	1	6,149	4	4.0000		
Protector	1	6,153	3	2.3750		

Other Plug						
Component type	Jts.	Top(ft)	Lnth(ft)	OD(in)	Grade	Thread
OTHER PLUG	1	6,790	1	7.0000		

Net interval: 1,254ft
Gross interval: 2,126ft
Intervals: 34

Top(ft)	Base(ft)	Interval(ft)	(shot/ft)
4,544	4,562	18	4
4,567	4,577	10	4
4,589	4,596	7	4
4,665	4,744	79	4
4,759	4,766	7	4
4,803	4,813	10	4
4,834	4,984	150	4
5,010	5,050	40	4
5,062	5,120	58	4
5,158	5,290	132	4
5,337	5,374	37	4
5,388	5,420	32	4
5,536	5,584	48	4
5,600	5,670	70	4
5,696	5,740	44	4
5,766	5,808	42	4
5,818	5,836	18	4
5,854	5,900	46	4
6,028	6,060	32	4
6,070	6,086	16	4
6,094	6,118	24	4
6,130	6,137	7	4
6,147	6,172	25	4
6,198	6,228	30	4
6,239	6,278	39	4
6,287	6,295	8	4
6,312	6,322	10	4
6,330	6,337	7	4
6,360	6,367	7	4
6,407	6,414	7	4
6,427	6,432	5	4
6,449	6,494	45	4
6,514	6,538	24	4
6,550	6,670	120	4

Net interval: 334ft
Gross interval: 1,151ft
Intervals: 13

Top(ft)	Base(ft)	Interval(ft)	(shot/ft)
4,589	4,596	7	4
4,596	4,597	1	4
4,710	4,730	20	4
4,834	4,984	150	4
4,984	4,985	1	4
5,038	5,050	12	4
5,210	5,250	40	4
5,270	5,290	20	4
5,535	5,536	1	4
5,536	5,558	22	4
5,600	5,620	20	4
5,650	5,665	15	4
5,715	5,740	25	4

Casing Details	Casing OD	Casing Wt	Casing Depths
Liner Hanger	7.000in	26.0ppf	3812ft
Casing	7.000in	26.0ppf	3834ft
Casing	20.000in	88.0ppf	21ft
Casing	13.375in	54.5ppf	21ft
Casin g	9.625in	47.0ppf	21ft 108ft
USDW MD 2064 TVD 2051			1011ft
			4053ft
			6790ft