
WELLBORE DIAGRAM – AS P&A

Well Name: Taylor 154
API # 04111 04595
Field: Ventura
Well Type: Producer
Drill Date: 04/02/1942
KB: 8.42 above G.L.: 661.49'

New NAD 83 Coordinates:
GL = 654'
Lat: 34.321259
Long: -119.316697

TOC Plug 5: Surface
Cement retainer set at 103'
Found holes in casing 110' - 264'
TOC Plug 4: 494'

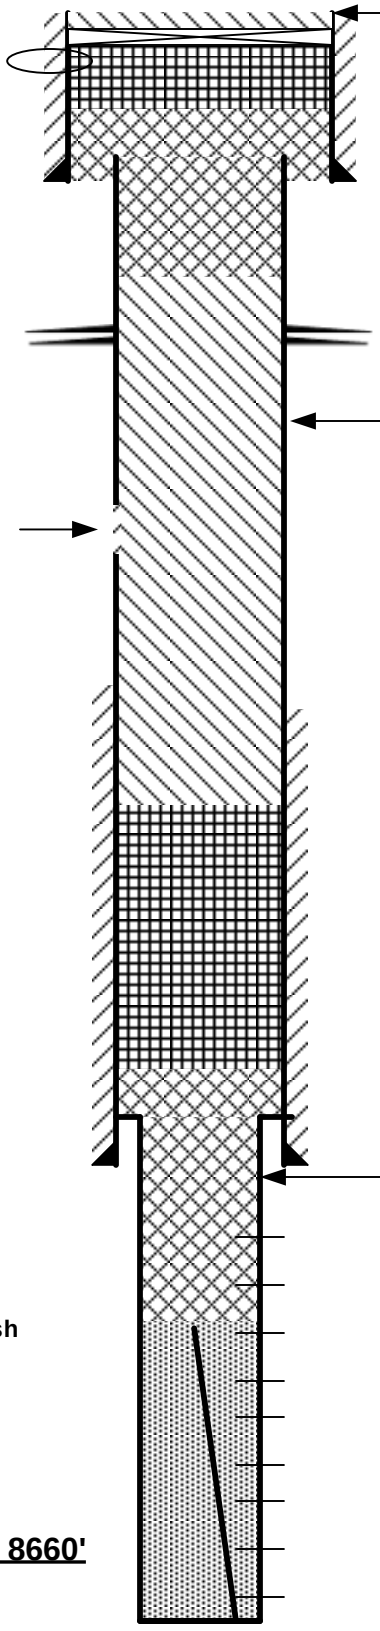

SURFACE CASING DETAIL:
11-3/4" 40.24# C-45
0' - 696'
Cmt'd w/ 450 sx, in a 16" hole, Good cement returns

TOC Plug 3: 1407'

Base of USDW - 1530

Perf. & Squeeze 1: 1525' - 1535'

PRODUCTION CASING DETAIL:
7" 0-8410'
-24# 658' (stub) - 5210'
-26# 5210' - 7010'
-28# 7010' - 8410'
Cmt'd w/ 800 sx (120 lbs/cf), in a 10-5/8" hole.
Est TOC @ 5818'

Squeezed casing hole @ 4826" w/ cmt on 1/24/1945

TOC Plug 2: 7021'

Top B Block (AP-B) - 7493'

TOC Plug 1: 8081'

Top T180 Block - 8414'

LINER DETAIL:
5" 18# J-55
8379'-9745'

ED was 8,660' 4/29/1979 due to fish and fill running in

PERFORATIONS:
Closed
3/8" Holes
8420'-9745'

Cleanout Depth @ 8660'

TD @ 9750'