

Fig. 44

- ① Main shaft
- ② Intermediate plate
- ③ Pinion gear
- ④ Selector fork 1st and 2nd gear

- ⑤ Selector fork 3rd and 4th gear
- ⑥ Shift rod with fork for reverse gear
- ⑦ Shift rod for 1st and 2nd gear
- ⑧ Shift rod for 3rd and 4th gear

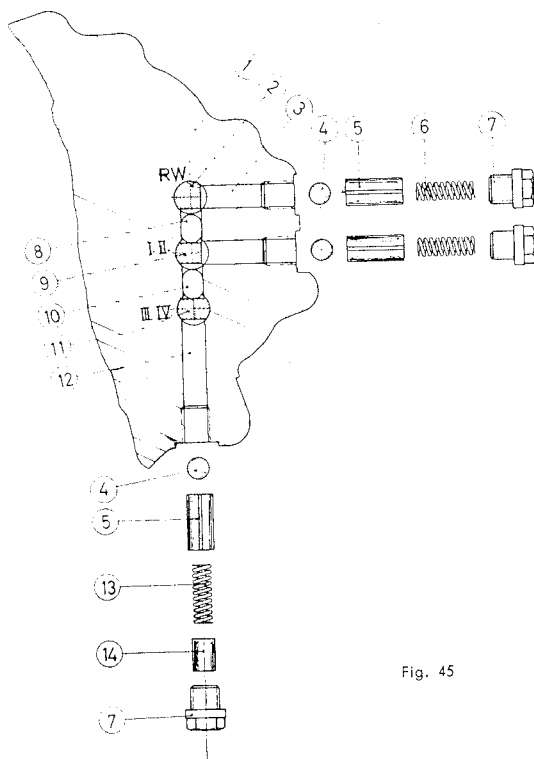


Fig. 45

Arrangement of Selector Interlocks

- ① Intermediate plate
- ② Shift rod for reverse gear
- ③ Bore for reverse gear interlock (seat for part 5)
- ④ Locking ball
- ⑤ Guide bushing
- ⑥ Reverse gear lock spring (free length 25.7 mm, 1.012 in.)
- ⑦ Retaining plug
- ⑧ Interlock pin
- ⑨ Shift rod for 1st and 2nd gear
- ⑩ Interlock pin
- ⑪ Shift rod for 3rd and 4th gear
- ⑫ Bore for 3rd and 4th gear interlock
- ⑬ Lock spring for 3rd and 4th gear (free length 23.2 mm, .913 in.)
- ⑭ Spacer plug