

Modified anchorage parts for safety belts

Shackle 644,803,111,02 is being replaced by retaining bolt 644,803,122,00.

(However shackle 644,803,111,02 is still being used for subsequent installation into vehicles without anchorage points.)

Retaining bolt 644,803,122,00 can be installed into all vehicles as of serial No.

Coupe 120 620

and/or 210 931

Cabriolet 156 850

Mounting retaining bolt:

Remove countersunk screw in A-A and screw in retaining bolt with spacer tube (see sketches).

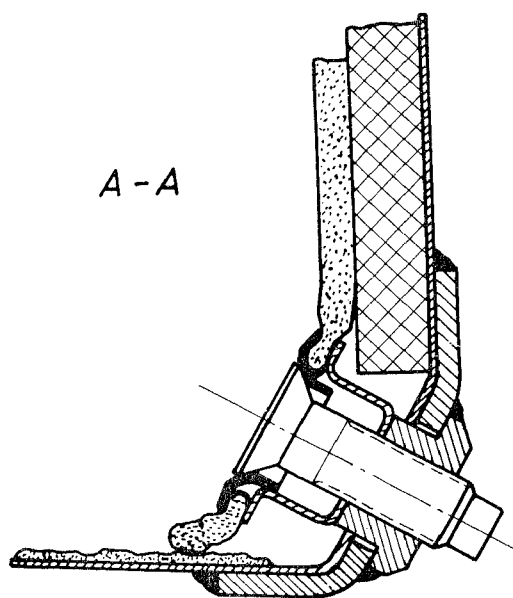


Fig. 7

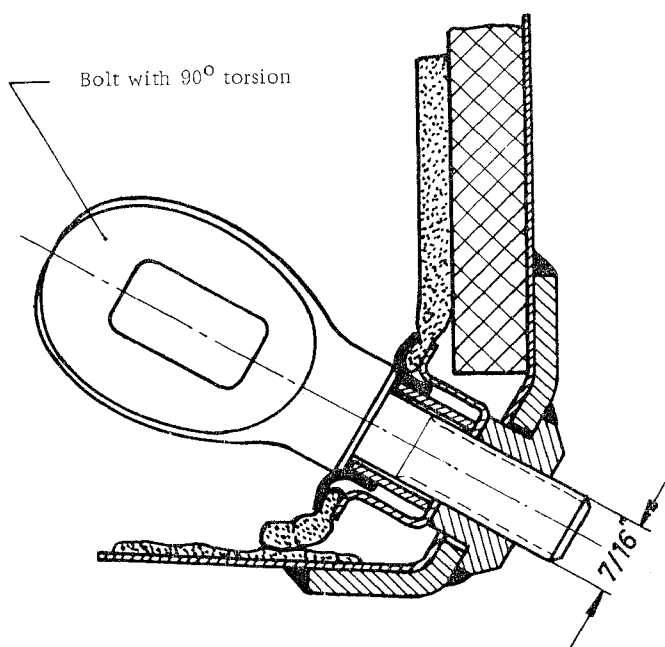


Fig. 8