

# Bumpers

7 B0

## Removing and Installing Front Bumper

### Removal

1. Remove the two bolts holding the bumper braces to the body and pull the bumper free from the car.

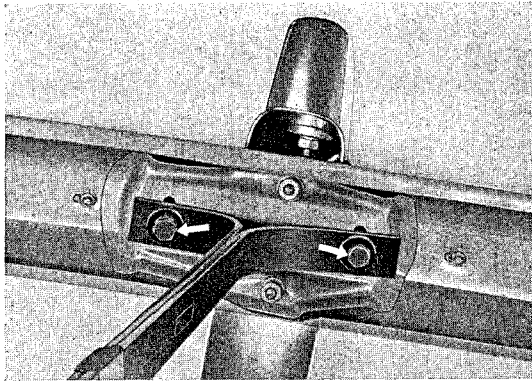


Fig. 19

2. Remove the two bolts holding the bumper braces to the bumper.

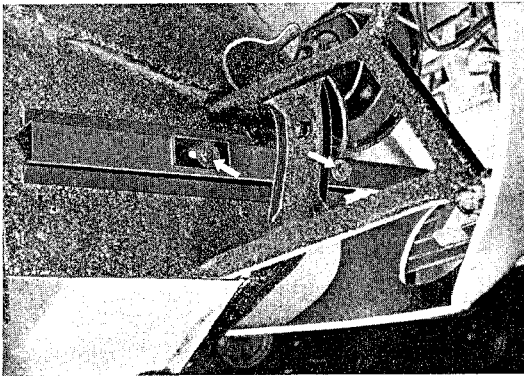


Fig. 20

3. Remove two M 8 nuts to remove the bumper guards.

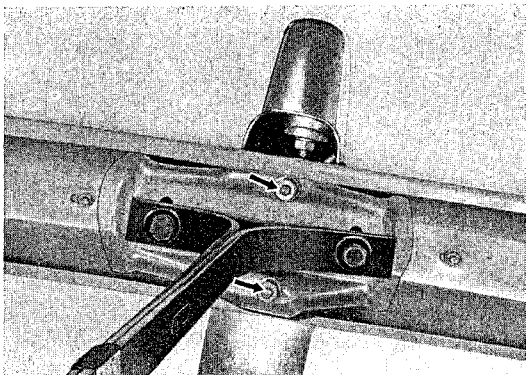


Fig. 21

4. To remove the moulding from the bumper, remove the nuts from the inside of the bumper. In the event that the screws turn, pull out the plastic center strip and hold the heads.

### Installation

The installation is accomplished in the reverse order of removal observing the following points:

1. If a new moulding is installed it is necessary to trim the plastic edging so that it will fit around the curve at each end. Cut "V" shaped sections into the flat portion covered by the moulding to allow bending.

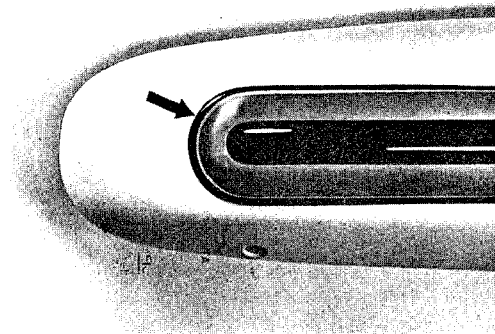


Fig. 22

2. Fit the correct plastic strips under the bumper guards.

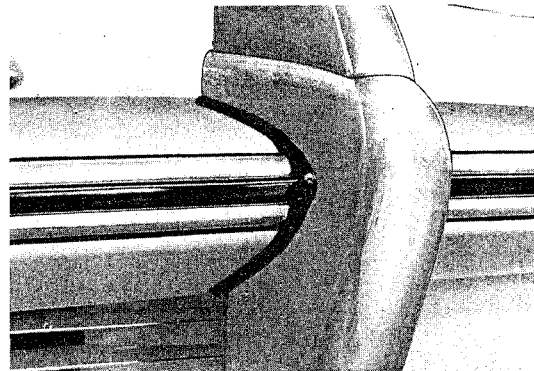


Fig. 23

3. Mount the bumper guards before installing the bumper.