

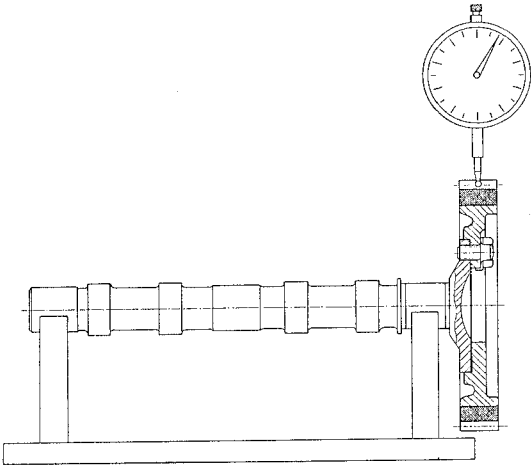

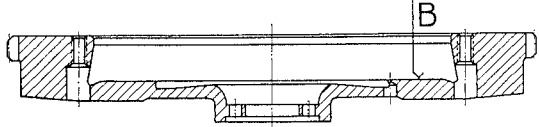


Measuring point	Tolerance (new) mm	Wear limit mm	
22. Timing gear bolted and pinned to camshaft wobble	max. 0.100	—	
Tooth clearance	0.015—0.040	—	
Timing gear bolted and pinned to camshaft eccentricity	0.025	0.040	
23. Flywheel (measured at rim) wobble A	max. 0.300	—	
(measured on clutch surface) wobble B	max. 0.040	—	
(measured at rim) eccentricity C	max. 0.20	—	