

Removing and Installing Door Lock

14 80

Removal

1. Remove door panel (10 BO).
2. Remove window (11 BO).
3. Remove window frame. Only the one window rail on the Roadster (13 BO).
4. Remove set screw from door lever and pull out release cable.
5. Remove door lever mounting screws and remove lever assembly.

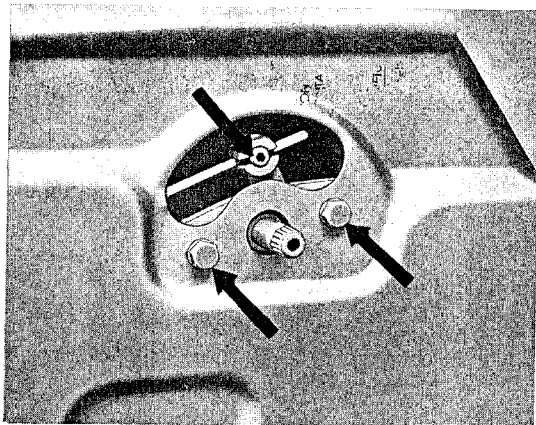


Fig. 64

6. Remove the four mounting screws from the door lock.

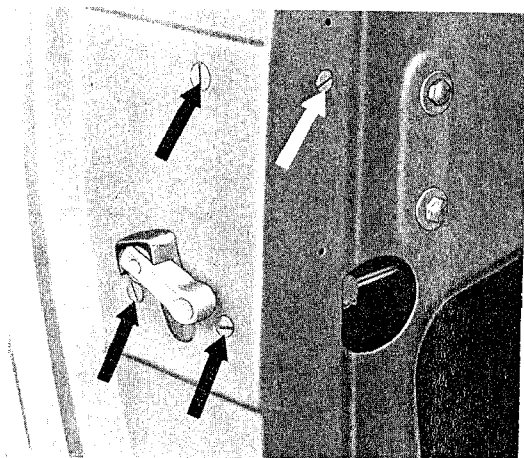


Fig. 65

7. Remove the door lock from the door.

Installation

The installation is accomplished in the reverse order of removal observing the following points:

1. Inspect the lock for worn parts and weak springs replacing parts as necessary.
2. Clean all parts and grease the moving parts.
3. Adjust the door striker so that the door surface fits flush with the car body.

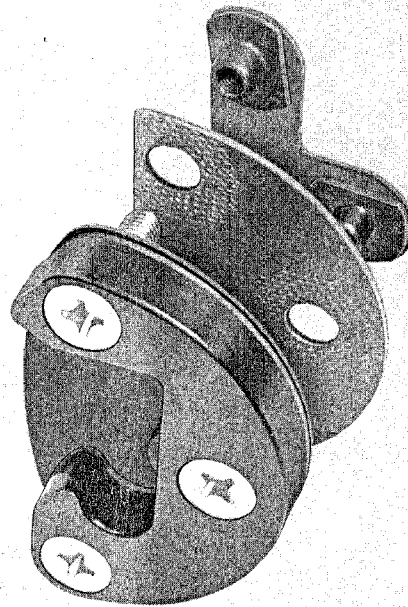


Fig. 66