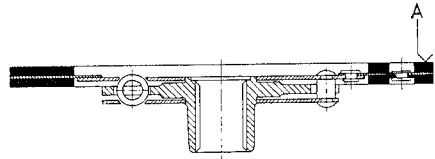
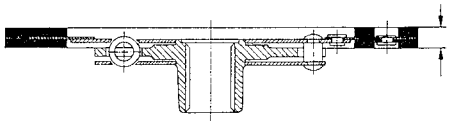
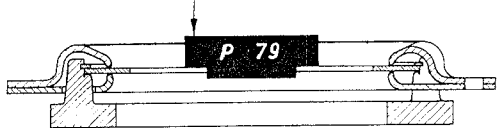



CLUTCH

Measuring point		Tolerance (new) mm	Wear limit mm	
1. Clutch plate	wobble A	max. 0.5	—	
2. Clutch plate with linings compressed	thickness	8.2–8.6	7.5	
3. Clutch pedal free travel		20–25	—	—
4. Clutch mounted on stand VW 254, gauge ring P 79 installed.	wobble	0.8	1.2	
5. Clutch mounted on stand VW 254, gauge ring P 79 installed. Height of top of gauge ring over mount- ing surface.		26–1.5	26 + 1.5	
6. Complete clutch assembly out of balance		max. 15 cmg	—	—