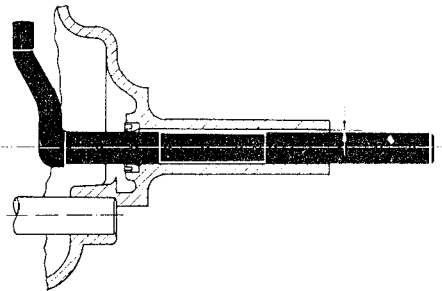
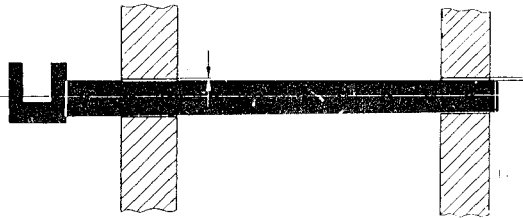
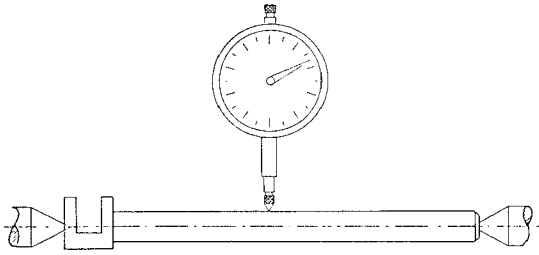



Measuring Point	Tolerance (new) mm	Wear limit mm	
5. Selector rod in transmission cover, end play	0.095—0.140	0.3	
6. a) Selector rod clearance in guide bores of intermediate plate and gearbox housing for 1st and 2nd gear, 3rd and 4th gear, and reverse gear	0.095—0.156	0.4	
b) Selector rods for 1st and 2nd gear, 3rd and 4th gear, and reverse gear run-out	—	0.10	
7. Selector rod lock spring 1st and 2nd gear 3rd and 4th gear load at 21.5 mm free length reverse gear load at 21.9 mm free length	3.3 kg 23.2 mm  6.5 kg 25.7 mm		
8. Selector fork lateral clearance in sliding sleeve 1st and 2nd gear 3rd and 4th gear	0.10—0.30	0.5	