

Subsequent installation of anchorage parts for safety belts

In vehicles as of type 356 A

Coupe 101 693

Cabriolet 150 001

Speedster 83 792

a subsequent installation of anchorage parts for air-line safety belts, diagonal shoulder safety belts or combined diagonal-plus-lap safety belts is possible.

As anchorage parts are used: shackles, spare part No. 644.803.111.02; with nuts M 8x1 DIN 934-6S gal Zn 9, spare part No. 900.076.014.02, 4 each; and spring washers B 8 DIN 137 bost., spare part No. 900.028.010.01, 2 each; and/or spring rings 8 DIN 7980 bost., spare part No. 900.142.002.01, 2 each. The shackles are screwed on to the vertical sheeting by means of a reinforcement plate from the outside. The same shackles are used for the fastening of diagonal shoulder safety belts to the rear side-wall of the car's interior. To obtain the necessary rigidity, two reinforcement plates for each shackle have to be made (as per sketch), and mounted as described.

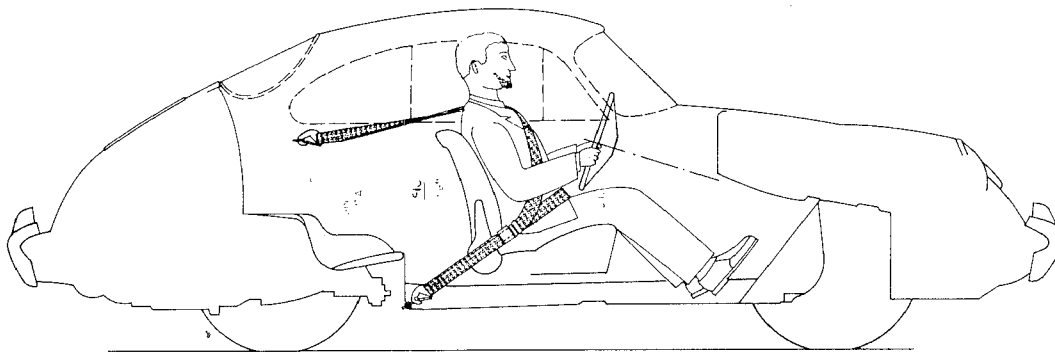


Fig. 1

Mounting of anchorage parts for diagonal shoulder safety belts in the rear of the car's interior

Operation

1. Make reinforcement plates (as per sketch) to fasten the shackles to the side-wall in the rear of the car's interior (see Fig. 2).
2. Remove coverstrip and/or lateral covering in the rear of the Cabriolet.

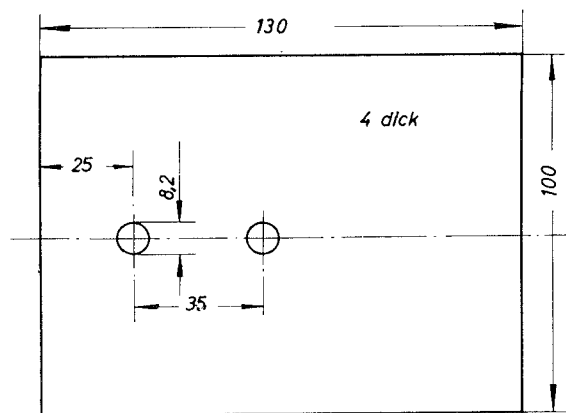


Fig. 2