

Removing and Installing Folding Back Rests

Removal

1. Remove the two screws at the rear of the mat covering the back of the seat.
3. Remove both hinge screws noting the position of the washers.

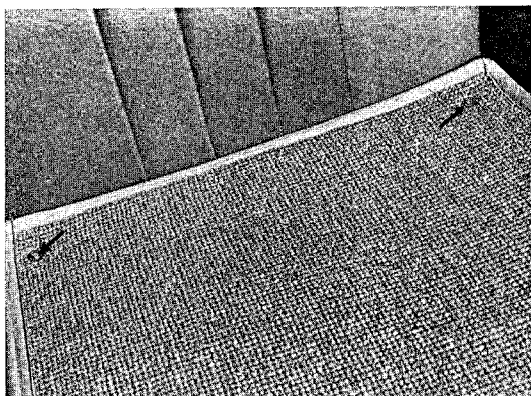


Fig. 89

2. Raise the back rest.

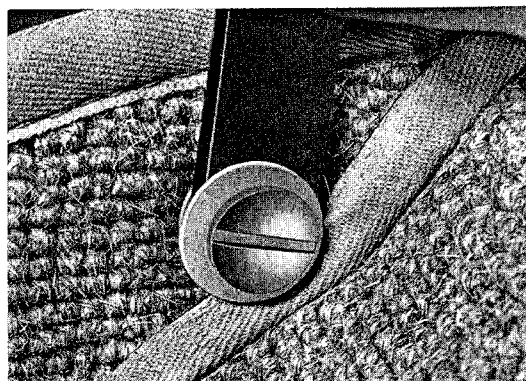


Fig. 90

4. Remove back rest.

Installation

5. The installation is accomplished in the reverse order of removal.