

TRAILER HITCH

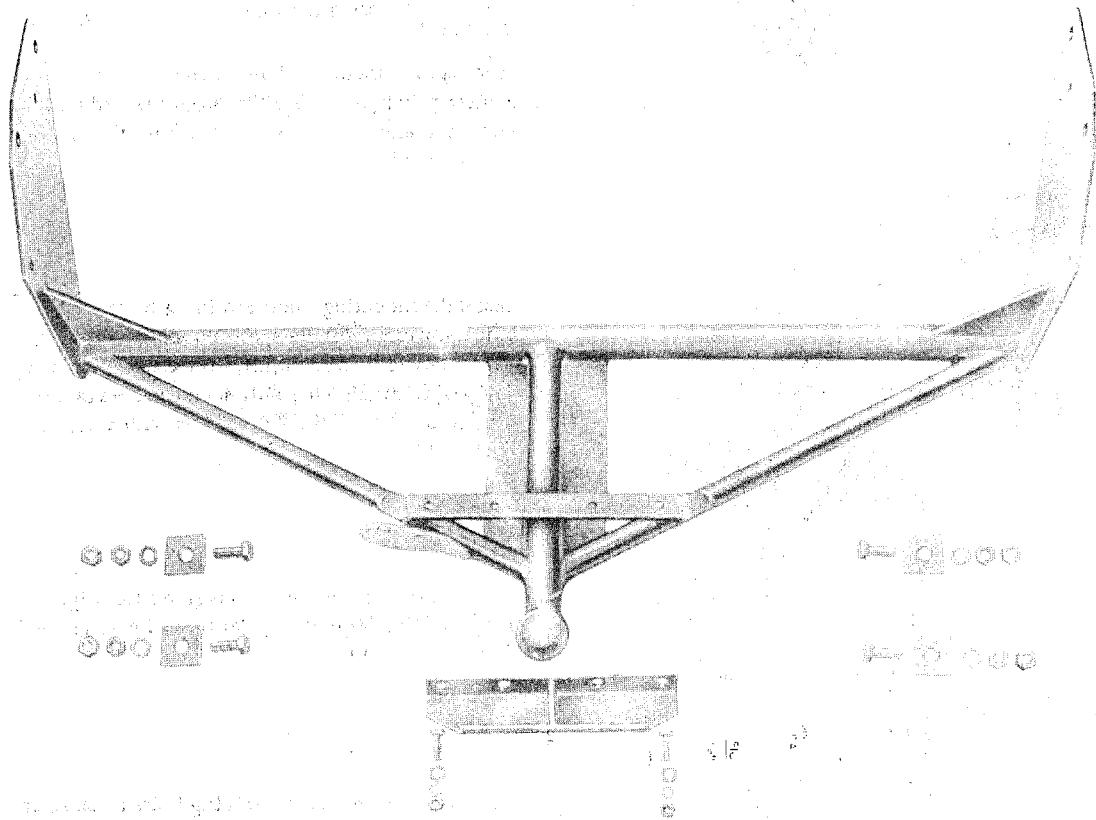


Fig. 1

Installation

1. Loosen bumper bracket retaining bolts at body and bumper.
2. Pull bumper back by about 1/2 inch and detach cable for license plate illumination.
3. Withdraw bumper, together with brackets, from the body.
4. Scrape off undercoating in the areas to be covered by the hitch mounting plate and, on the engine side, where washers will fit, in order to provide a clean, metallic base for mounting.
5. Slide the trailer hitch assembly into place and secure with bumper bracket retaining screws (see Fig. 2 and 3).