

4. Using a 10 mm socket, remove two cap screws from front edge of window frame.

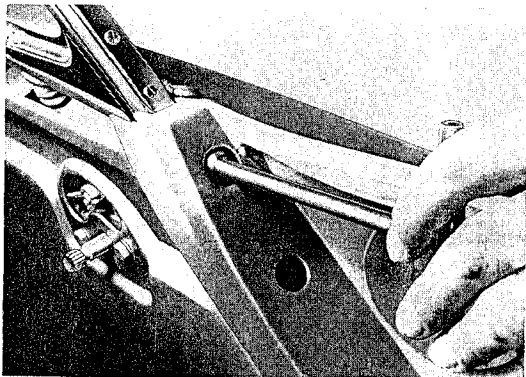


Fig. 53

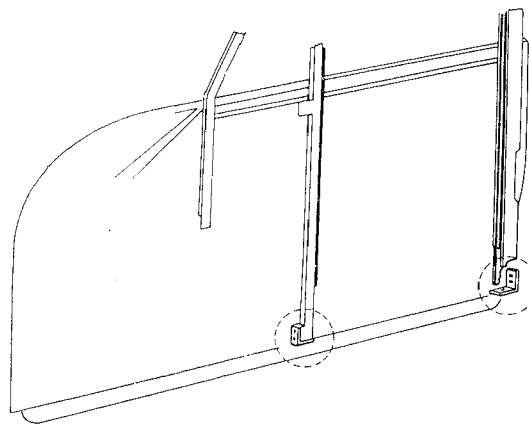


Fig. 55

7. Remove window frame and rails from the door.

5. Remove two cap screws from the inside of the door indicated by arrows in Fig. 54.

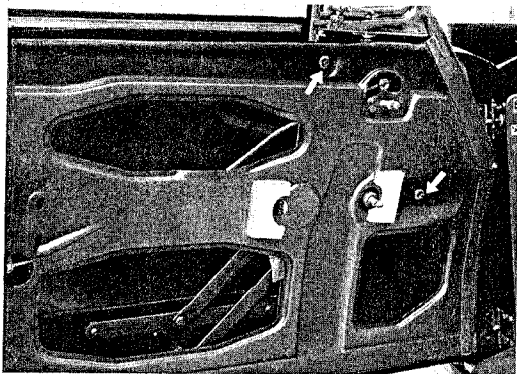


Fig. 54

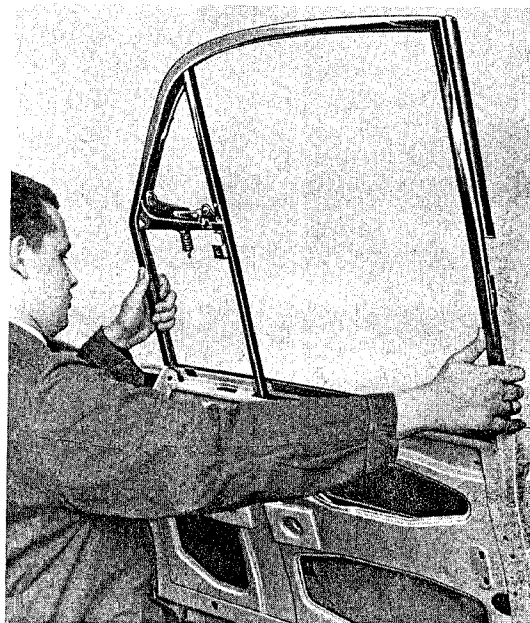


Fig. 56

6. Remove the screws from the window rail in the bottom of the door frame if they have not already been disconnected.

Installation

The installation is accomplished in the reverse order of removal observing the condition of the weather strip and felt linings in the window rails replacing where necessary.