

6. Remove the two allen head screws located at the extreme left and right lower edges of the instrument panel. These screws thread directly into the windshield posts.

7. Lift out windshield with frame.

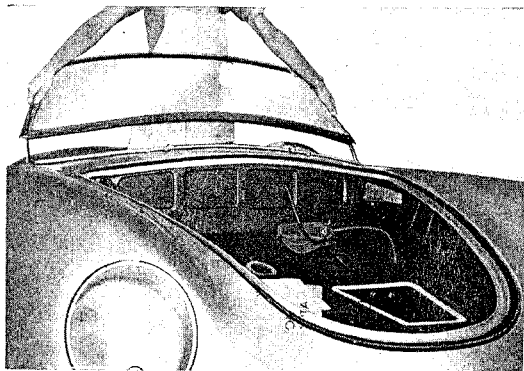


Fig. 78

8. Remove lower rubber strip.
9. Remove windshield from frame.

- a. Slot for glass.




Fig. 79

3. Install windshield in frame and secure with two cords.

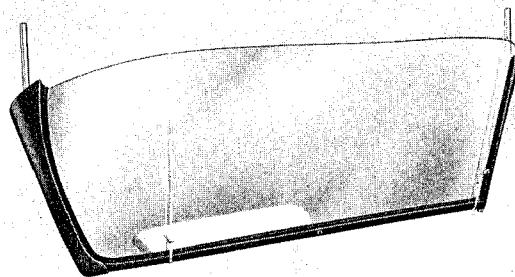


Fig. 80

4. Seal rubber with special rubber cement around edges.

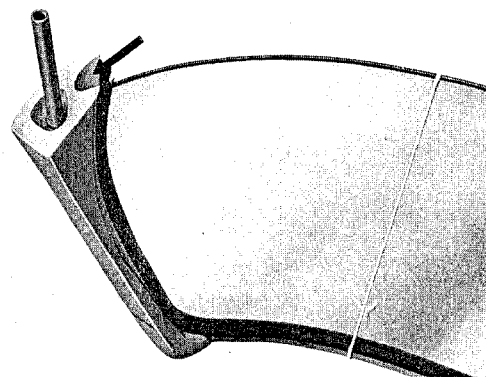


Fig. 81

Installation

1. In the case of a new windshield, compare the shape of the glass and the frame. If there are differences, the glass must be reworked to match the frame.

2. Fit rubber strip to the windshield.

5. Install lower rubber strip.