

Fig. 151

5. Push first two bows close together, moving front frame rearward.

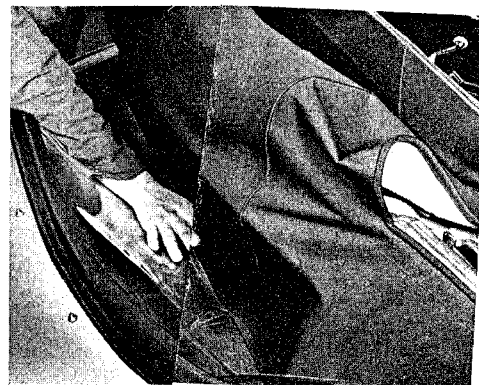


Fig. 154

7. Push the folded top down into the rear compartment.



Fig. 152

6. Press the rear section and window inward, smoothing wrinkles which tend to form.



Fig. 155

8. Cover the top with the top boot, fastening it tightly the ball snaps furnished for this purpose.

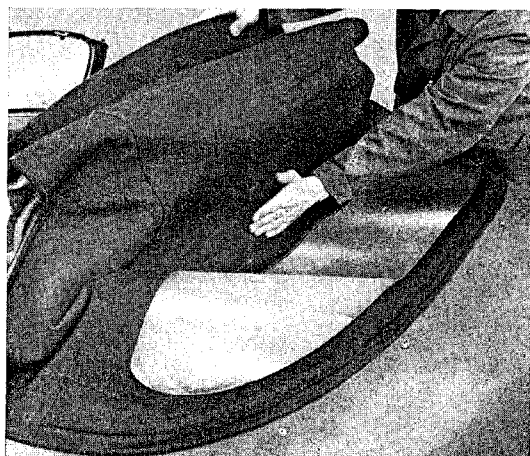


Fig. 153

#### Note:

Before lowering the convertible top, it should be cleaned with a stiff brush. The plastic window should be cleaned with a soft wet rag or sponge. A convertible which is lowered in a dirty condition will soon be scratched. The top should never be lowered when wet. When the car is in a closed garage with a wet top the windows should be opened to allow better ventilation.