

**ARM**

**Assembly Language  
and  
Machine Code**


**Goal: Blink an LED**

# Memory Map

Peripheral registers  
are mapped  
into address space

Memory-Mapped IO  
(MMIO)

MMIO space is above  
physical memory

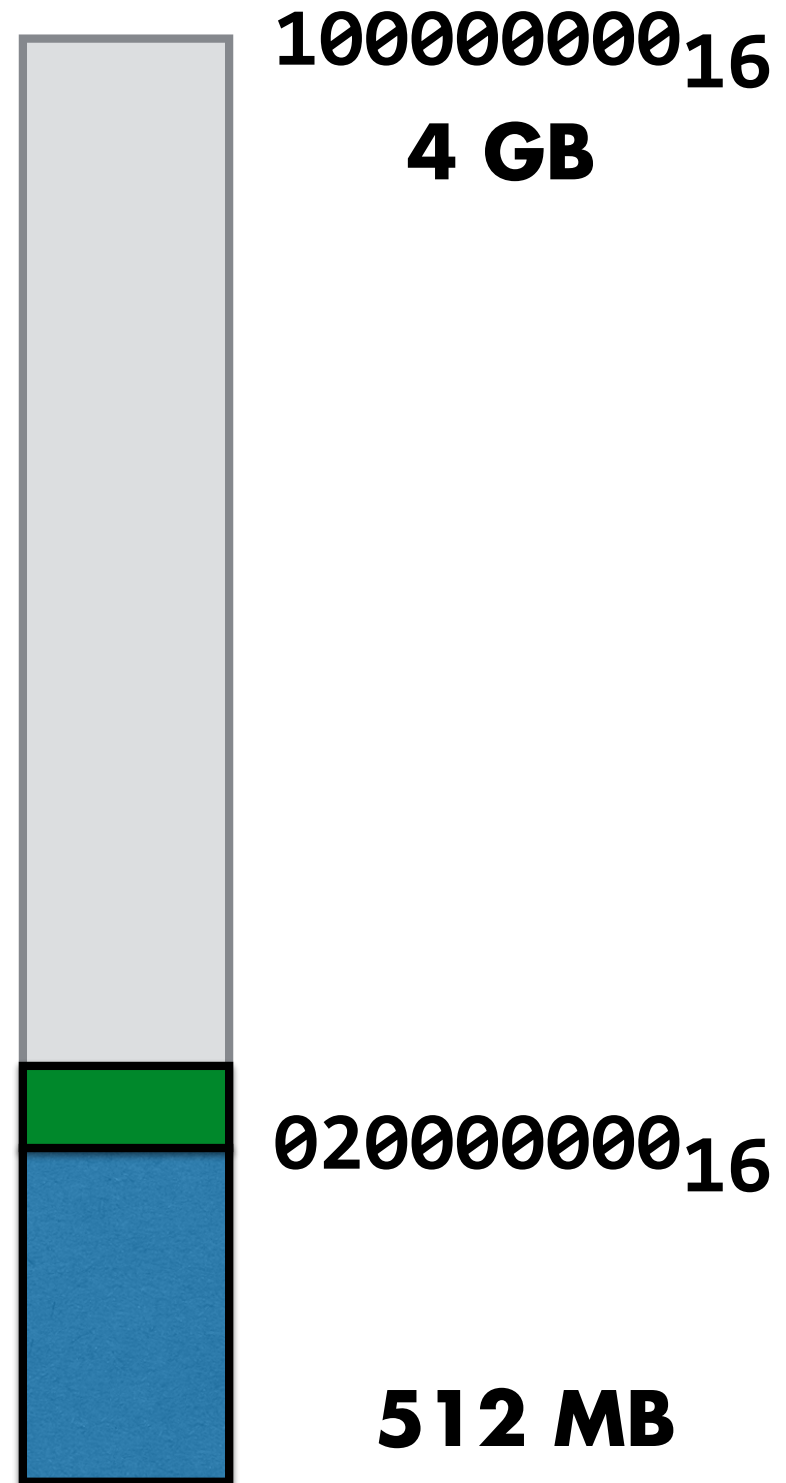

**// Configure GPIO20 as an OUTPUT**

**// FSEL2 = 0x20200008**

**mov r0, #0x20000000**

**orr r0, #0x00200000**

**orr r0, #0x00000008**

**mov r1, #1      // 1 indicates OUTPUT**

**str r1, [r0]    // store 1 to 0x20200008**


# General-Purpose IO Function

**GPIO Pins can be configured to be INPUT, OUTPUT, or ALT0-ALT5**

Bit pattern	Pin Function
000	The pin in an input
001	The pin is an output
100	The pin does alternate function 0
101	The pin does alternate function 1
110	The pin does alternate function 2
111	The pin does alternate function 3
011	The pin does alternate function 4
010	The pin does alternate function 5

**3 bits required to select function**

# GPIO Function Select Register

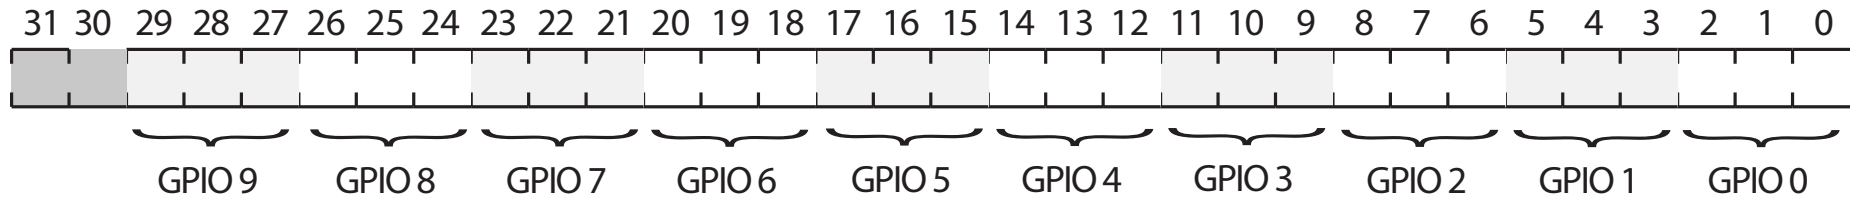

**Function is INPUT, OUTPUT, or ALT0-ALT5**

**8 functions requires 3 bits to specify**

**10 pins per 32-bit register (2 wasted bits)**

**54 GPIOs pins requires 6 registers**

# GPIO Function Select Registers Addresses

Address	Field Name	Description	Size	Read/Write
0x 7E20 0000	GPFSEL0	GPIO Function Select 0	32	R/W
0x 7E20 0000	GPFSEL0	GPIO Function Select 0	32	R/W
0x 7E20 0004	GPFSEL1	GPIO Function Select 1	32	R/W
0x 7E20 0008	GPFSEL2	GPIO Function Select 2	32	R/W
0x 7E20 000C	GPFSEL3	GPIO Function Select 3	32	R/W
0x 7E20 0010	GPFSEL4	GPIO Function Select 4	32	R/W
0x 7E20 0014	GPFSEL5	GPIO Function Select 5	32	R/W
0x 7E20 0018	-	Reserved	-	-

Watch out for ...

Manual says: 0x7E200000

Replace 7E with 20: 0x20200000


Ref: BCM2835-ARM-Peripherals.pdf

```
...  
// "set" GPIO20 (output 1 = 3.3V)  
  
// SET0 = 0x2020001c  
mov r0, #0x20000000  
orr r0, #0x00200000  
orr r0, #0x0000001c  
mov r1, #1  
lsl r1, #20 // bit 20 = 1<<20  
str r1, [r0] // store 1<<20 to 0x2020001c
```

# GPIO Function SET Register

**20 20 00 1C : GPIO SET0 Register**

**20 20 00 20 : GPIO SET1 Register**

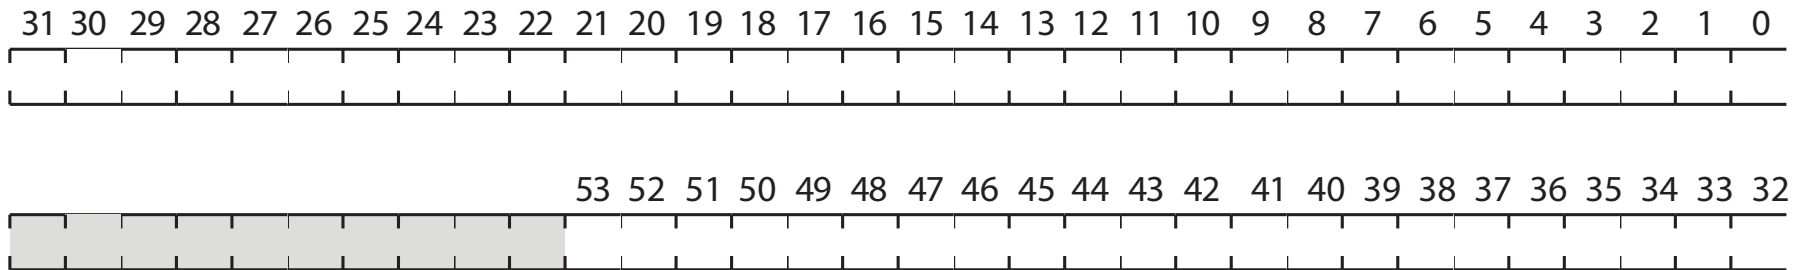

## Notes

- 1. 1 bit per GPIO pin**
- 2. 54 pins requires 2 registers**



## GPIO Pin Output Set Registers (GPSETn)

### SYNOPSIS


The output set registers are used to set a GPIO pin. The SET{n} field defines the respective GPIO pin to set, writing a “0” to the field has no effect. If the GPIO pin is being used as in input (by default) then the value in the SET{n} field is ignored. However, if the pin is subsequently defined as an output then the bit will be set according to the last set/clear operation. Separating the set and clear functions removes the need for read-modify-write operations

Bit(s)	Field Name	Description	Type	Reset
31-0	SETn (n=0..31)	0 = No effect 1 = Set GPIO pin <i>n</i>	R/W	0

**Table 6-8 – GPIO Output Set Register 0**

Bit(s)	Field Name	Description	Type	Reset
31-22	-	Reserved	R	0
21-0	SETn (n=32..53)	0 = No effect 1 = Set GPIO pin <i>n</i> .	R/W	0

**Table 6-9 – GPIO Output Set Register 1**

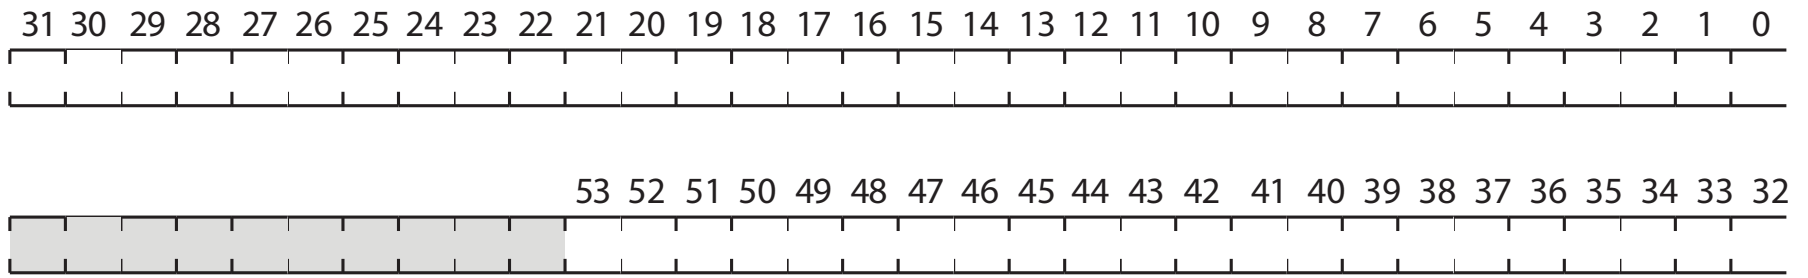

```
ldr r0, SET0
```

```
ldr r1, #(1<<20)
```

```
ldr r1, #(1<<21)
```


```
// Is the LED connected to GPIO20 on?
```

```
// Is the LED connected to GPIO21 on?
```

# **3 Types of Instructions**

- 1. Data processing instructions**
- 2. Loads from and stores to memory**
- 3. Conditional branches to new program locations**

# **Data Processing Instructions**

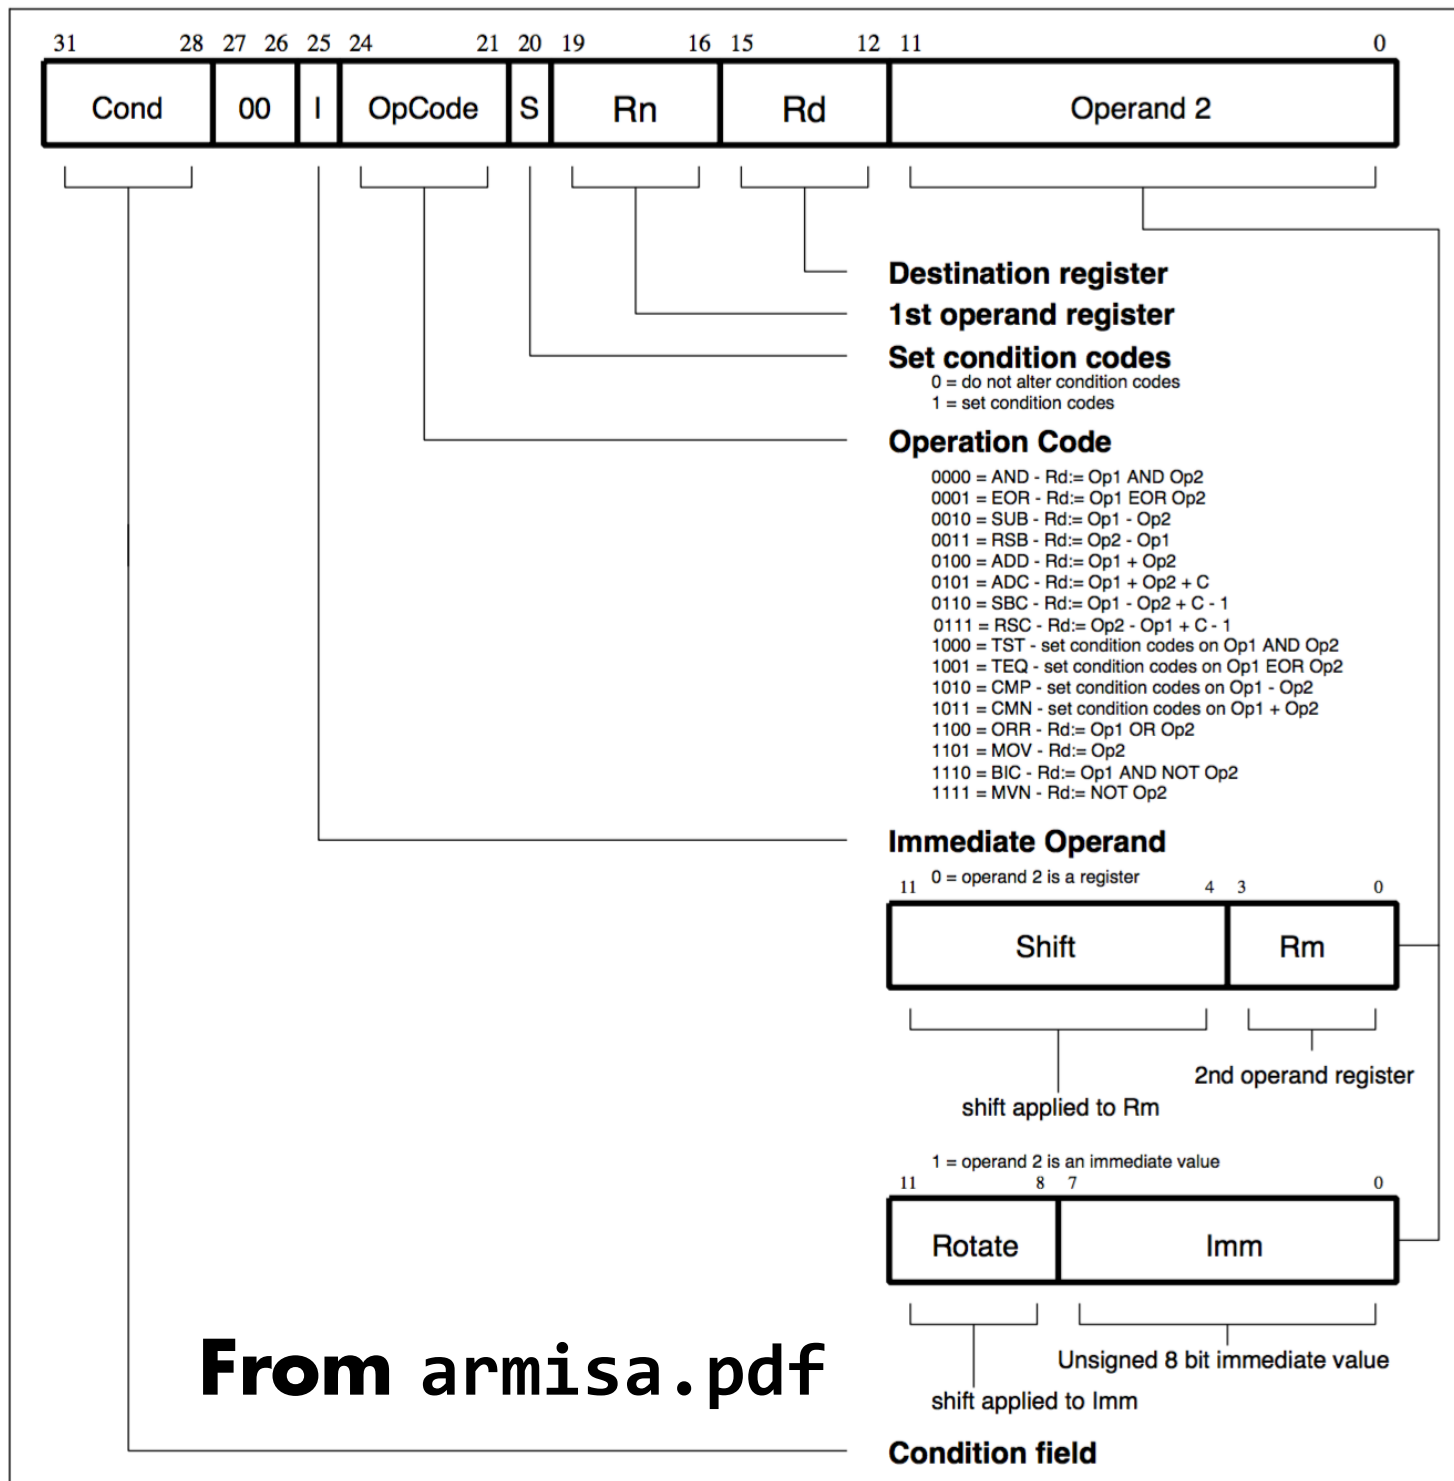

**Figure 4-4: Data processing instructions**

# data processing instruction

#

# ra = rb op rc

## Immediate mode instruction

### Set condition codes

1110 00 i op s rb ra rc  
0000 bbbb aaaa cccc cccc cccc

Data processing instruction

Always execute the instruction

Assembly	Code	Operations
AND	0000	$ra = rb \& rc$
EOR (XOR)	0001	$ra = rb \wedge rc$
SUB	0010	$ra = rb - rc$
RSB	0011	$ra = rc - rb$
ADD	0100	$ra = rb + rc$
ADC	0101	$ra = rb + rc + \text{CARRY}$
SBC	0110	$ra = rb - rc + (1 - \text{CARRY})$
RSC	0111	$ra = rc - rb + (1 - \text{CARRY})$
TST	1000	$rb \& rc$ (ra not set)
TEQ	1001	$rb \wedge rc$ (ra not set)
CMP	1010	$rb - rc$ (ra not set)
CMN	1011	$rb + rc$ (ra not set)
ORR (OR)	1100	$ra = rb \mid rc$
MOV	1101	$ra = rc$
BIC	1110	$ra = rb \& \sim rc$
MVN	1111	$ra = \sim rc$

# data processing instruction

# ra = rb op rc


#

			op		rb	ra	rc		
1110	00	i	oooo	s	bbbb	aaaa	cccc	cccc	cccc

			add		r1	r0			
1110	00	i	0100	s	0001	0000	cccc	cccc	cccc



**add r0, r1, #1**

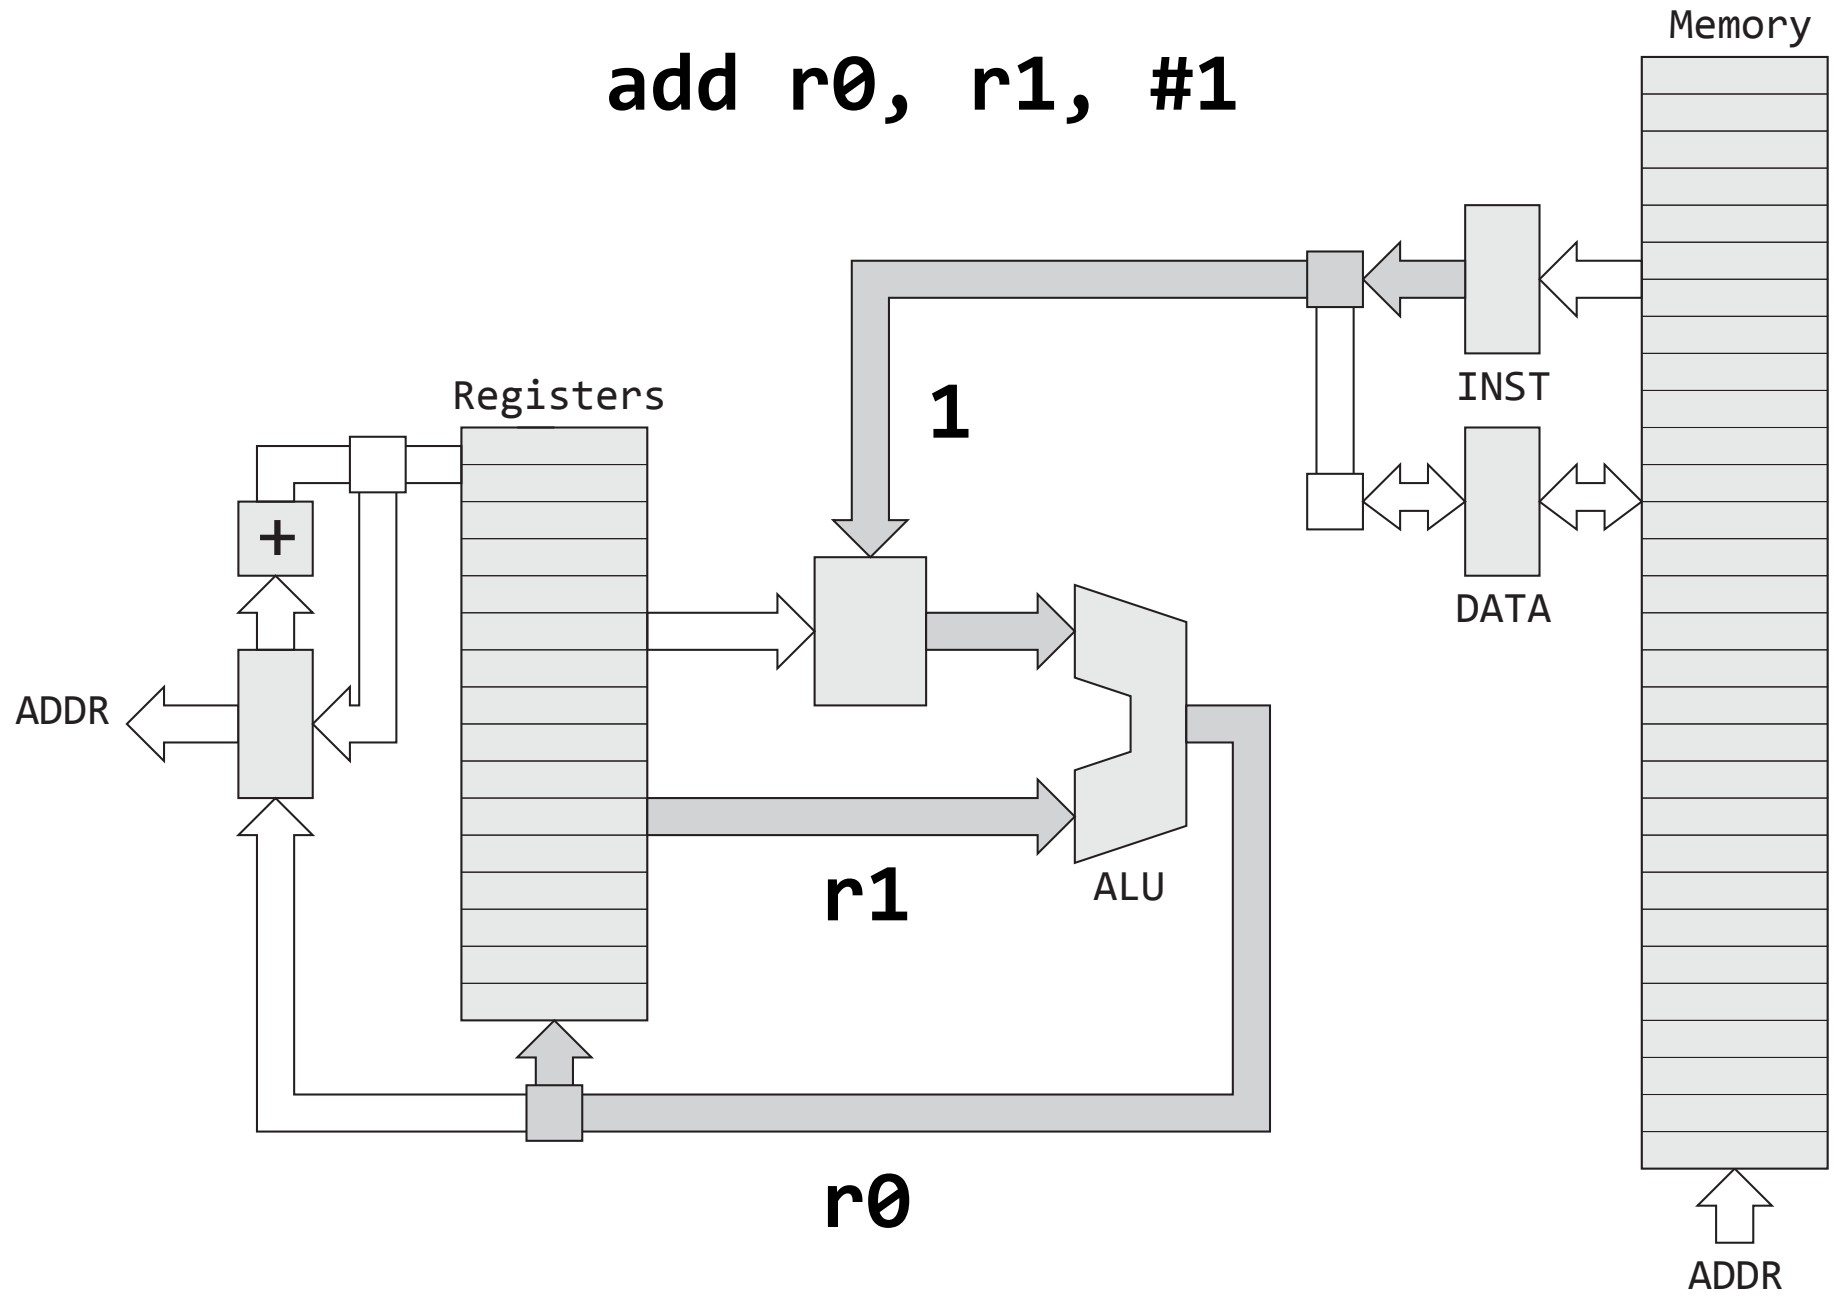

```
# data processing instruction
#  ra = rb op #imm
#  #imm = uuuu uuuu
```

			add		r1		r0		imm
1110	00	1	0100	0	0001	0000	0000	uuuu	uuuu

```
add r0, r1, #1
```

```
# i=1, s=0
```

```
#
```

```
# As in immediately available,
```

```
# i.e. no need to fetch from memory
```

# data processing instruction

# ra = rb op #imm

# #imm = uuuu uuuu

			add		r1	r0		imm
1110	00	1	0100	0	0001	0000	0000	uuuu uuuu

add r0, r1, #1

			add		r1	r0		#1
1110	00	1	0100	0	0001	0000	0000	0000 0001

# data processing instruction

# ra = rb op #imm

# #imm = uuuu uuuu


			add		r1	r0		imm
1110	00	1	0100	0	0001	0000	0000	uuuu uuuu

add r0, r1, #1

			add		r1	r0		#1
1110	00	1	0100	0	0001	0000	0000	0000 0001

1110	0010	1000	0001	0000	0000	0000	0001
E	2	8	1	0	0	0	1

**most-significant-byte (MSB)**

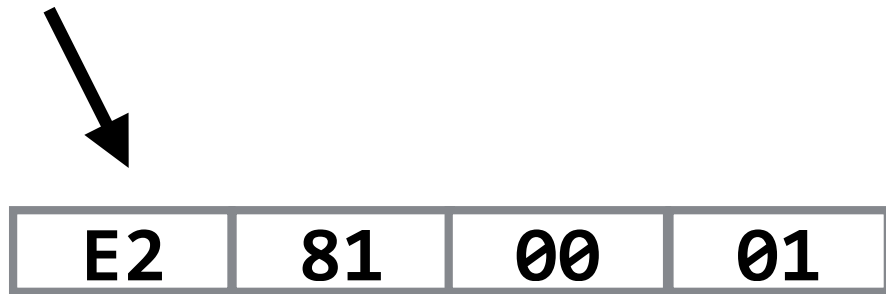


**least-significant-byte (LSB)**

ADDR+3

ADDR+2

ADDR+1


ADDR

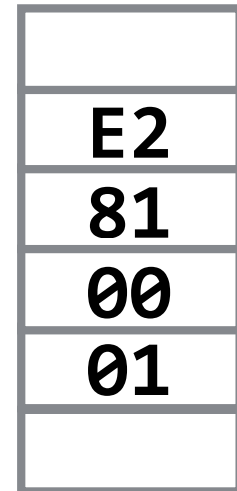

**little-endian  
(LSB first)**

**ARM uses little-endian**

**most-significant-byte (MSB)**

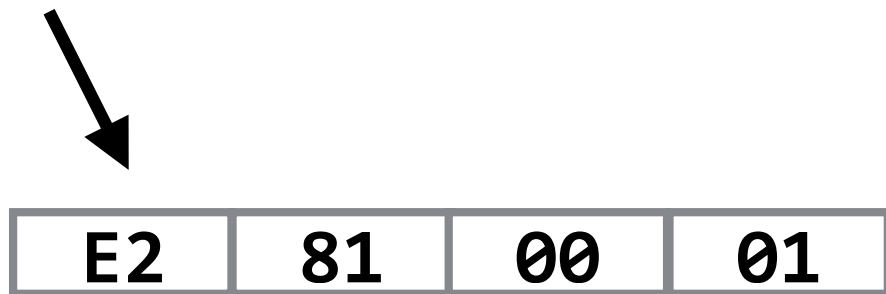


**least-significant-byte (LSB)**

ADDR+3


ADDR+2

ADDR+1

ADDR

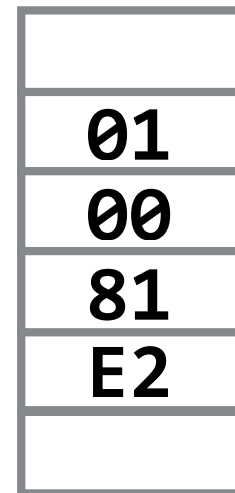


**big-endian  
(MSB first)**

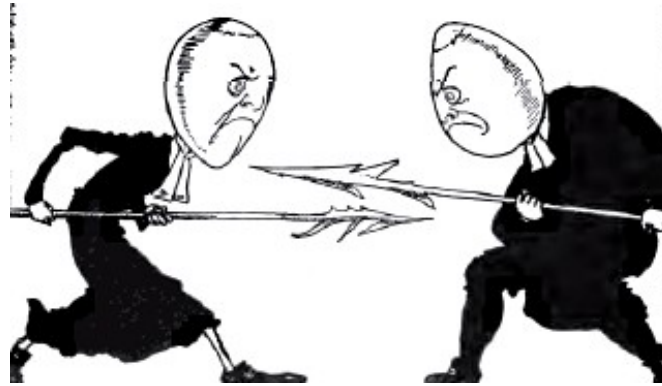

**The 'little-endian' and 'big-endian' terminology which is used to denote the two approaches [to addressing memory] is derived from Swift's Gulliver s Travels. The inhabitants of Lilliput, who are well known for being rather small, are, in addition, constrained by law to break their eggs only at the little end. When this law is imposed, those of their fellow citizens who prefer to break their eggs at the big end take exception to the new rule and civil war breaks out. The big-endians eventually take refuge on a nearby island, which is the kingdom of Blefuscu. The civil war results in many casualties.**

**Read: Holy Wars and a Plea For Peace, D. Cohen**

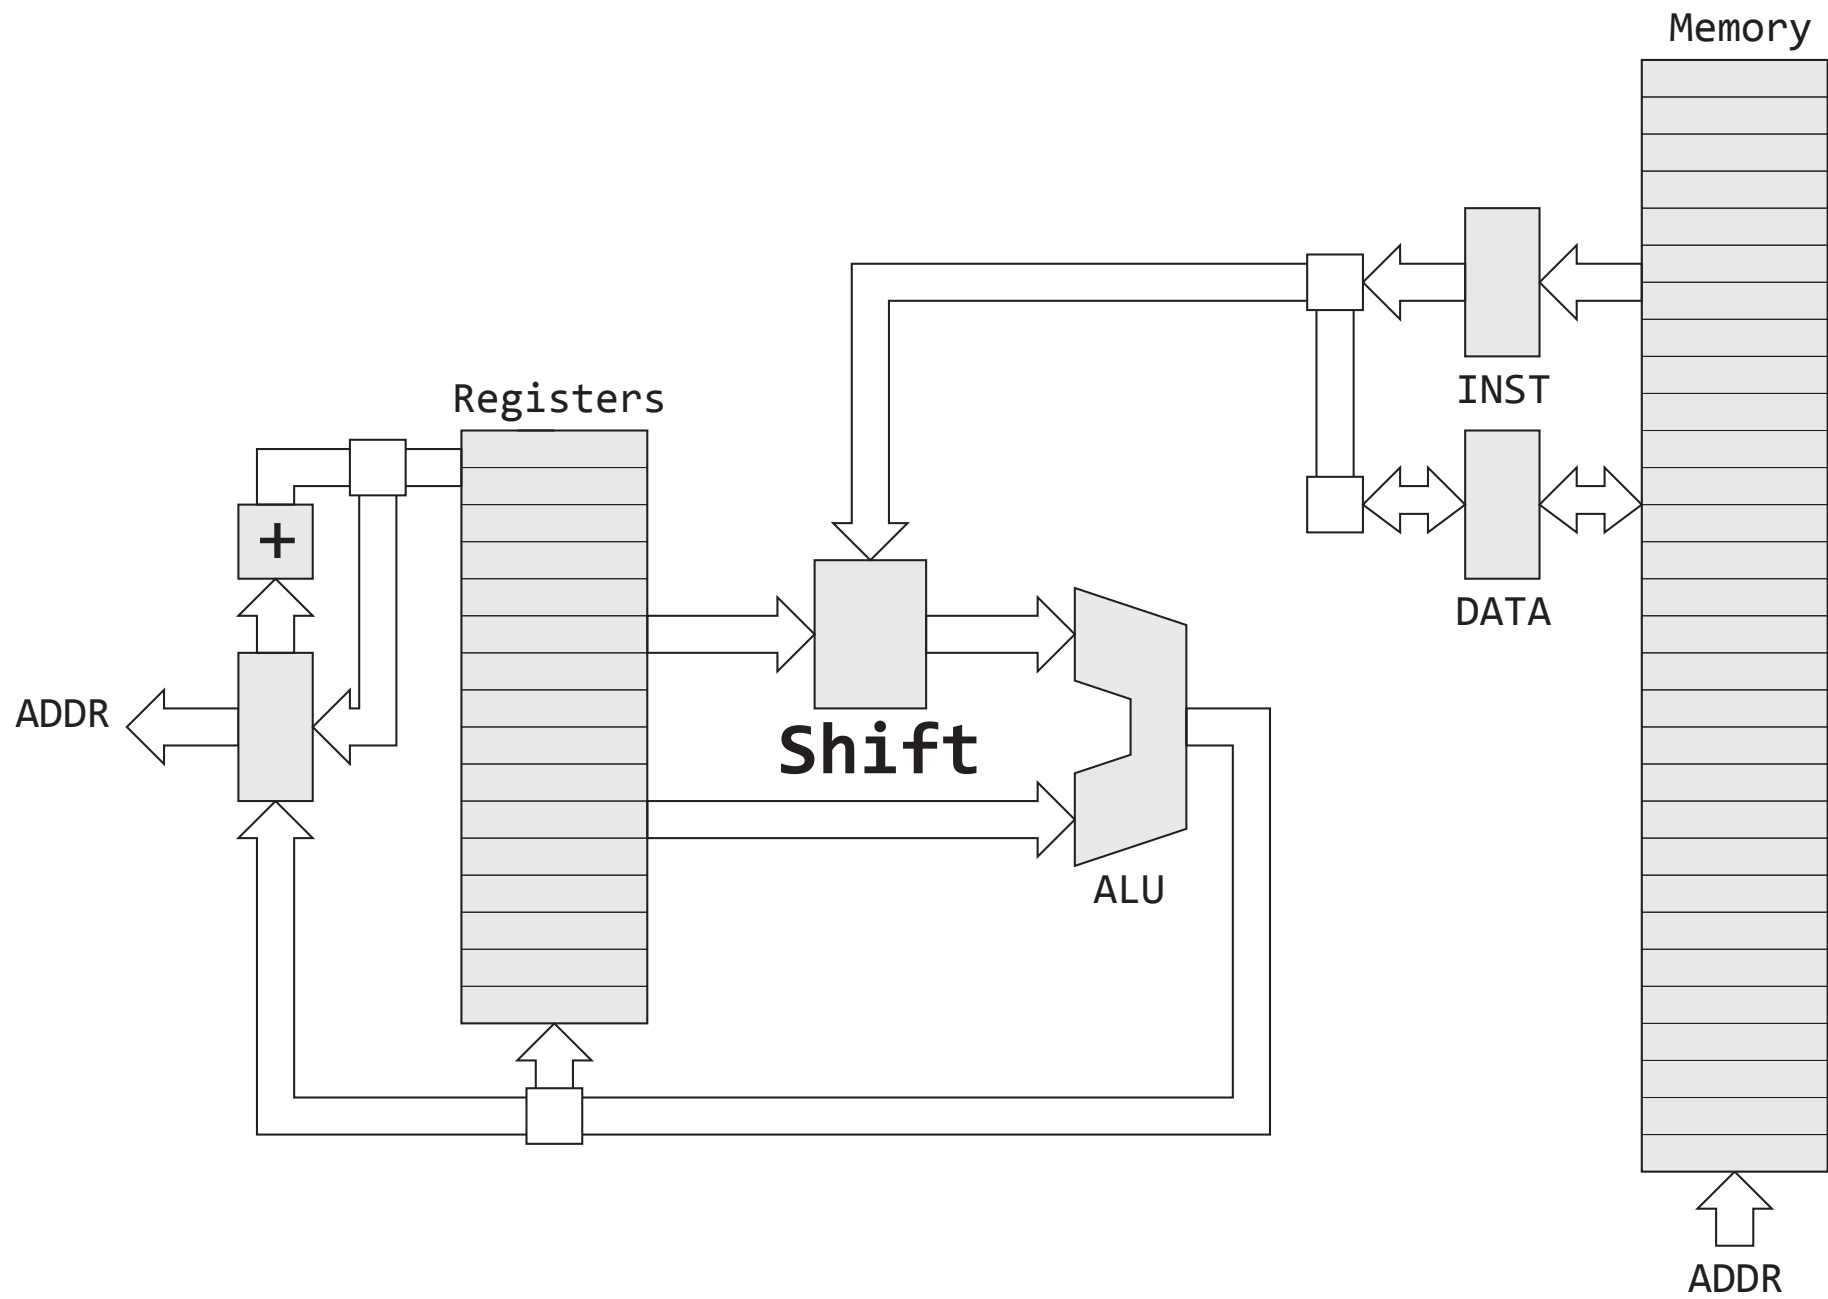



## Rotate Bits Right (ROR)

[illegible]

# data processing instruction  
# ra = rb op imm  
# imm = (uuuu uuuu) ROR (2\*rrrr)

			op		rb	ra	ror	imm
1110	00	1	oooo	0	bbbb	aaaa	rrrr	uuuu uuuu

```
# data processing instruction
#  ra = rb op imm
#  imm = (uuuu uuuu) ROR (2*rrrr)
```

			op		rb	ra	ror	imm
1110	00	1	oooo	0	bbbb	aaaa	rrrr	uuuu uuuu

```
add r0, r1, #0x10000
```

			add		r1	r0	0x01>>>2*8
1110	00	1	0100	0	0001	0000	1000 0000 0001

```
0x01>>16
```

0000	0000	0000	0000	0000	0000	0000	0001
0000	0000	0000	0001	0000	0000	0000	0000

...

```
// SET1 = 0x2020001c  
mov r0, #0x20000000 // 0x20>>>8  
orr r0, #0x00200000 // 0x20>>>16  
orr r0, #0x0000001c // 0x1c>>>0
```

```
# data processing instruction
# ra = rb op imm
# imm = (uuuu uuuu) ROR (2*iiii)
```

			op		rb	ra	ror	imm
1110	00	1	oooo	0	bbbb	aaaa	iiii	uuuu uuuu

```
add r0, r1, #0x10000
```

			add		r1	r0	0x01>>>2*8
1110	00	1	0100	0	0001	0000	1000 0000 0001

1110	0010	1000	0001	0000	1000	0000	0001
E	2	8	1	0	8	0	1

# Determine the machine code for

sub r7, r5, #0x300

# imm = (uuuu uuuu) ROR (2\*iiii)

# Remember that ra is the result

			op		rb		ra		ror		imm
1110	00	1	oooo	0	bbbb		aaaa		iiii	uuuu	uuuu

// What is the machine code?


```
# data processing instruction
#  ra = rb op imm
#  imm = uuuu uuuu ROR (2*iiii)
```

			op		rb	ra	ror
1110	00	1	oooo	0	bbbb	aaaa	iiii uuuu uuuu

```
sub r7, r5, #0x300
```


			sub		r5	r7	#0x03>>>24
1110	00	1	0010	0	0101	0111	1100 0000 0011

1110	0010	0100	0101	0111	1100	0000	0011
E	2	4	5	7	C	0	3

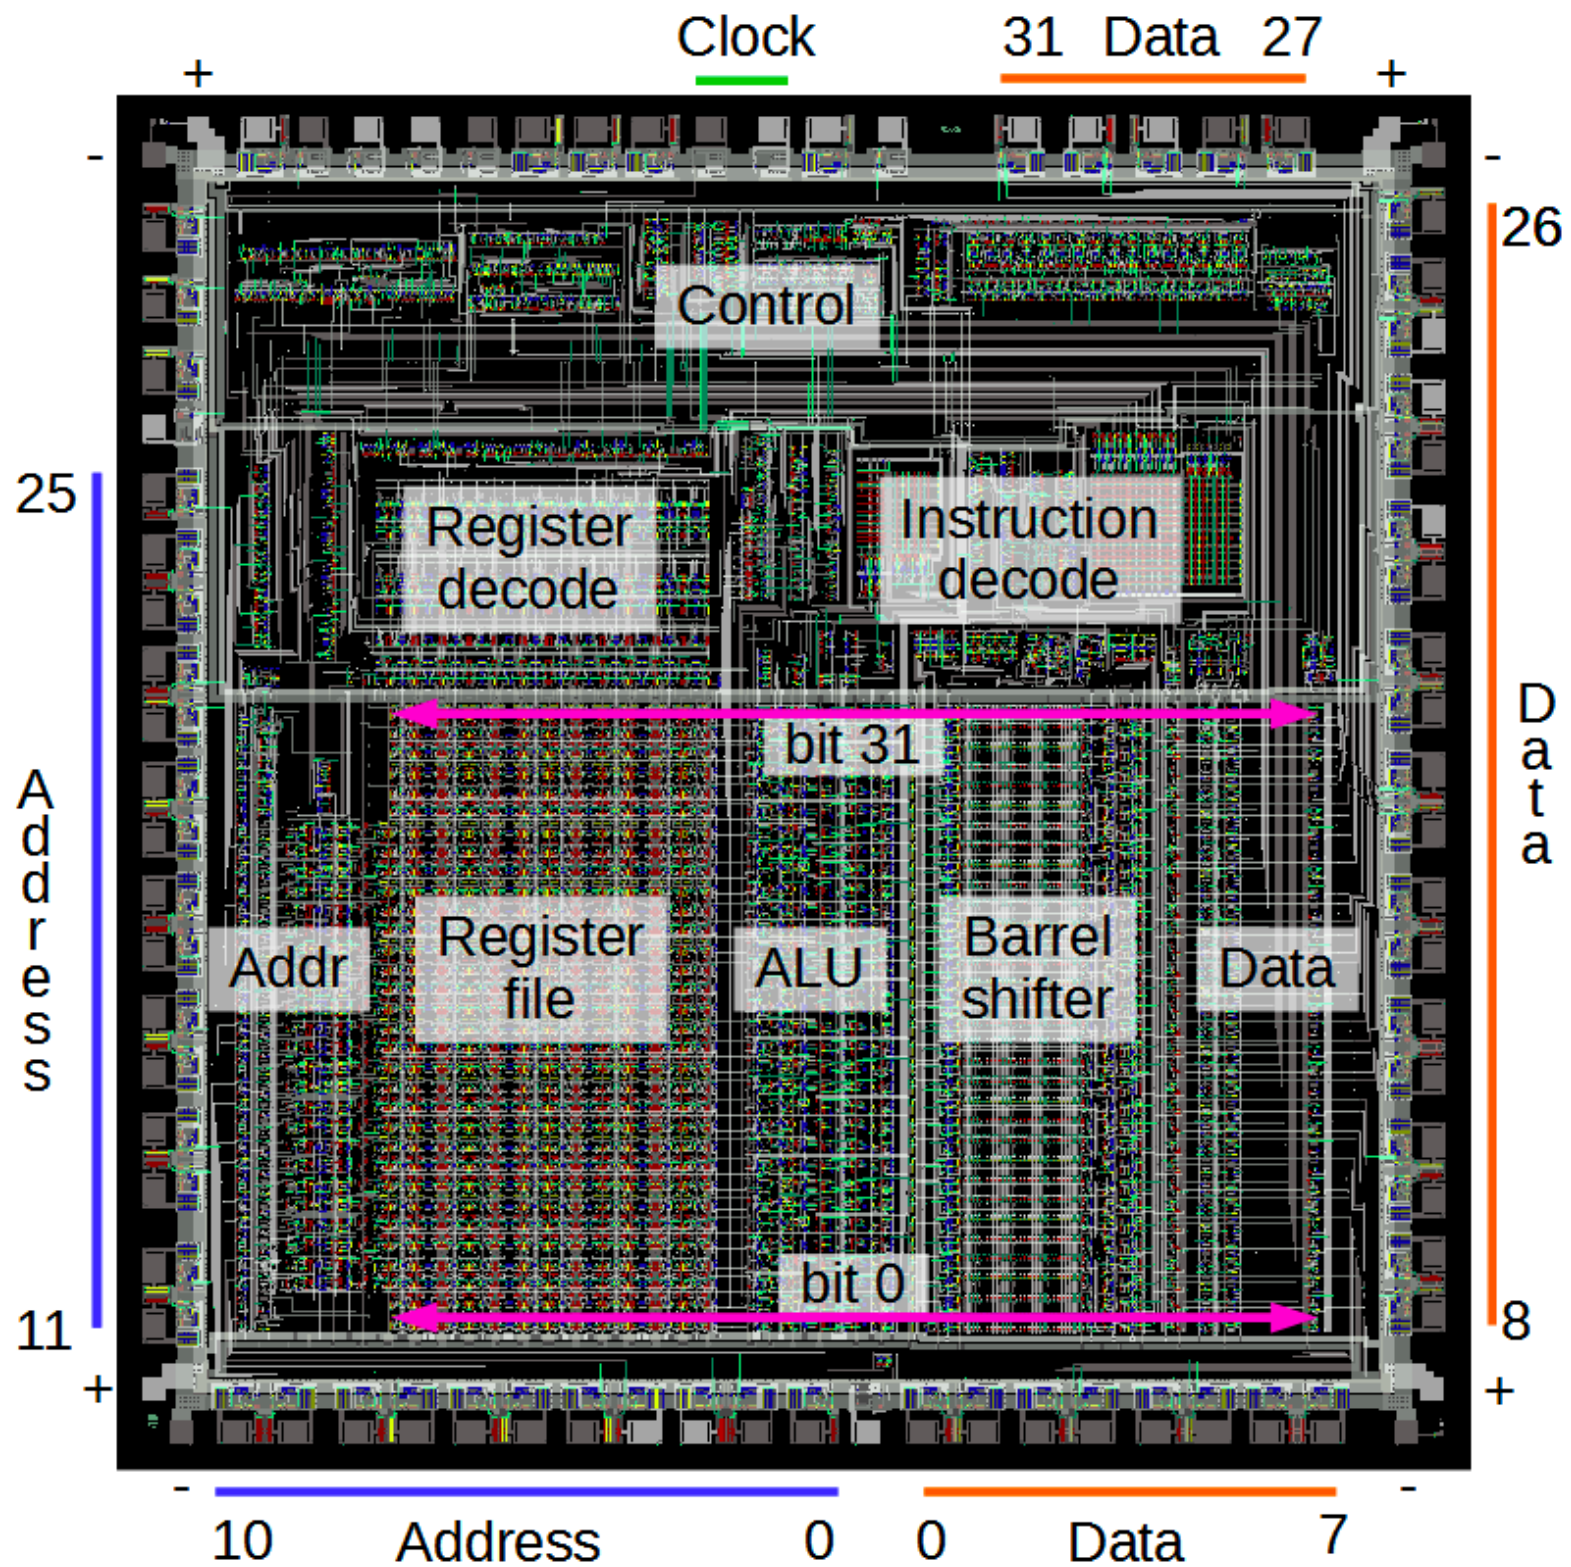



# **Manipulating Bit Fields**

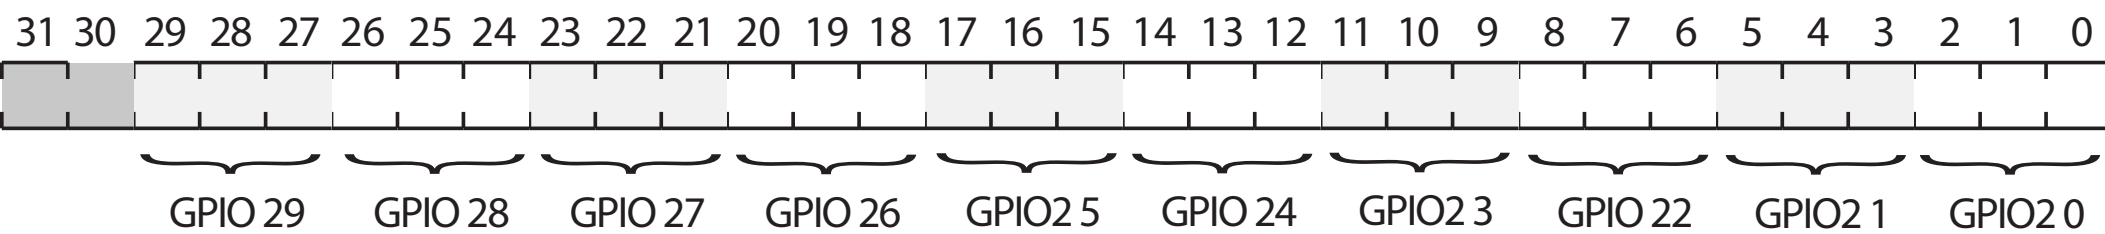

**// Set GPIO 20 and 21 both to OUTPUT**

**mov r1, #1**


**orr r1, #(1<<3)**

**str r1, [r0]**

**// What value is in FSEL2 now?**

**// What mode is GPIO 20 set to now?**

**// What mode is GPIO 21 set to now?**

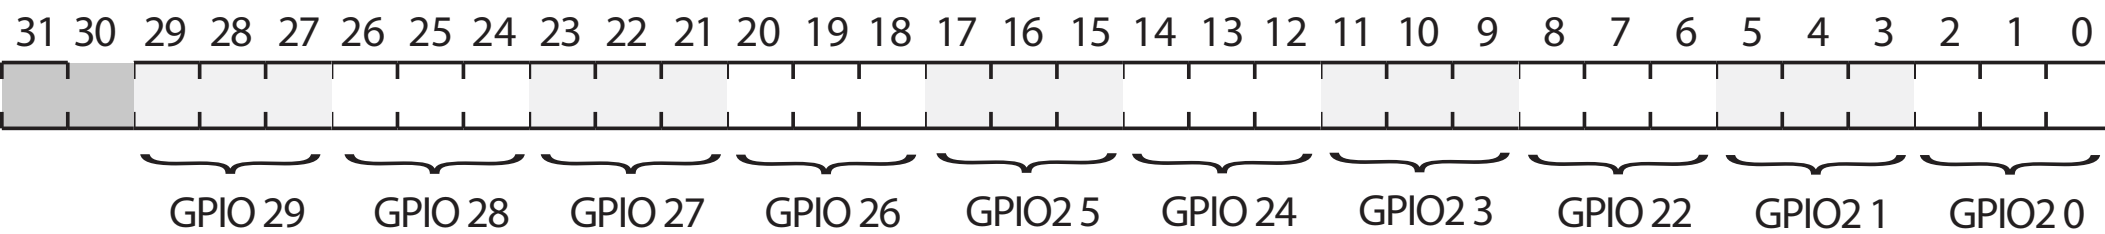

**// Set GPIO 20 to OUTPUT**

**mov r1, #1**

**str r1, [r0]**


**// Set GPIO 21 to OUTPUT**

**mov r1, #(1<<3)**

**str r1, [r0]**

**// What value is in FSEL2 now?**

**// What mode is GPIO 20 set to now?**

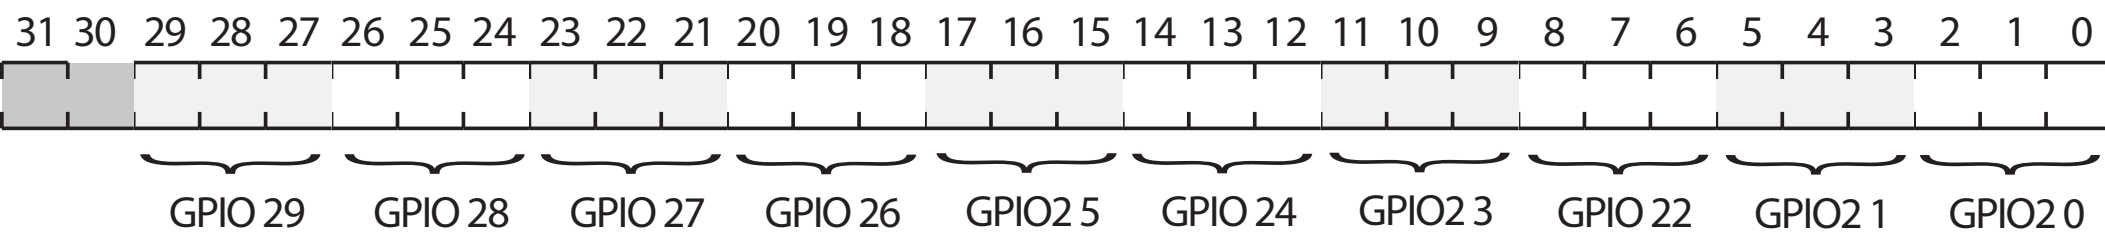

```
// Set GPIO 20 to OUTPUT
```

```
mov r1, #1
```

```
str r1, [r0]
```

```
...
```

```
// Preserve GPIO20, set GPIO21 to OUTPUT
```

```
ldr r1, [r0]
```

```
and r1, #~(0x7<<3)
```

```
orr r1, #(0x1<<3)
```

```
str r1, [r0]
```

```
// What value is in FSEL2 now?
```

// LDR FSEL2, GPIO20 is OUTPUT

ldr r1, [r0]

0000 0000 0000 0000 0000 0000 0000 0001

// 0x7

0000 0000 0000 0000 0000 0000 0000 0111

// 0x7<<3

0000 0000 0000 0000 0000 0000 0011 1000

// ~(0x7<<3)

1111 1111 1111 1111 1111 1111 1100 0111

and r1, #~(0x7<<3)

0000 0000 0000 0000 0000 0000 0000 0001

orr r1, #(0x1<<3)

0000 0000 0000 0000 0000 0000 0000 1001


**Blink**

**// This is tedious ...**

```
mov r0, #0x20000000 // #(0x20>>>8)
orr r0, #0x00200000 // #(0x20>>>16)
orr r0, #0x00000008
```

**// Alternative is to use ldr**  
**ldr r0, FSEL2**

**FSEL2: .word 0x20200008**

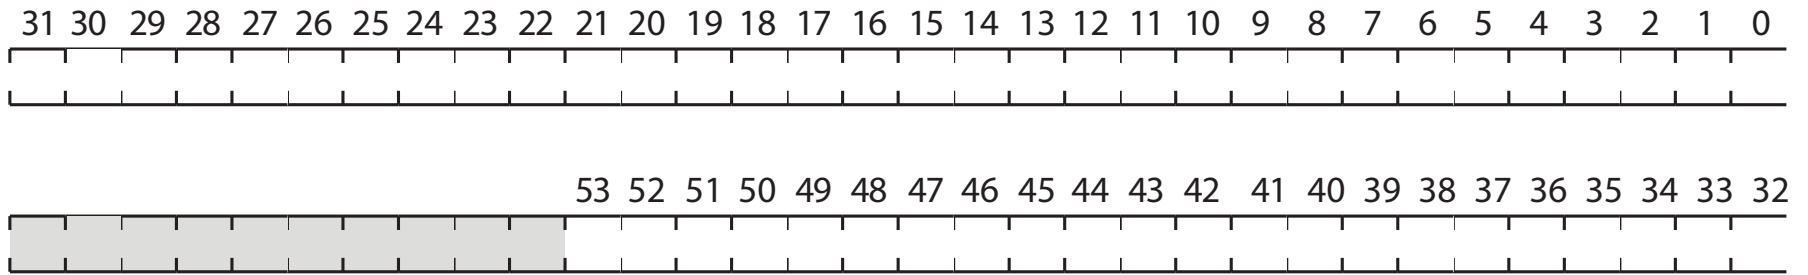

```
mov r1, #(1<<20)
```

```
// Turn on LED connected to GPIO20
```

```
ldr r0, SET0
```

```
ldr r1, [r0]
```

```
// Turn off LED connected to GPIO20
```

```
ldr r0, CLR0
```

```
ldr r1, [r0]
```

```
// Why SET and CLR?
```



```
// Configure GPIO 20 for OUTPUT
```

```
loop:
```

```
// Turn on LED
```

```
// Turn off LED
```

```
b loop
```

# **Loops and Condition Codes**

```
// define constant  
.equ DELAY, 0x3f0000
```

```
mov r2, #DELAY
```

```
loop:
```

```
    subs r2, r2, #1 // s set cond code
```

```
    bne  loop      // branch if r2 != 0
```

# Condition Codes

**Z - Result is 0**

**N - Result is  $<0$**

**C - Carry generated**

**V - Arithmetic overflow**

***Carry and overflow will be covered later***

```
# data processing instruction
#  ra = rb op rc|imm
#
# i - immediate
# s - set condition code
#
```

	op		rb		ra					
1110	00	i	oooo	s	bbbb	aaaa	cccc	cccc	cccc	

# **Branch Instructions**

Code	Suffix	Flags	Meaning
0000	EQ	Z set	equal
0001	NE	Z clear	not equal
0010	CS	C set	unsigned higher or same
0011	CC	C clear	unsigned lower
0100	MI	N set	negative
0101	PL	N clear	positive or zero
0110	VS	V set	overflow
0111	VC	V clear	no overflow
1000	HI	C set and Z clear	unsigned higher
1001	LS	C clear or Z set	unsigned lower or same
1010	GE	N equals V	greater or equal
1011	LT	N not equal to V	less than
1100	GT	Z clear AND (N equals V)	greater than
1101	LE	Z set OR (N not equal to V)	less than or equal
1110	AL	(ignored)	always

# branch

cond            addr

**cccc** 101L 0000 0000 0000 0000 0000 0000

b = bal = branch always

cond            addr

**1110** 101L 0000 0000 0000 0000 0000 0000

bne

cond            addr

**0001** 101L 0000 0000 0000 0000 0000 0000



# **Orthogonal Instructions**

**Any operation**

**Register vs. immediate operands**

**All registers the same\*\***

**Predicated/conditional execution**

**Set or not set condition code**

***Orthogonality leads to composability***

# Summary

**You need to understand how processors represent and execute instructions**

**Instruction set architecture often easier to understand by looking at the bits**

**Reading assembly allows you to know what the processor is doing**

**Rarely write assembly, only 1st assignment**

**Normally write code in C (Julie, next week)**

# **The Fun Begins ...**

## **Labs 1**

- **Assemble Raspberry Pi Kit**
- **Lab assignments sent out tonight**
- **Read lab 1 instructions (now online)**
- **Install tool chain**

## **Assignment 1**

- **Larson scanner**

# **Definitive References**

**BCM2865 peripherals document + errata**

**Raspberry Pi schematic**

**ARMv6 architecture reference manual**

**see Resources on [cs107e.github.io](https://cs107e.github.io)**