


Installation Manual

DSD Locking Mechanism

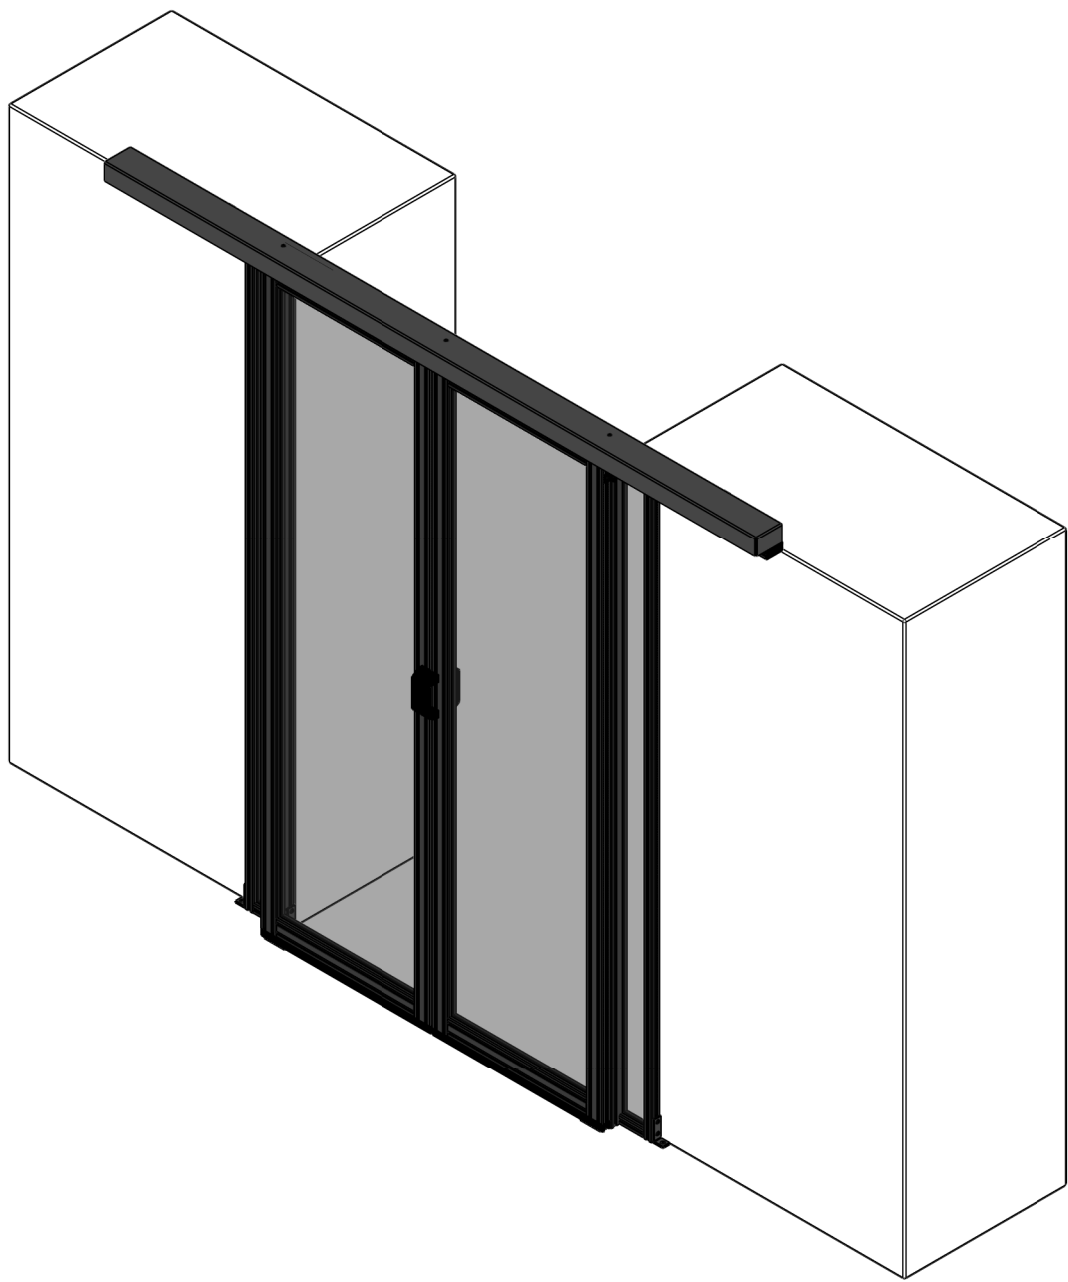

REV	DATE	DESCRIPTION
0	01-JUN-2020	NEW RELEASE

Table of Contents

	PAGE NUMBER
SAFETY & HANDLING	2
TOOLS LIST	2
PARTS LIST	2
ATTACH LOCK BRACKET	4-5
ATTACH DOOR BRACKET	6
MAKE ADJUSTMENTS	7
WIRING HARNES LOCATION	8

Safety & Handling

When unpacking the Double Sliding Doors and components, be careful not to scratch the aluminum frame and the polycarbonate. They have been carefully packaged and inspected before crating. Inspect all components and be sure all required hardware is included for assembly. Reference the Packing Slip.


Use the proper tools for all assembly procedures as well as installation of the doors in and around the cabinets.


All movement and assembly requires two persons for safety and protection of the doors being installed and the equipment around them.

Tools List

Tape Measure	Step Ladder	Extension Cord	Hammer	Rubber Mallet	Phillips Driver
1/8" Allen Wrench	Pencil	Fine Point Marker	1/8" Allen Wrench	Vacuum	Amonia free Cleaner
Rags	Scissors	Knife			


Remove rubber band and separate the lock from the bracket

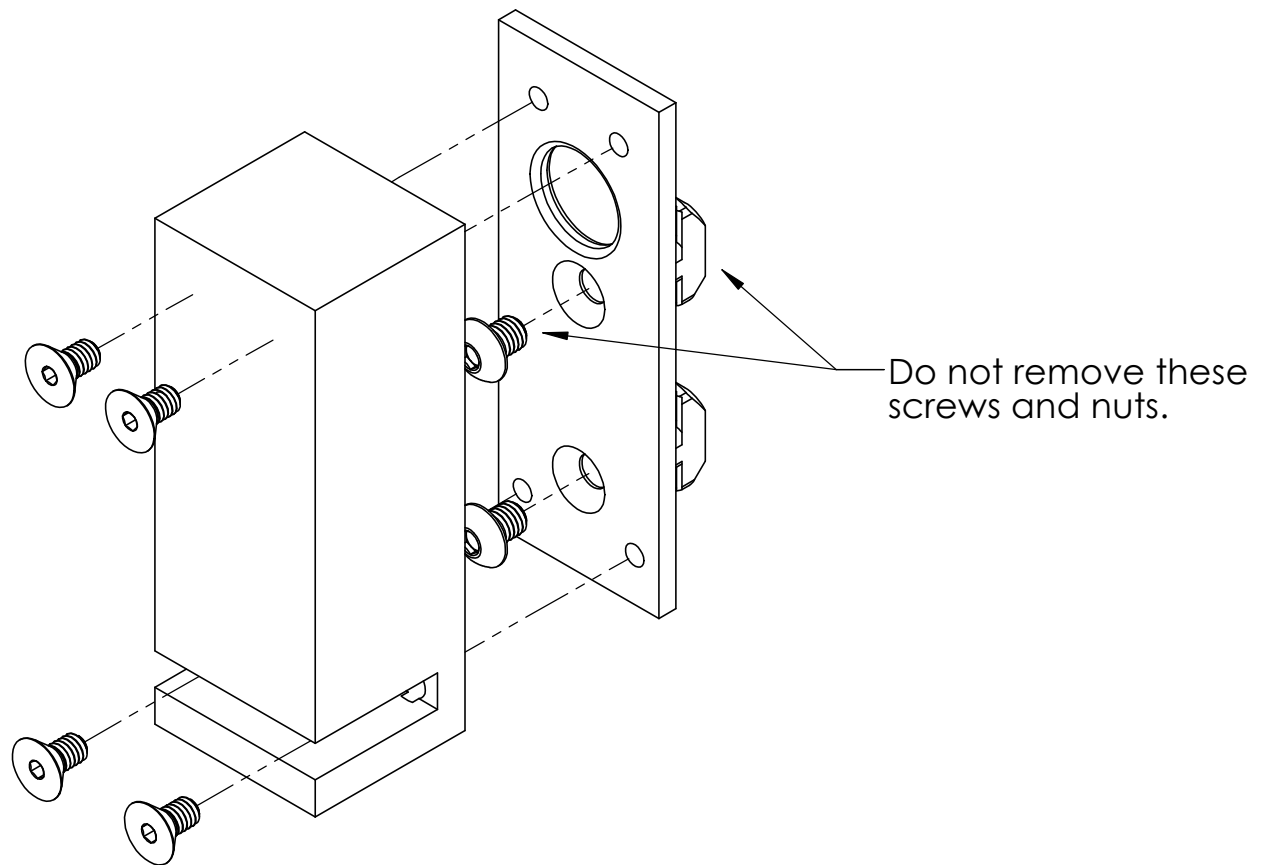

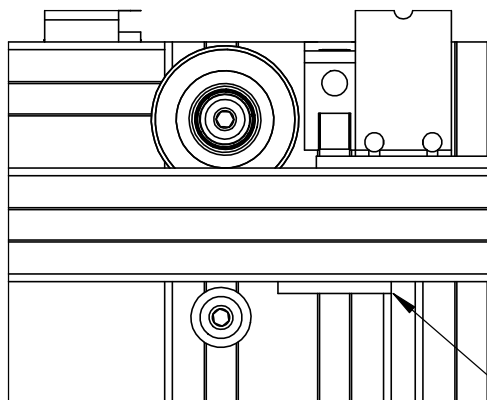


Attache Lock
Bracket flush with
edge of door

DETAIL A

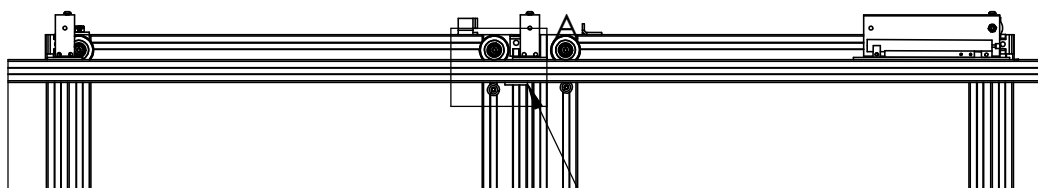


Place bracket in this location

Push bracket as far towards
the back that you can

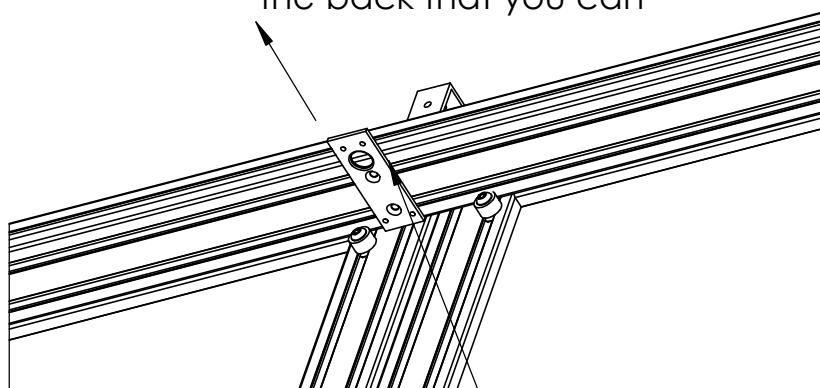


Align edge of bracket with
the edge of the sliding door

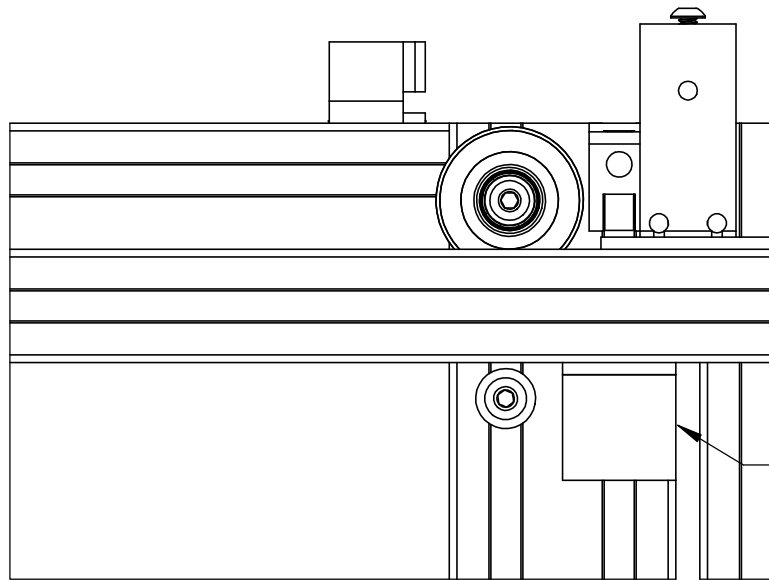


DETAIL A


Attach Lock to bracket using the 4 flat head socket screws provided with the door lock. (See exploded view on page 3)

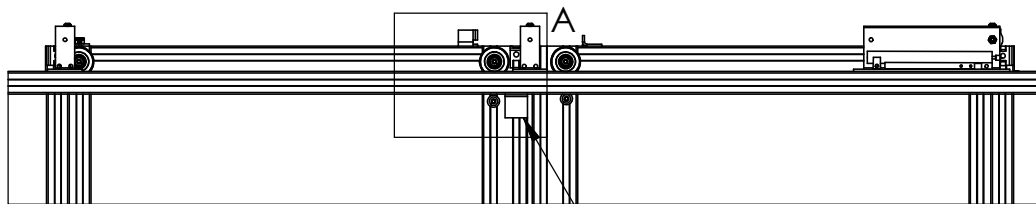

Attach Lock

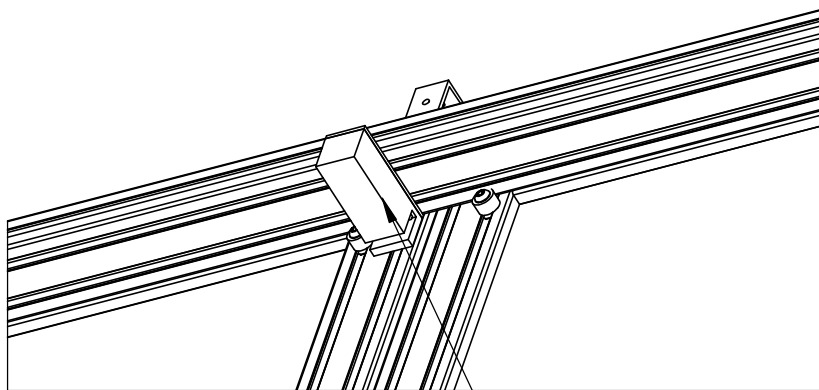


Attach lock to bracket.

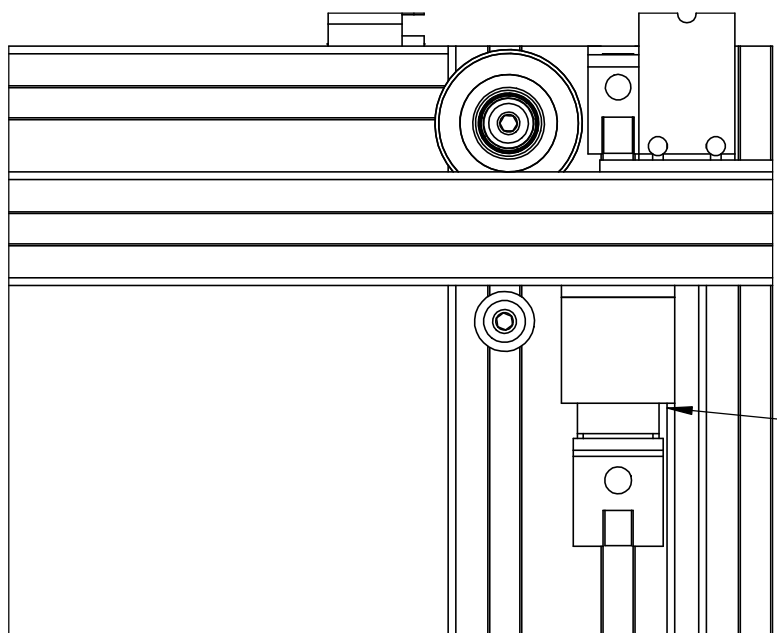


DETAIL A

Attach Door Bracket to the door. Adjust bracket so that the lock can latch in the hole of the bracket.

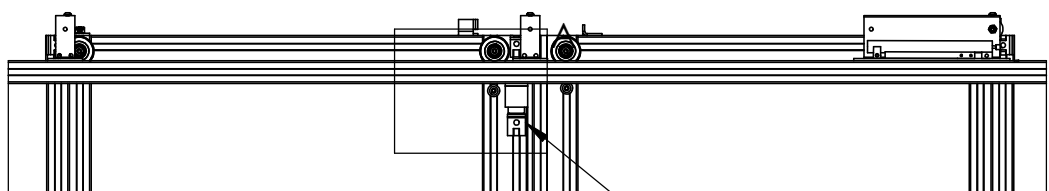


Attach Lock

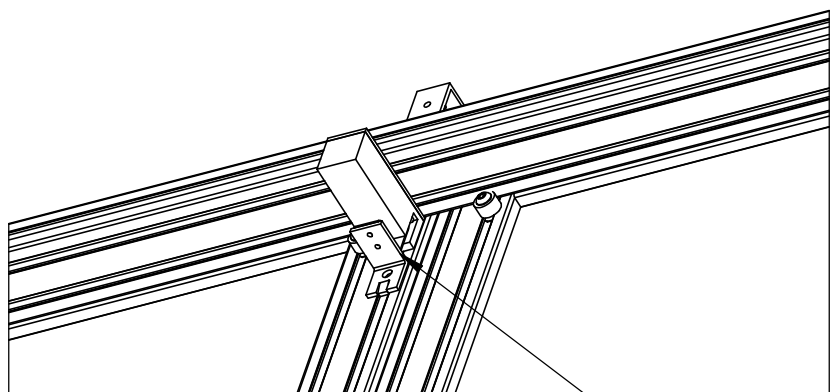


Attach door bracket to the door.

Make any adjustments necessary to the location of the Lock and the Door Bracket to ensure the door closes properly and locks. When the door is locked and someone attempts to open the door, there should be a small gap between the doors. If the gap is large, make adjustments to the location of the Lock or Door Bracket to minimize the gap.

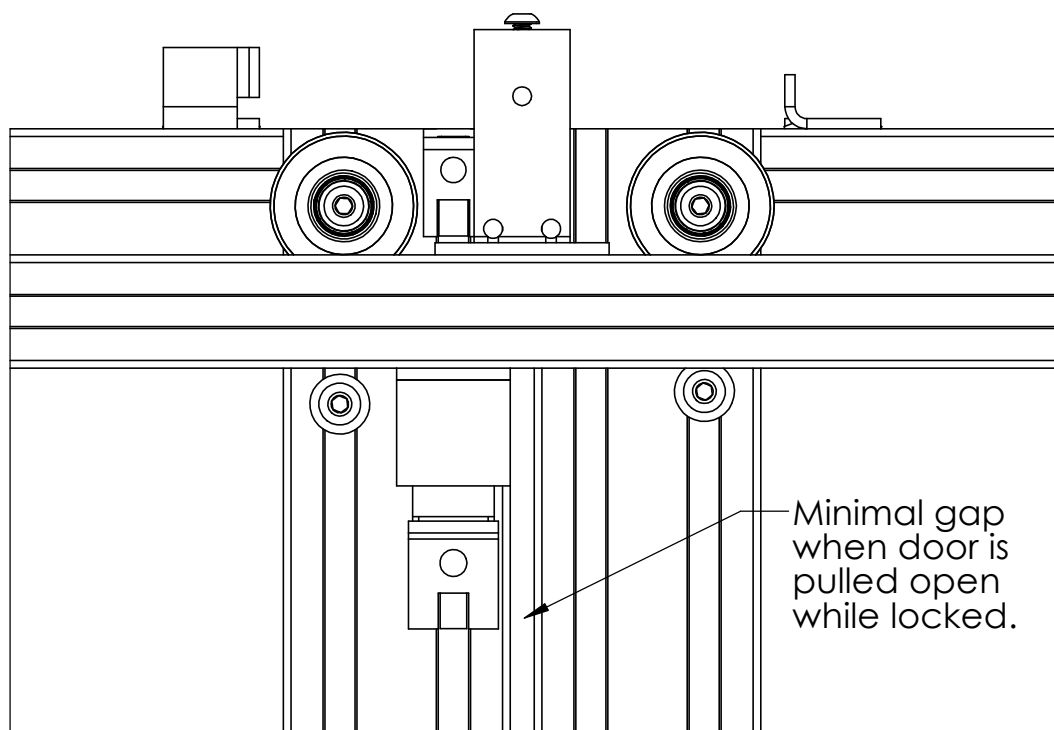


Minimal gap
when door is
pulled open
while locked.

DETAIL B

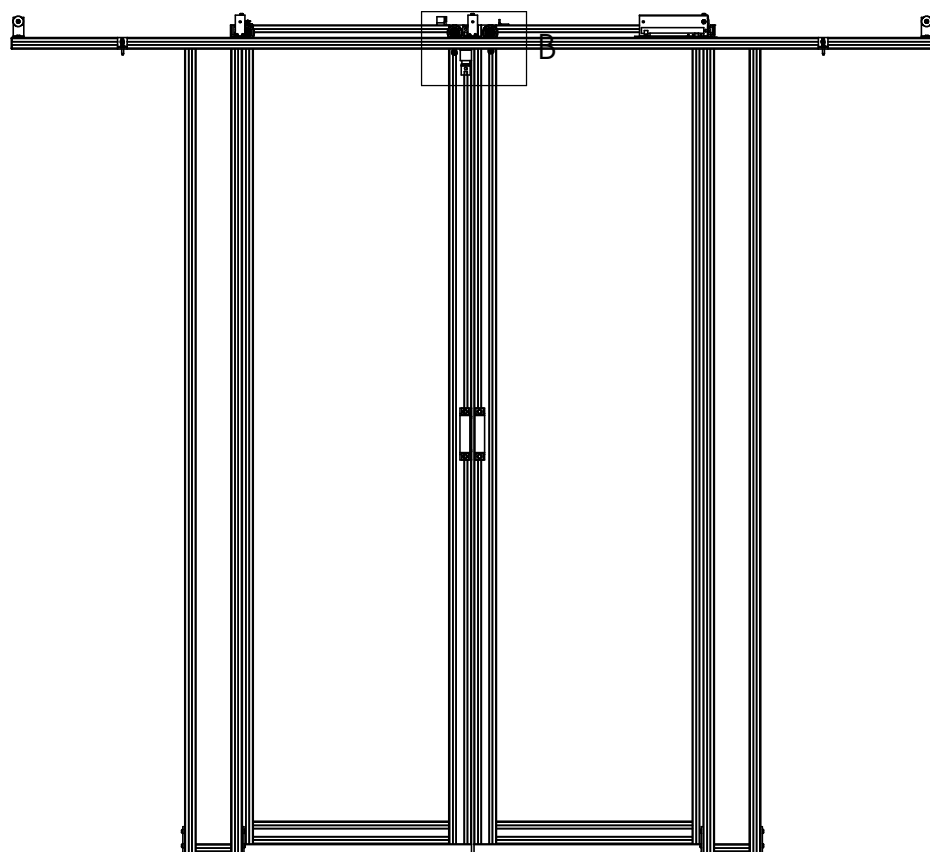

Reference the paper provided from the Manufacturer of the Locking Assembly for termination to field wiring of the Locking Assembly.

Route wiring harness in this slot and then cover with the gray slot cover provided.

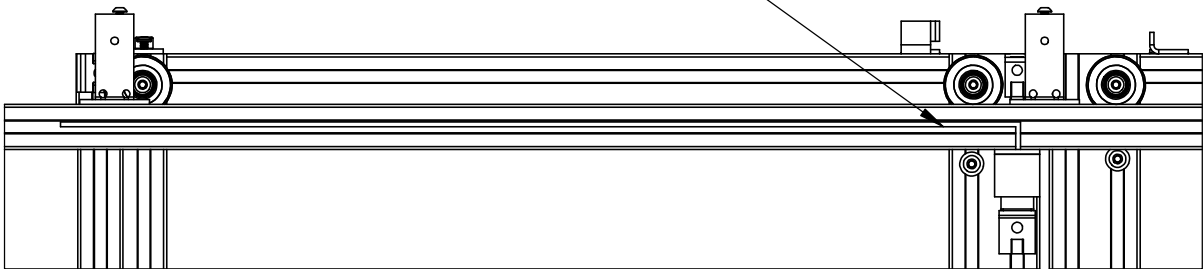

DETAIL C

