


Heat Activated Ceiling Panels

6560 T-6 Temper Aluminum
frame with Clear Polyvinyl
Chloride melt-away sheets

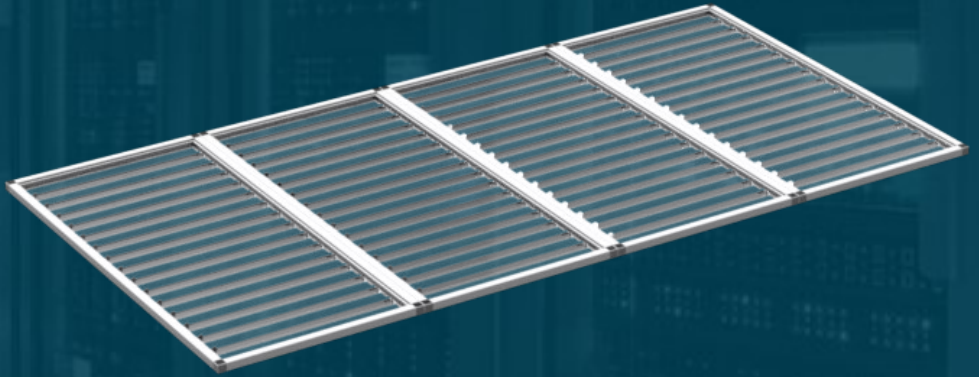

CUSTOM CONTAINMENT


Panels are installed individually for easy removal for access above cabinets. Each panel built to specification for custom fit for any aisle size.

STANDARD FEATURES

- ◆ Removable individual panels for easy access above the cabinets
- ◆ Heat activated design to shrink and drop away
- ◆ Sturdy aluminum frame
- ◆ Clear translucent panel
- ◆ Installation track and hardware
- ◆ Approved for use under fire suppression system

OPTIONS

- ◆ Clear/Black anodize
- ◆ Custom powder coat finish
- ◆ Leveling kits for uneven cabinets

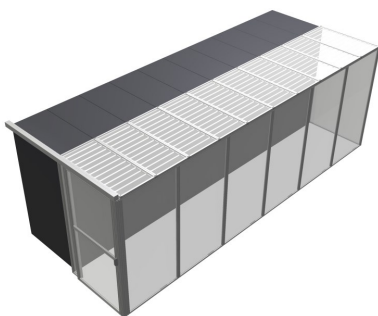


Custom
Finish
Available

Technical Data: Heat Activated Ceiling Panel

Standard Specifications

Size		Paneling	
Width	Up to 26"	Material	15 mil Clear Polyvinyl Chloride
Length	Up to 96"	Color	Clear
Profile Width	1"	Smoke Deviation	ASTM E84
Tolerance	(+ -) 1/32"	Flame Spread ASTM E84	15 Test Result
Frame		UL-R4036, NFPA 13 and FM-4651	
Material 6560	T-6 Temper Aluminum	Approved for installation beneath fire suppression sprinklers	
Tensile Strength	30,000 psi		

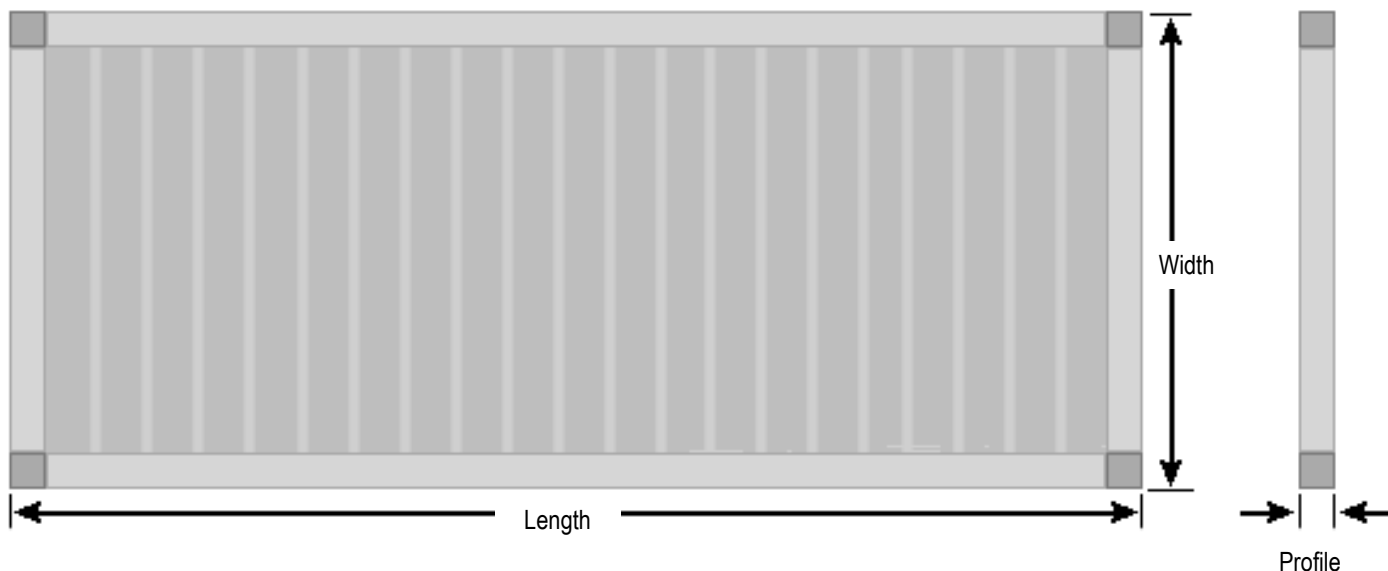

Measuring for Heat Activated Ceiling

Measurements Needed

- Total Aisle length
- Aisle width (Use widest point as measurement)
- Height of all cabinets, in-row cooling units or UPS systems in row (Leveling kits and Rigid Walls can be used to create even rows)
- Ceiling can overlap 1" to 6" onto top of cabinets
- Check for any obstructions above the cabinets around the inside edge of aisle