


# Rigid Wall Installation Manual

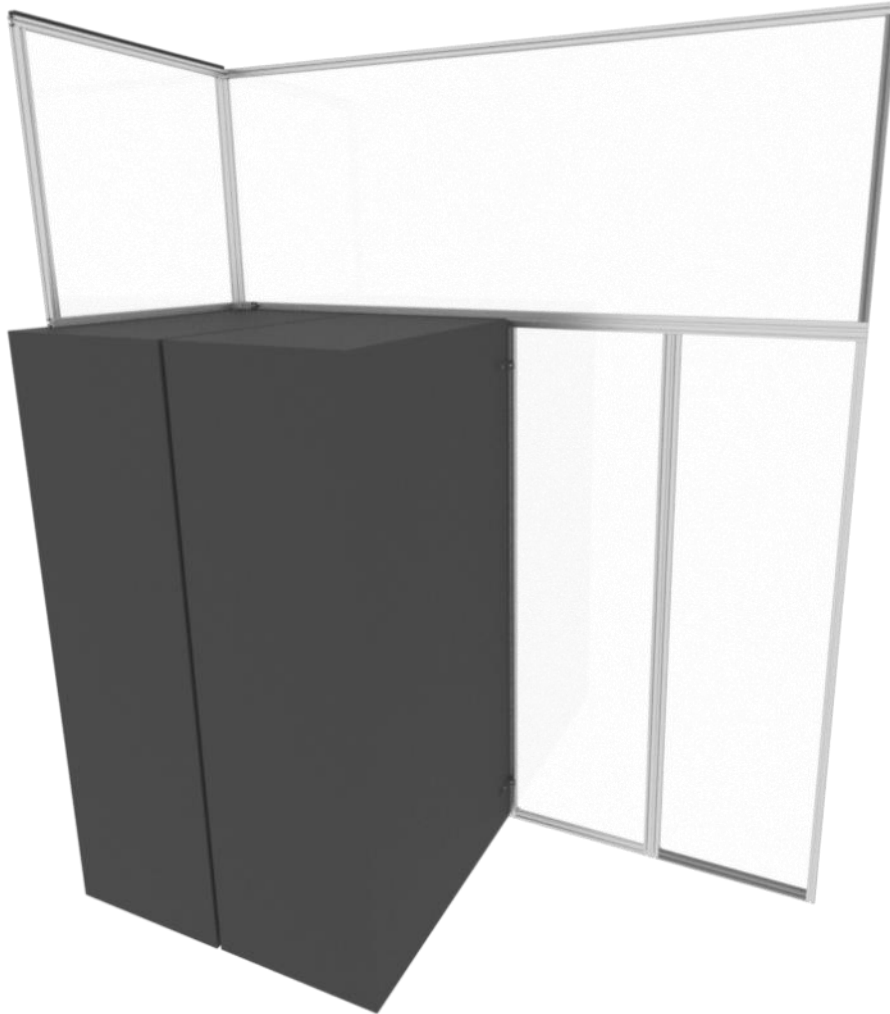

## Safety and Handling

All items have been carefully packaged and inspected before crating. Please use caution when unpacking to prevent scratching or damage.

Before beginning installation, be sure to inspect all components and be sure everything is accounted for.

Use only proper tools for assembly and installation.

## Tool List

|                       |                     |                          |                      |               |            |
|-----------------------|---------------------|--------------------------|----------------------|---------------|------------|
| Tape Measure          | Step Ladder         | Extension Cord           | Hammer               | Rubber Mallet | Level      |
| Phillips Screw Driver | 5/16 Hex Nut Driver | 5/32 T-Handle Hex Wrench | Utility Knife        | Vacuum        | Drill      |
| * 1/4 Masonry Bit     | * Hammer Drill      | Rags                     | Ammonia free cleaner | Pencil        | **Heat Gun |

*\* for installation into concrete floors*

*\*\* for removing scratches from polycarbonate*

## General Installation Tips and Tricks

Begin installation by putting together

- A corner section of Rigid Wall
- A Rigid Wall against a wall, beam, or post
- A Rigid Wall against a cabinet.

Then work outward or around the containment.


Mount the Rigid Walls to the cabinets or wall as needed to provide rigidity so Rigid Wall does not flex due to differential pressures of the ventilation system.

For long sections of Rigid Wall panels, space crossbars evenly down the aisle.

Use expanding foam tape to fill small gaps between rigid walls and cabinets or walls.

## Parts List


| Item | Part Number | Description             |
|------|-------------|-------------------------|
| 1    | HDW-400105  | Joining Strip           |
| 2    | HDW-401404  | Formed Mounting Bracket |
| 3    | HDW-400499  | Floor Mount Bracket     |
| 4    | HDW-401702  | Square End-Cap          |




Item 1



Item 2






Item 3




Item 4

There are three basic styles of Rigid Walls, each used to simplify installation depending on the containment configuration:

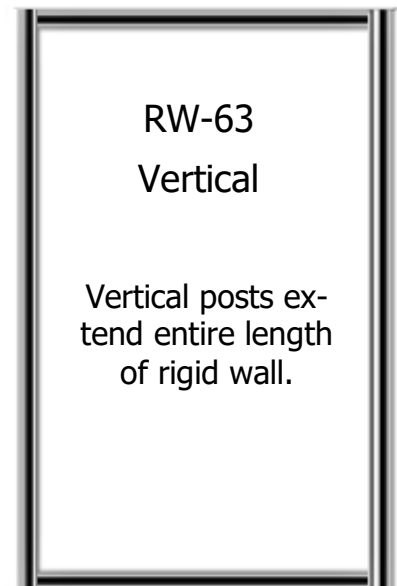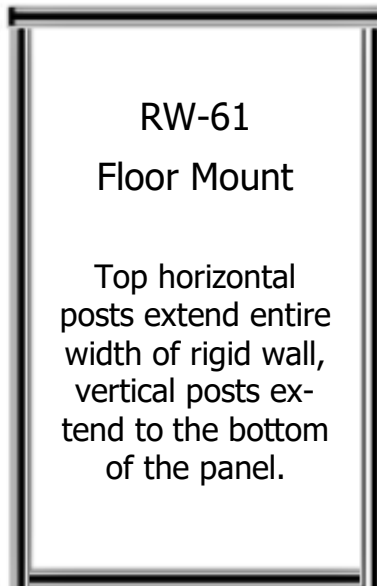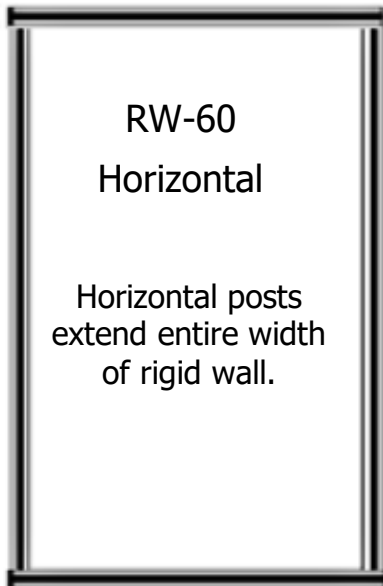


Each of these configurations have an option for a hinged door or sliding access panel to enable access behind the rigid wall.




## How to Install Drop-in Quarter Turn T-Nuts

1. Twist the screw a couple turns into the t-nut.
2. Insert the t-nut into the slot.

3. Turn screw clockwise to twist the t-nut into the slot.

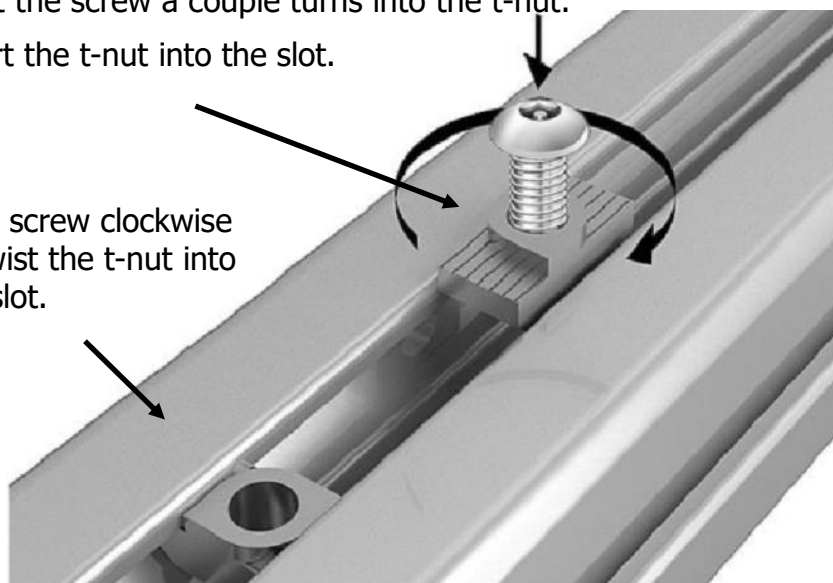

4. Make sure t-nut has fully turned 90 degrees in the slot.

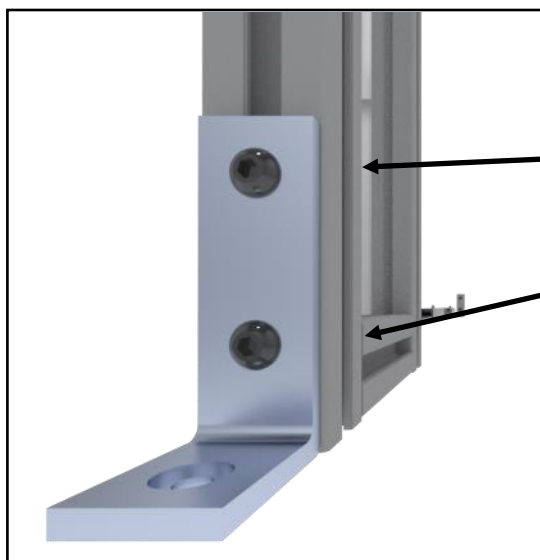


### When installing brackets with more than one hole

1. Twist the screw in the first hole until the t-nut has turned, but do not to fully tighten.
2. Twist the screw in the second hole, making sure the t-nut turns, and fully tighten.
3. Return to the first screw and tighten.



## How to connect Rigid Walls

### Outside Corner Connection

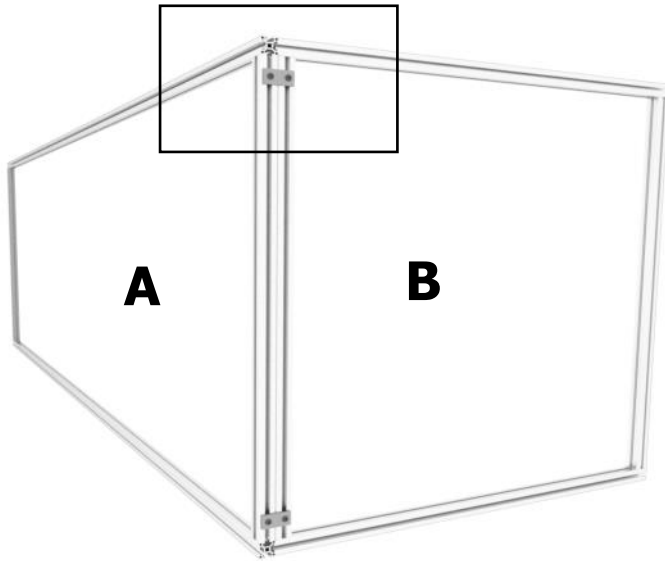


Use a Joining Strip to attach the end of Panel A to the Edge of Panel B. (See Page 6)

### Panel Face to Panel Face Connection

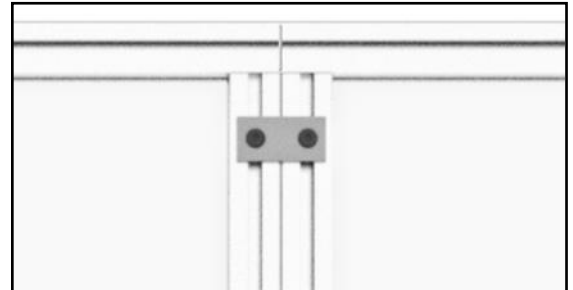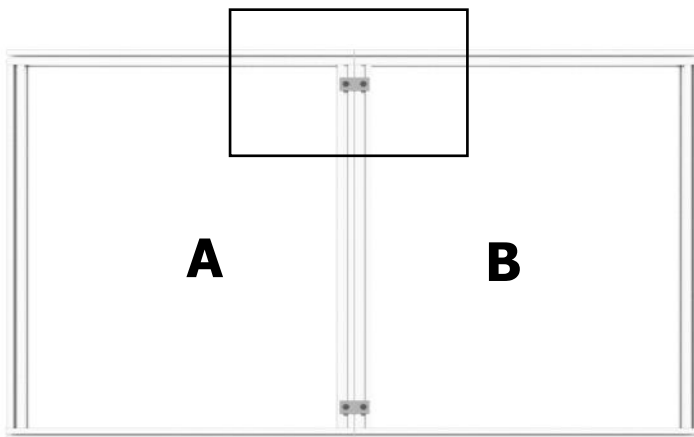

Use a Joining Strip to attach the edge of Panel A to the edge of Panel B. (See Page 6)



### Panel to Wall or Cabinet

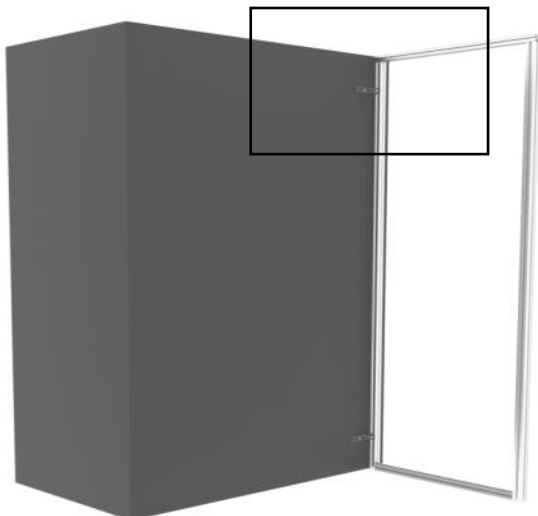

Use a Formed Mounting Bracket to attach the edge of the panel to the cabinet or wall. (See Page 7)



## How to connect Rigid Walls

### Rigid Wall to Floor

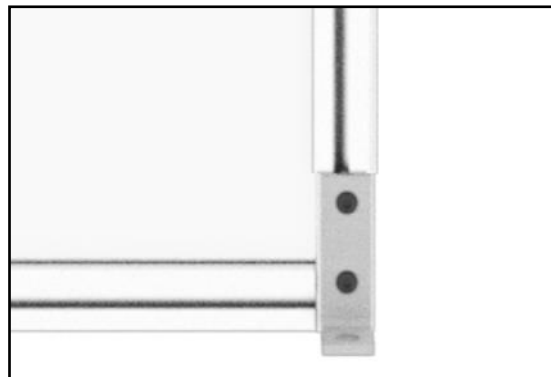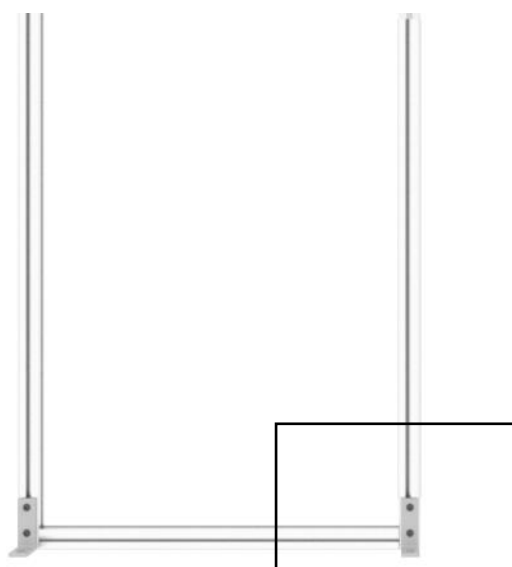

Use a Floor Mount Bracket to attach the rigid wall to the floor. (See Page 8)

### Filling Gaps Between Rigid Walls

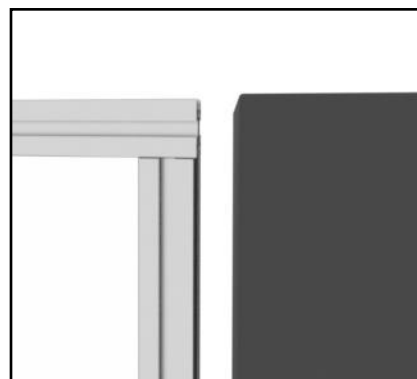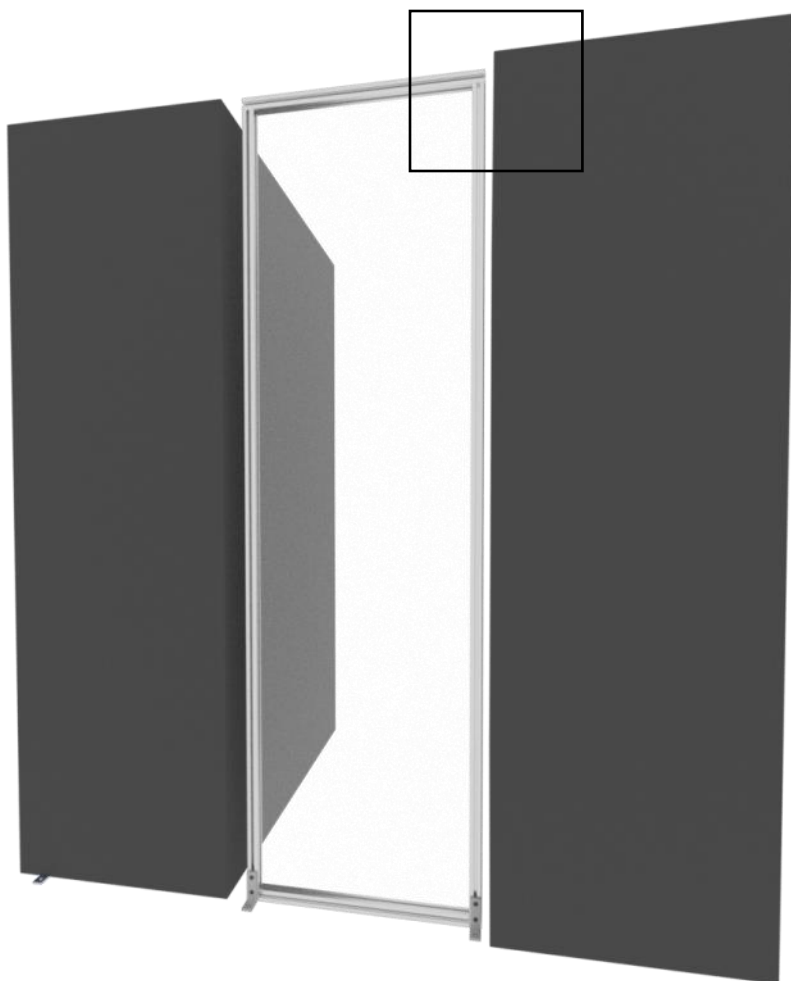


Often times a small gap is designed into the containment layout. The gap can be between:

- Two Rigid Walls
- A Rigid Wall and a cabinet
- A Rigid Wall and a structural wall.




Fill gaps using expanding foam tape. (See page 9)

## How to connect Rigid Walls

### Joining Strips

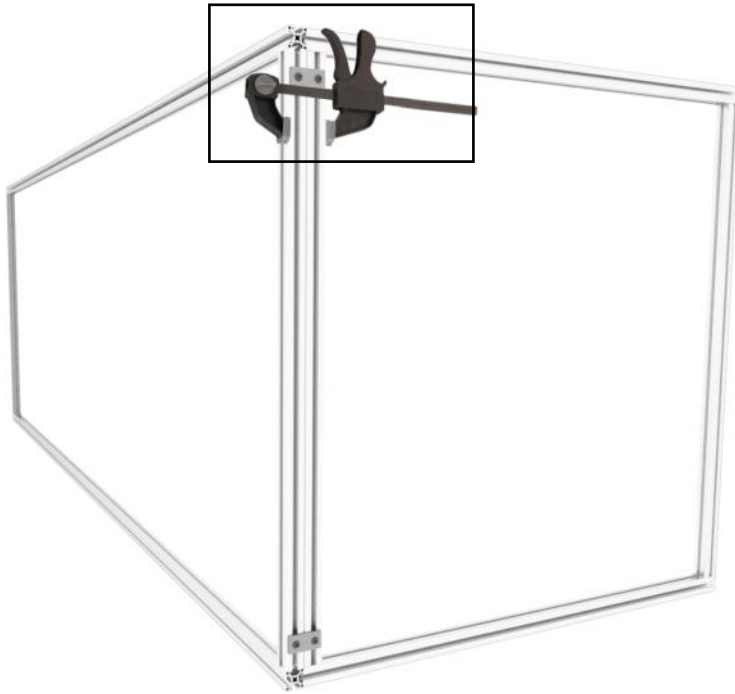


1. Clamp the rigid walls firmly together next to the location of the joining strip (Ensure corners are tight and properly aligned).
2. Insert Joining strip into place.
3. Tighten joining strip using 5/32 T-Handle Allen Wrench.
4. Insert End Caps onto the ends of the extrusion (if applicable).

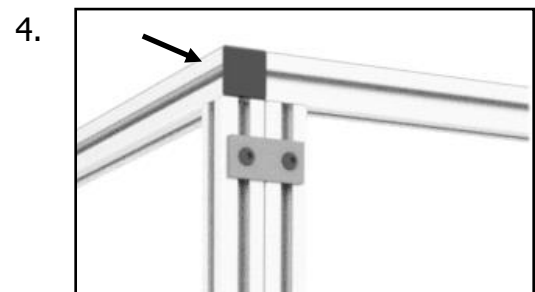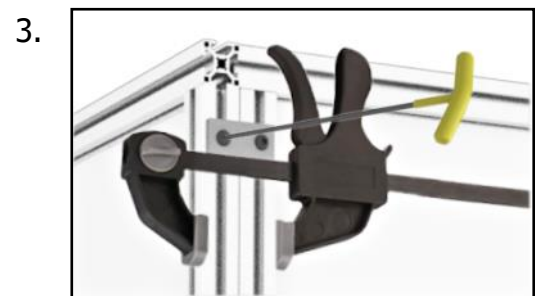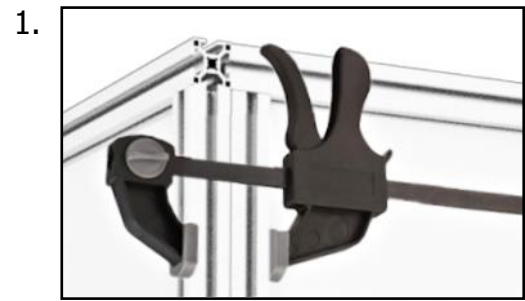


# How to connect Rigid Walls

## Formed Mounting Brackets

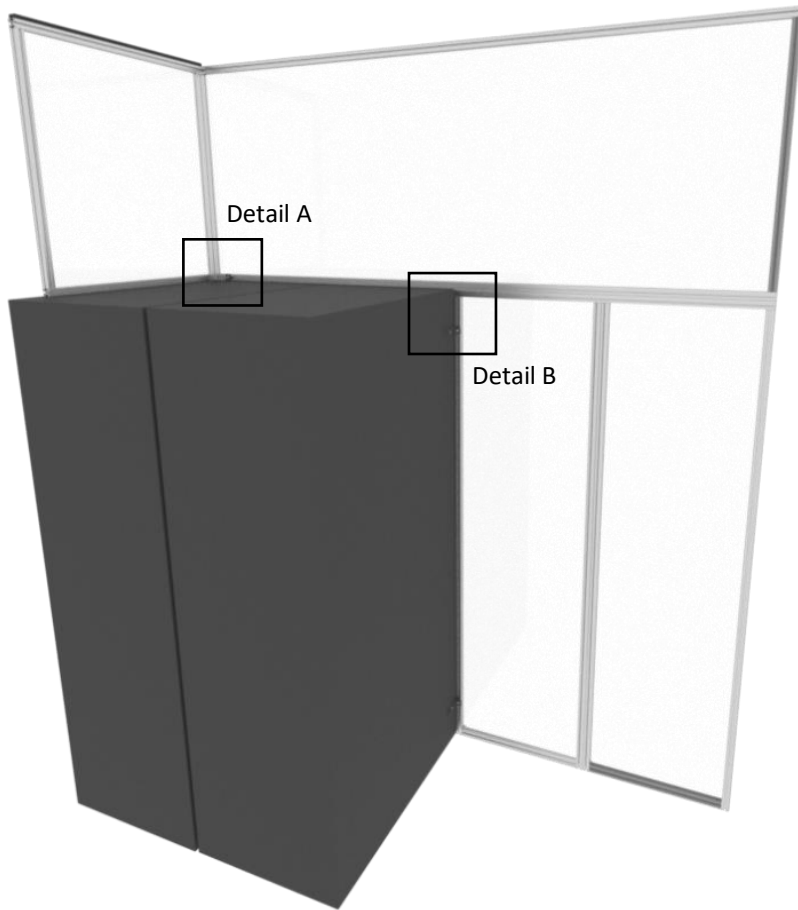

Mounting to the top of a cabinet

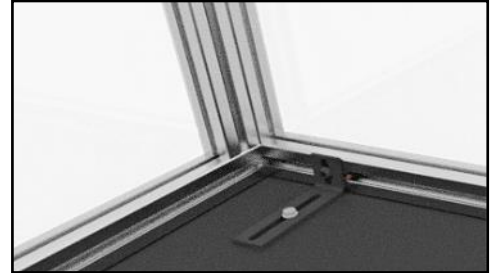


Detail A


Mounting to the side of a cabinet



Detail B

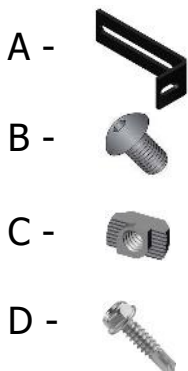

1. Attach the formed mounting bracket (A) to the Rigid Wall using a 1/4-20 x 3/8 screw (B) and a drop-in quarter turn t-nut (C).
2. Attach the formed mounting bracket to the cabinet using the #10 x 3/4" self-tapping screw (D)\*.


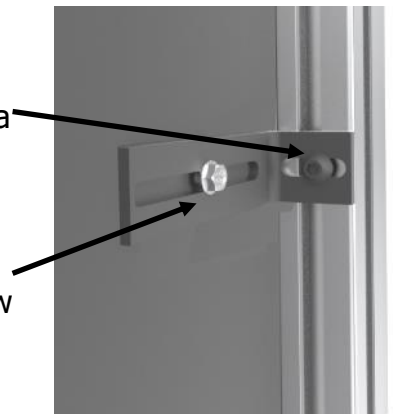


*\* A Formed Mounting Bracket can be attached to a wall or post using a grabber screw or a sheetrock anchor kit.*



# How to connect Rigid Walls

## Floor Mount Brackets

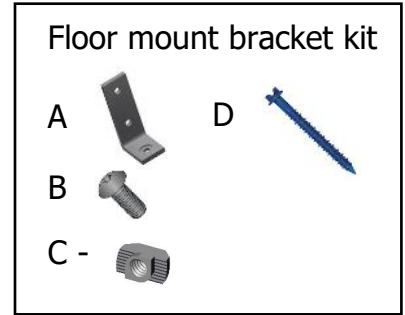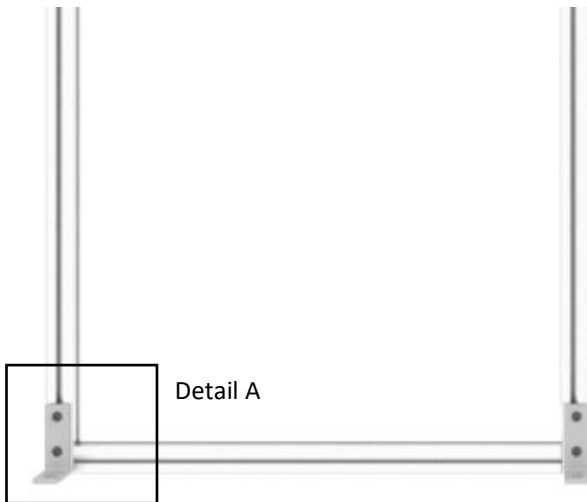

### Step 1:

Attach the floor mount bracket (A) to the Rigid Wall using the 1/4 -20 x 1/2 screw (B) and the drop-in quarter turn t-nut (C). (Detail A)





Detail A


### Step 2:

#### Concrete floor installation

- With the side panel in the correct position, use a hammer drill with a 3/16" bit to drill through the floor mount bracket into the concrete floor
- Use a drill driver to screw the 1/4 x 1 1/4" Hex Tap-King Screw (D) into the floor

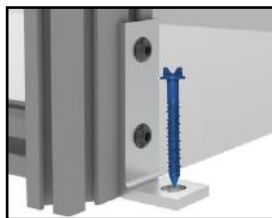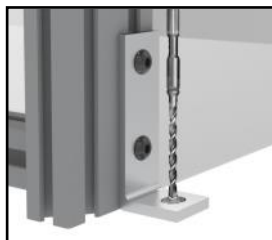

#### Raised floor installation

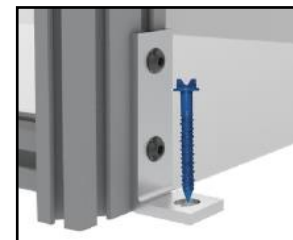

Use a drill driver to screw the 1/4 x 1 1/4" Hex Tap-King Screw (D) into the floor

# How to connect Rigid Walls

## Apply Foam Tape




Peel the backing off of the expanding foam tape (provided) and apply to the edge of the Rigid Wall as shown in Detail A.



Detail A


## Install Rigid Wall

**Rigid Wall to cabinet with foam tape**

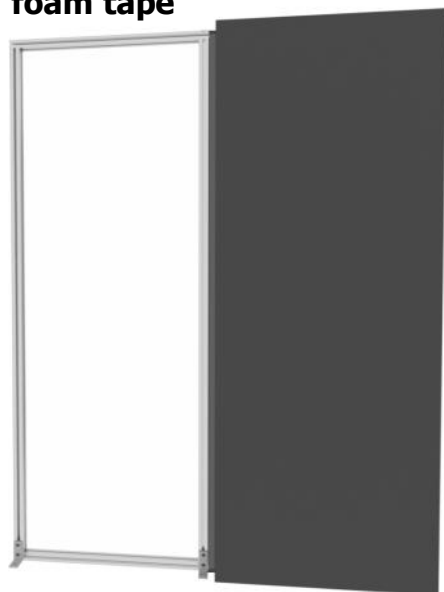

Put Rigid Wall in place and attach to cabinet with a formed mounting bracket. See page 6.

**Rigid Wall to Rigid Wall with foam tape**

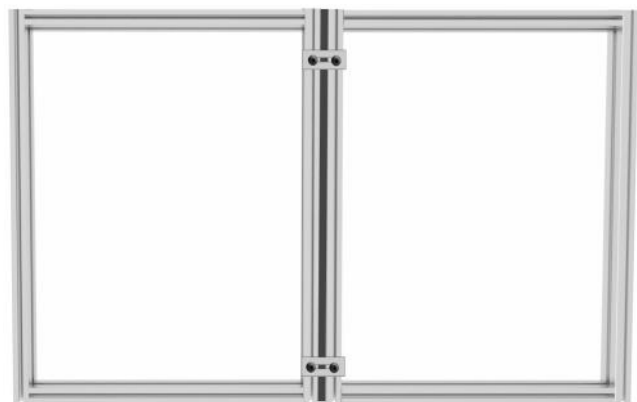

When attaching two rigid walls together with a designed gap, slotted joining strips will be provided (see below). Do not use clamps when using expanding foam tape between Rigid Walls.



*Slotted Joining Strip.*

# Maintenance

## Polycarbonate Cleaning and Maintenance Instructions

1. Use Easyfix anti-static Spray to dispel static after removing the protective film.
2. Remove dust from panels using a damp clean microfiber cloth.
3. Clean smudges or dirt from polycarbonate panels with a mild soap or detergent in warm water using a clean microfiber cloth or sponge. Rinse area with warm water after cleaning and dry with a chamois to prevent spots.

### DO NOT:

- Use harsh chemicals, sprays, or creams, including ammonia, alcohol, and bleach.
- Use dirty or dusty cloths.
- Use paper towels or other paper based products for cleaning.
- Scrape sheets with squeegees, razor blades, or other instruments.
- Use scrub brushes, scouring pads, or other rough materials for cleaning.

### To Remove Scratches

Use a heat gun. Move the heat gun back and forth slowly over the scratch approximately 2 inches above the polycarbonate. After several passes the scratch will no longer be visible. As soon as the scratch can no longer be seen, remove the heat from the surface.