



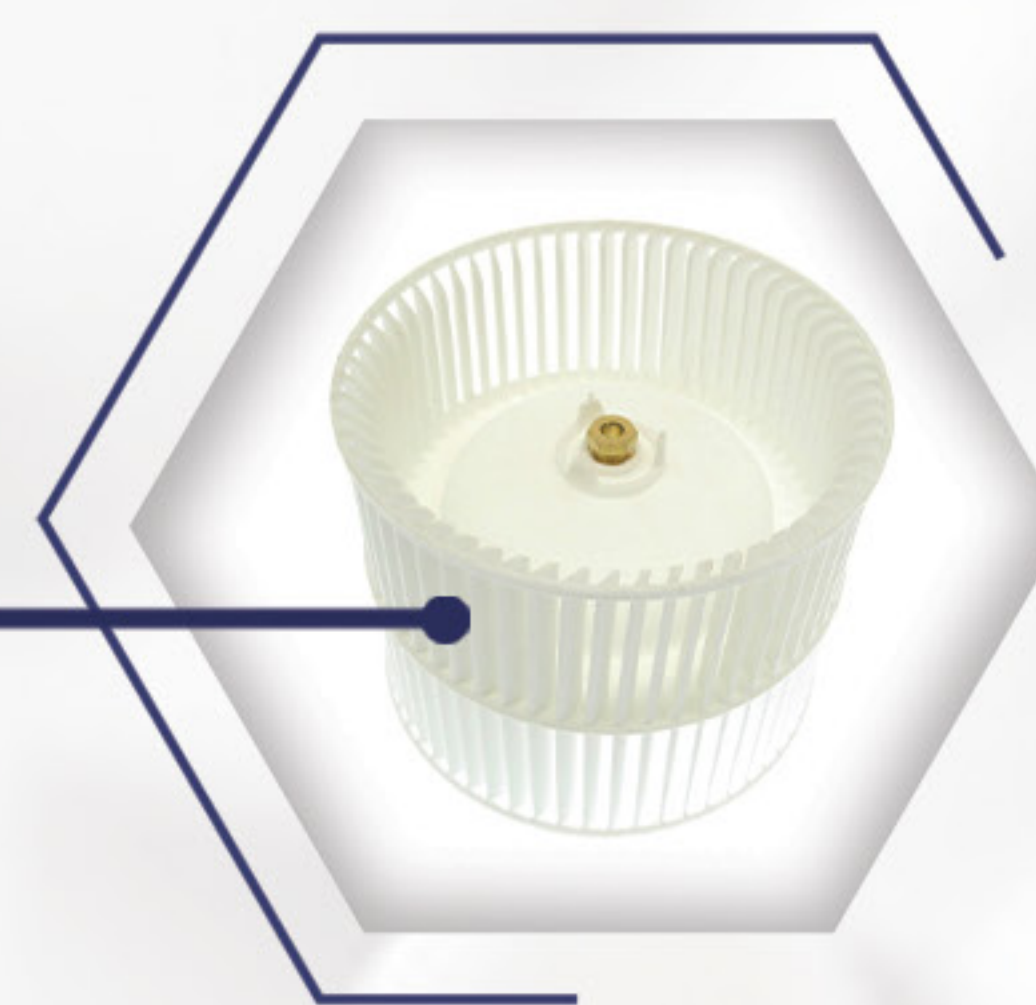

**Where Innovation Meets
Sustainability**

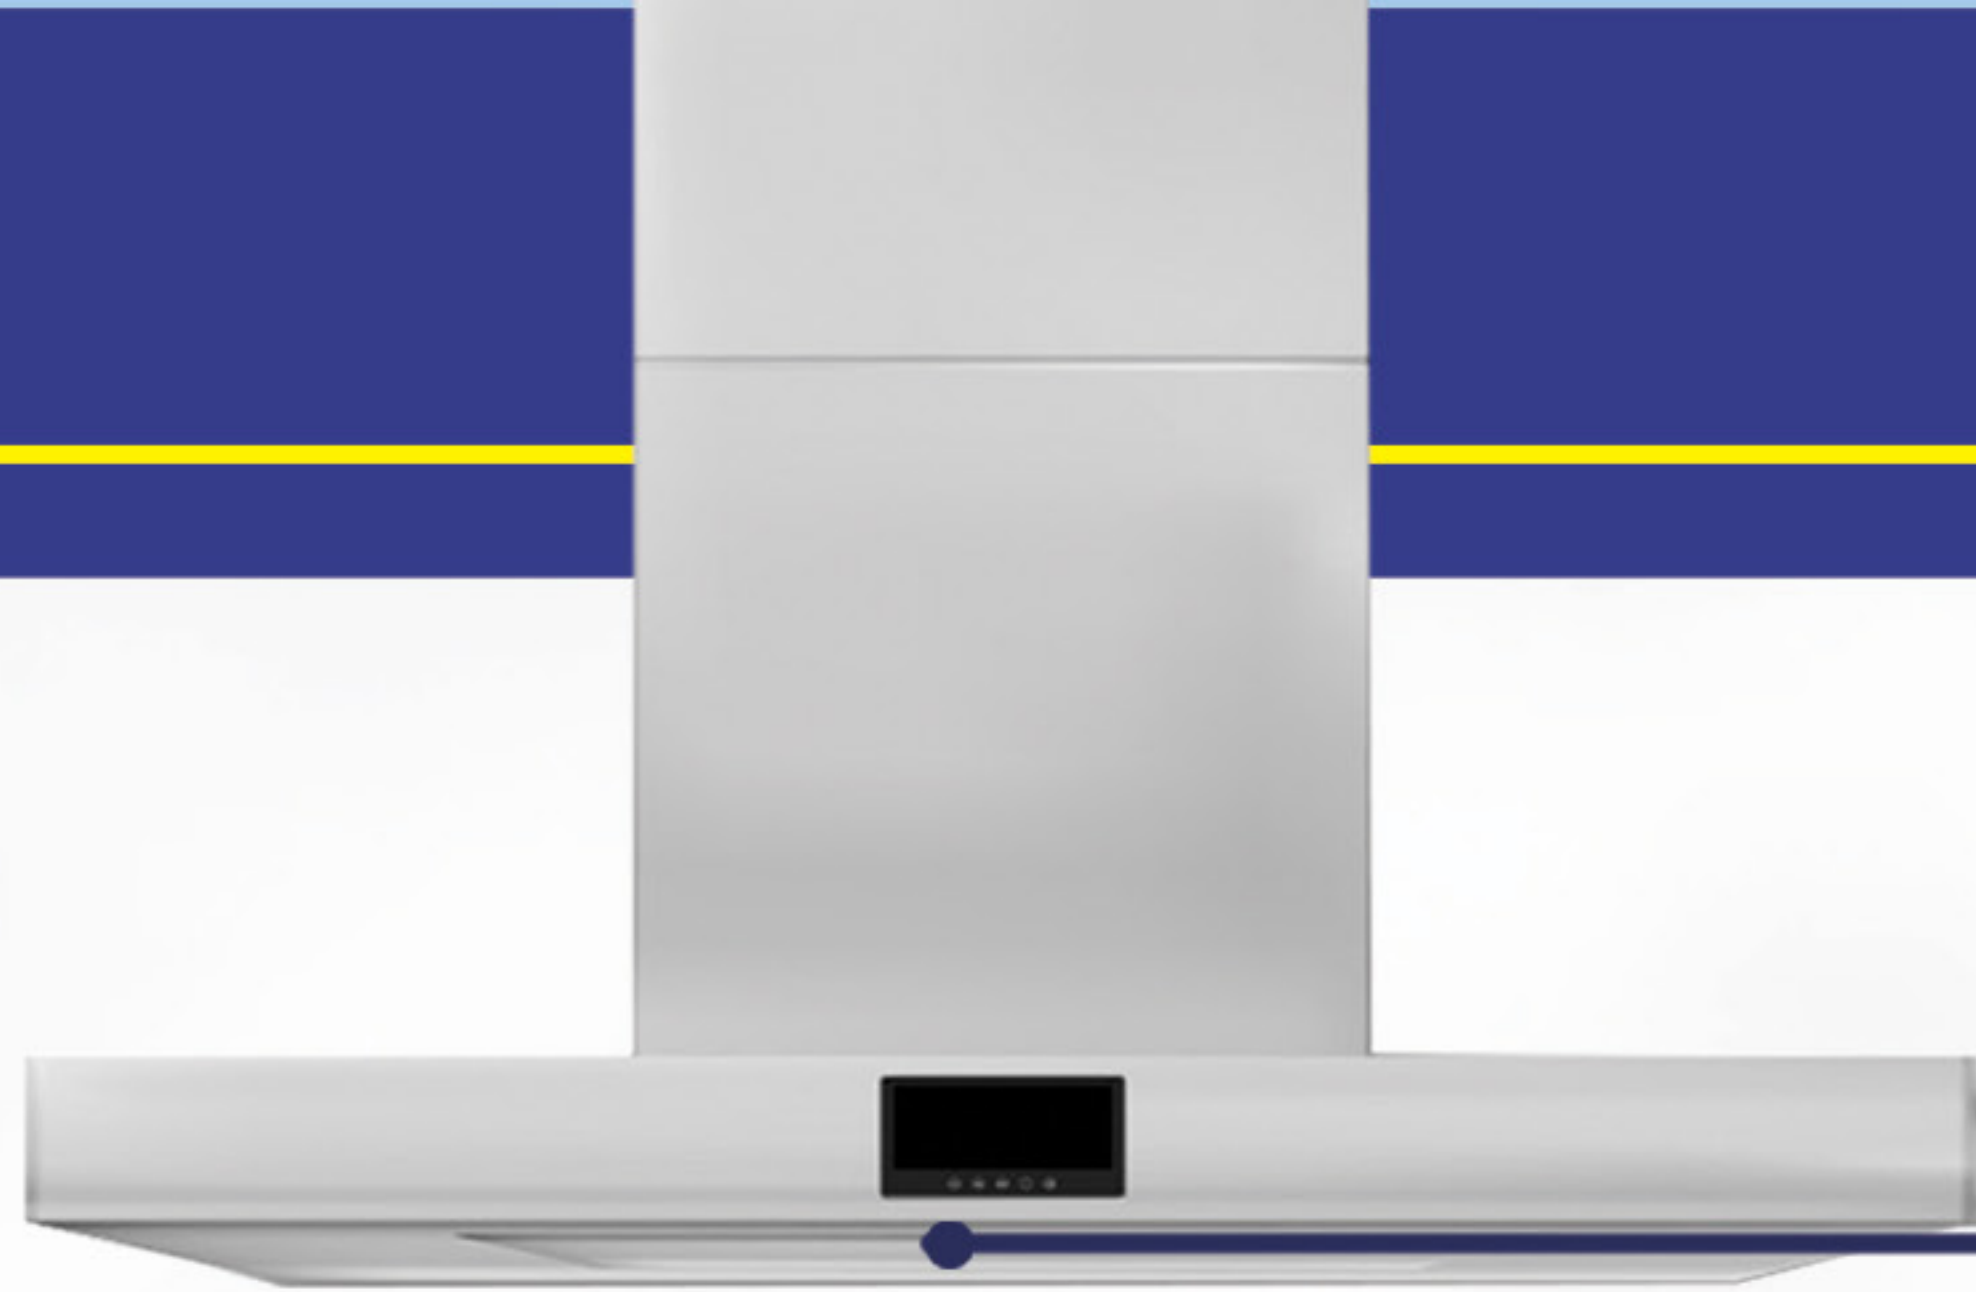

Flame Retardant Compounds

Our flame retardant (FR) compounds are designed to enhance safety and performance in a variety of applications. By incorporating advanced flame-retardant additives, our compounds provide excellent fire resistance without compromising the mechanical and thermal properties.

Key Features:

- **Superior Fire Resistance**

Our FR compounds can meet the UL94 standard in the V0-V2 range and the GWFI from 650°C to 850°C according to the customer's needs.

- **Eco-Friendly Options**

We offer halogen-free flame retardant solutions that minimize environmental impact.

- **Customizable Formulations**

- We could customize our flame-retardant compounds based on your processing and physical mechanical requirements.

- **Compliance with Standards**

Our products comply with global safety regulations such as UL94, GWFI, and needle flame.




Product name	Polymer	Tensile (MPa)	Izod Impact, notched (KJ/m2)	GWFI (°C)	UL94 Rating
BATOMID 6 FR-10W	Polyamide6	70 ± 5	5 ± 0.5	850	V0
BATOMID6 FR-35W	Polyamide6	70 ± 5	5 ± 0.5	650	V0
BATOMID6 FR/GF-20W	Polyamide6	85 ± 5	6 ± 0.5	750	V0
BATOMID66 FR-NR	Polyamide66	90 ± 5	6 ± 0.5	750	V0
BATOLEN FR-10B	Polypropylene	85 ± 5	6.5 ± 0.5	750	V0
BATOLEN FR-20B	Polypropylene	85 ± 5	6.5 ± 0.5	850	V0
BATOLEN FR-30B	Polypropylene	85 ± 5	6.5 ± 0.5	650	V2
BATONAT FR-NR	Polycarbonate	56 ± 5	7 ± 0.5	850	V0




Functional Polypropylene (PP) Compounds

As a leading manufacturer, we offer high-performance fiber-reinforced, filled and special polypropylene (PP) compounds. our compounds are designed to meet household appliances and electrical and electronic parts. Our polypropylene compounds are developed through advanced manufacturing processes and rigorous quality control to ensure that they meet the highest require standards.

Light Efficiency: $\geq 97 \text{ lm/W}$
GWFI: 650°C

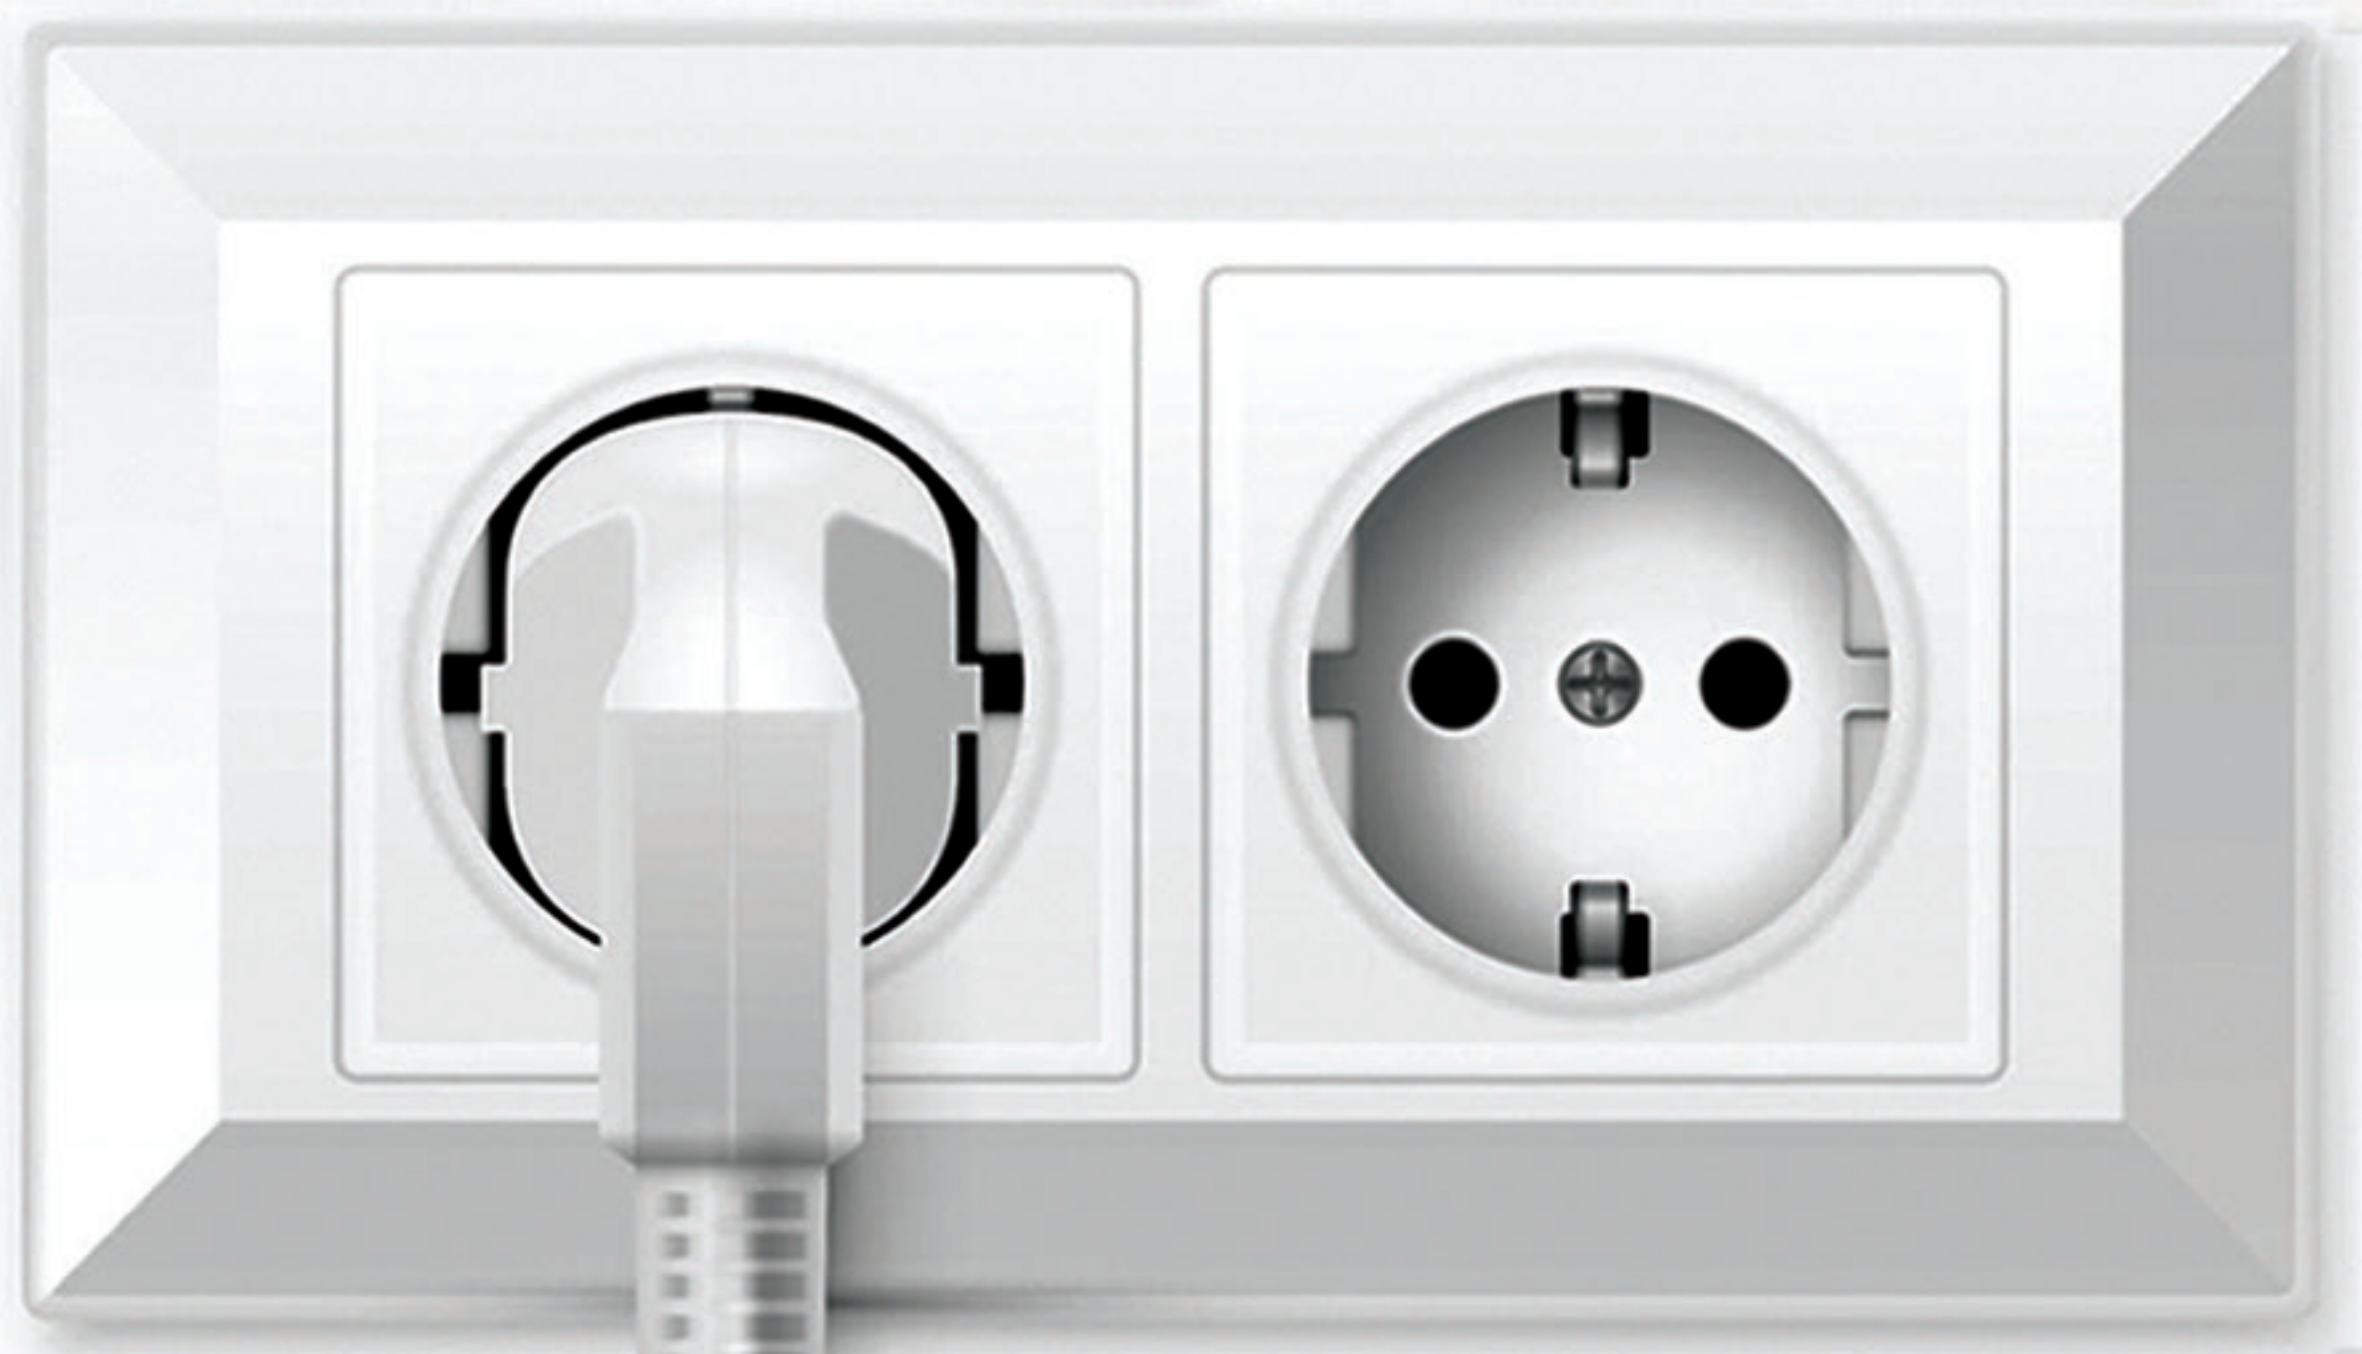


	Product name	Additive (%)	Tensile (MPa)	Elongation (%)	Izod Impact, notched (KJ/m2)
Fiber-reinforced	BATOLEN CP30 N-B	30	75 ± 5	9	14 ± 1
	BATOLEN RCP30-B	30	50 ± 5	6	11 ± 1
	BATOLEN HP40 N-B	40	90 ± 5	6	10 ± 1
	BATOLEN HP30 N-B	30	75 ± 5	5	8 ± 0.5
	BATOLEN RHP30-B	30	67 ± 5	4.5	6 ± 0.5
Mineral Filled	BATOLEN H20tn	20	24 ± 5	15	3.5 ± 0.5
	BATOLEN H40tn	40	19 ± 5	7	3 ± 0.5
	BATOLEN HPW60	55	20 ± 5	5	4 ± 0.5
Diffuser	BATOLEN LED-FR	10	25 ± 5	9	7 ± 0.5

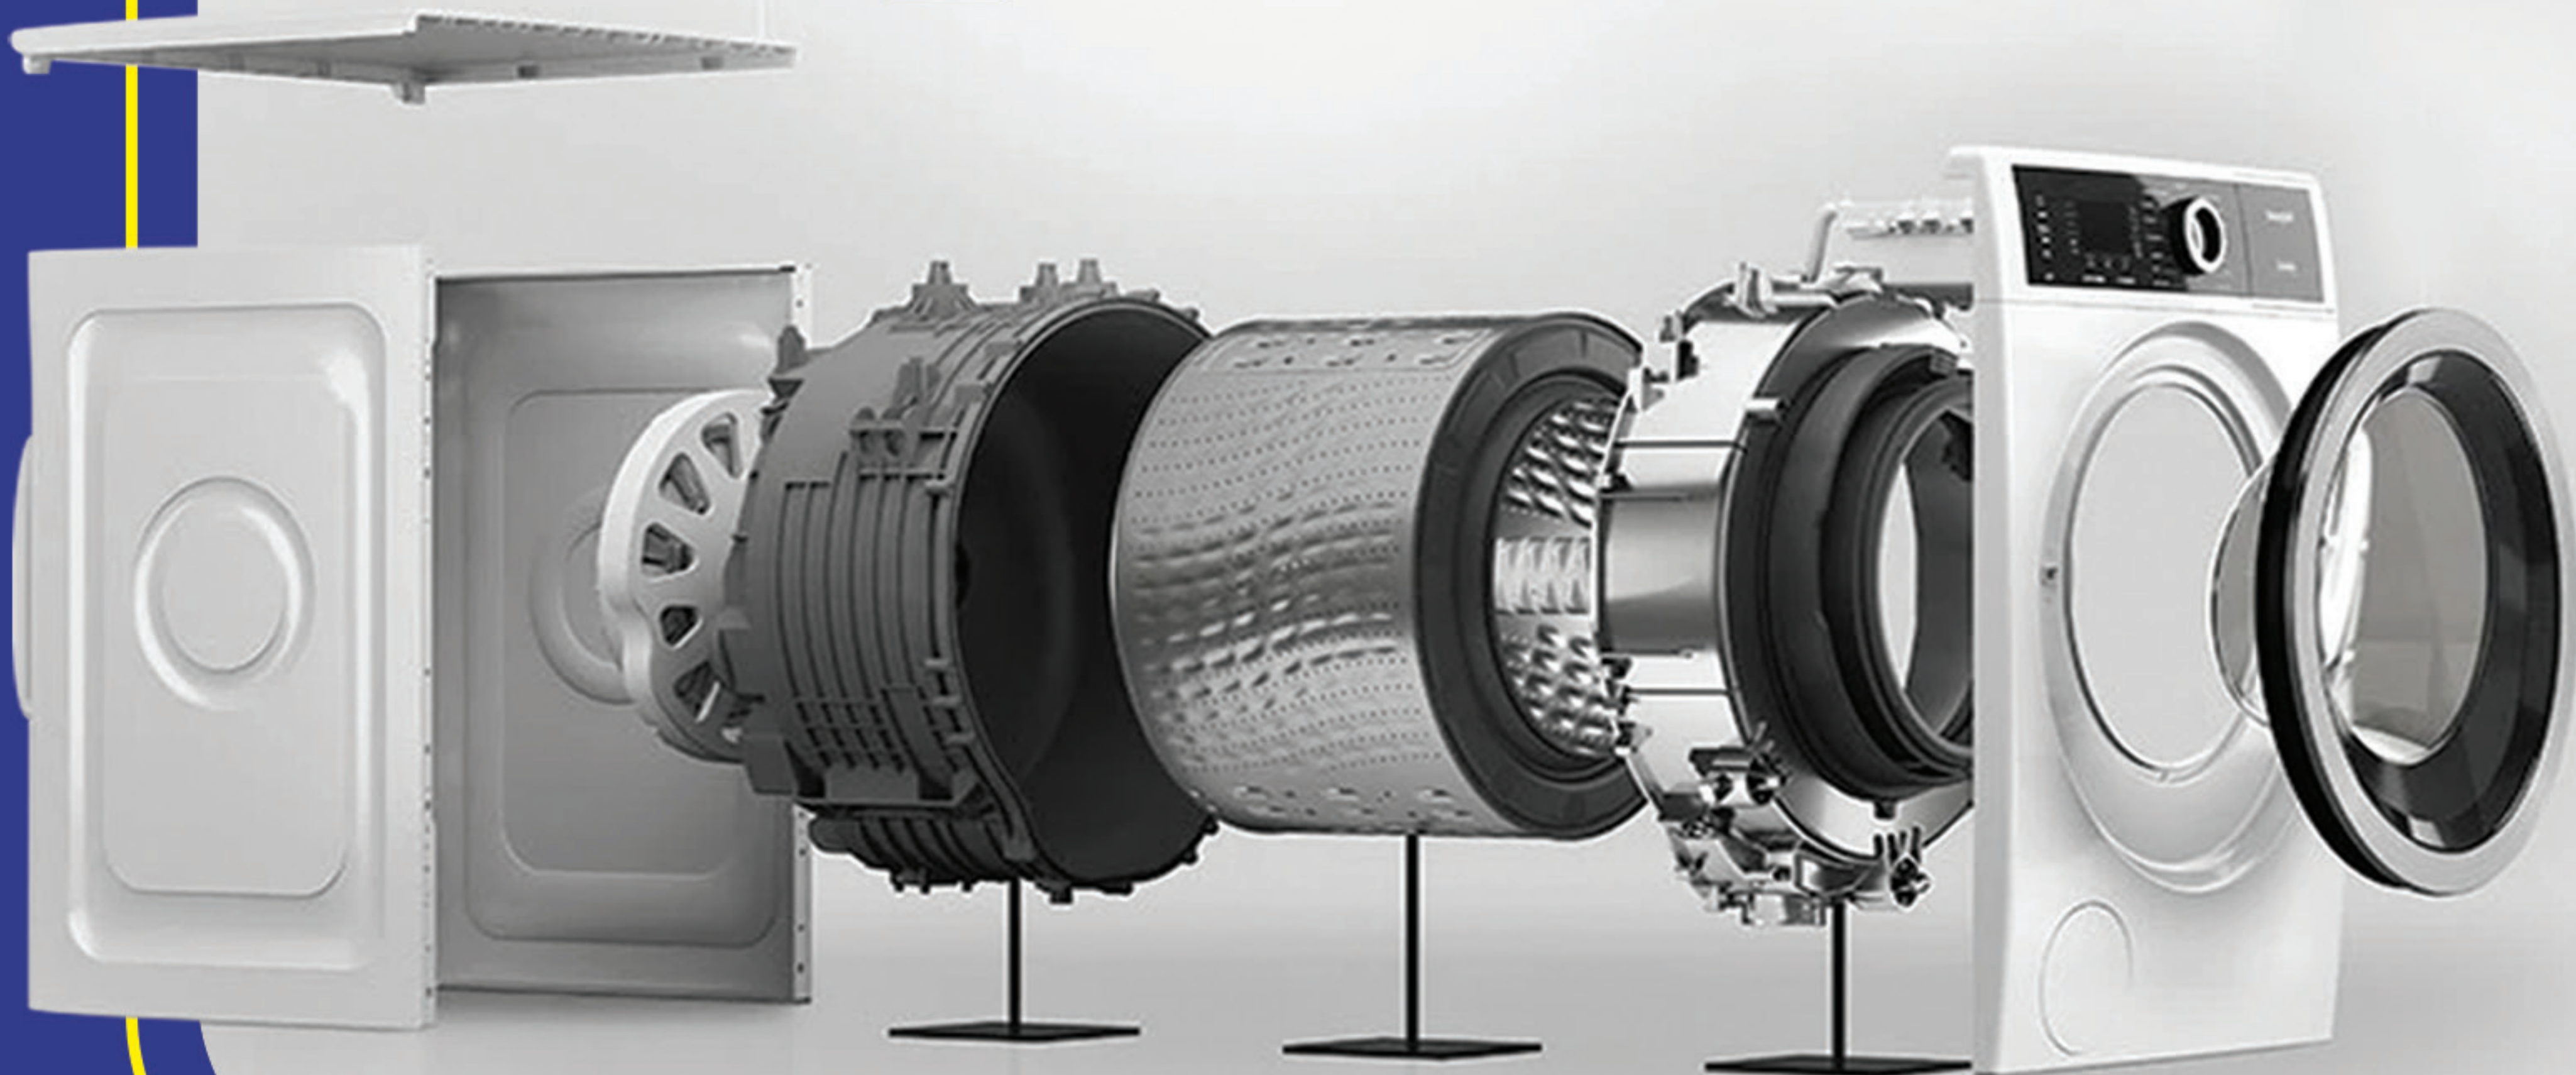


High Performance Polyamide (PA) Compounds

BATOMID Compounds are a range of polyamide compounds based on PA6, PA66, and PA6/PA66 blends. Our BATOMID compound series could meet required mechanical and physical properties. Due to its unique formulations and excellent properties including proper exceptional tensile strength, high stiffness and thermal stability have various industries such as home appliances, electricity and electronics, railways, automotive industries and more. By recognizing and realizing the goals of various industries, we offer polyamide compounds including glass fiber-reinforced in the BATOMID products group.

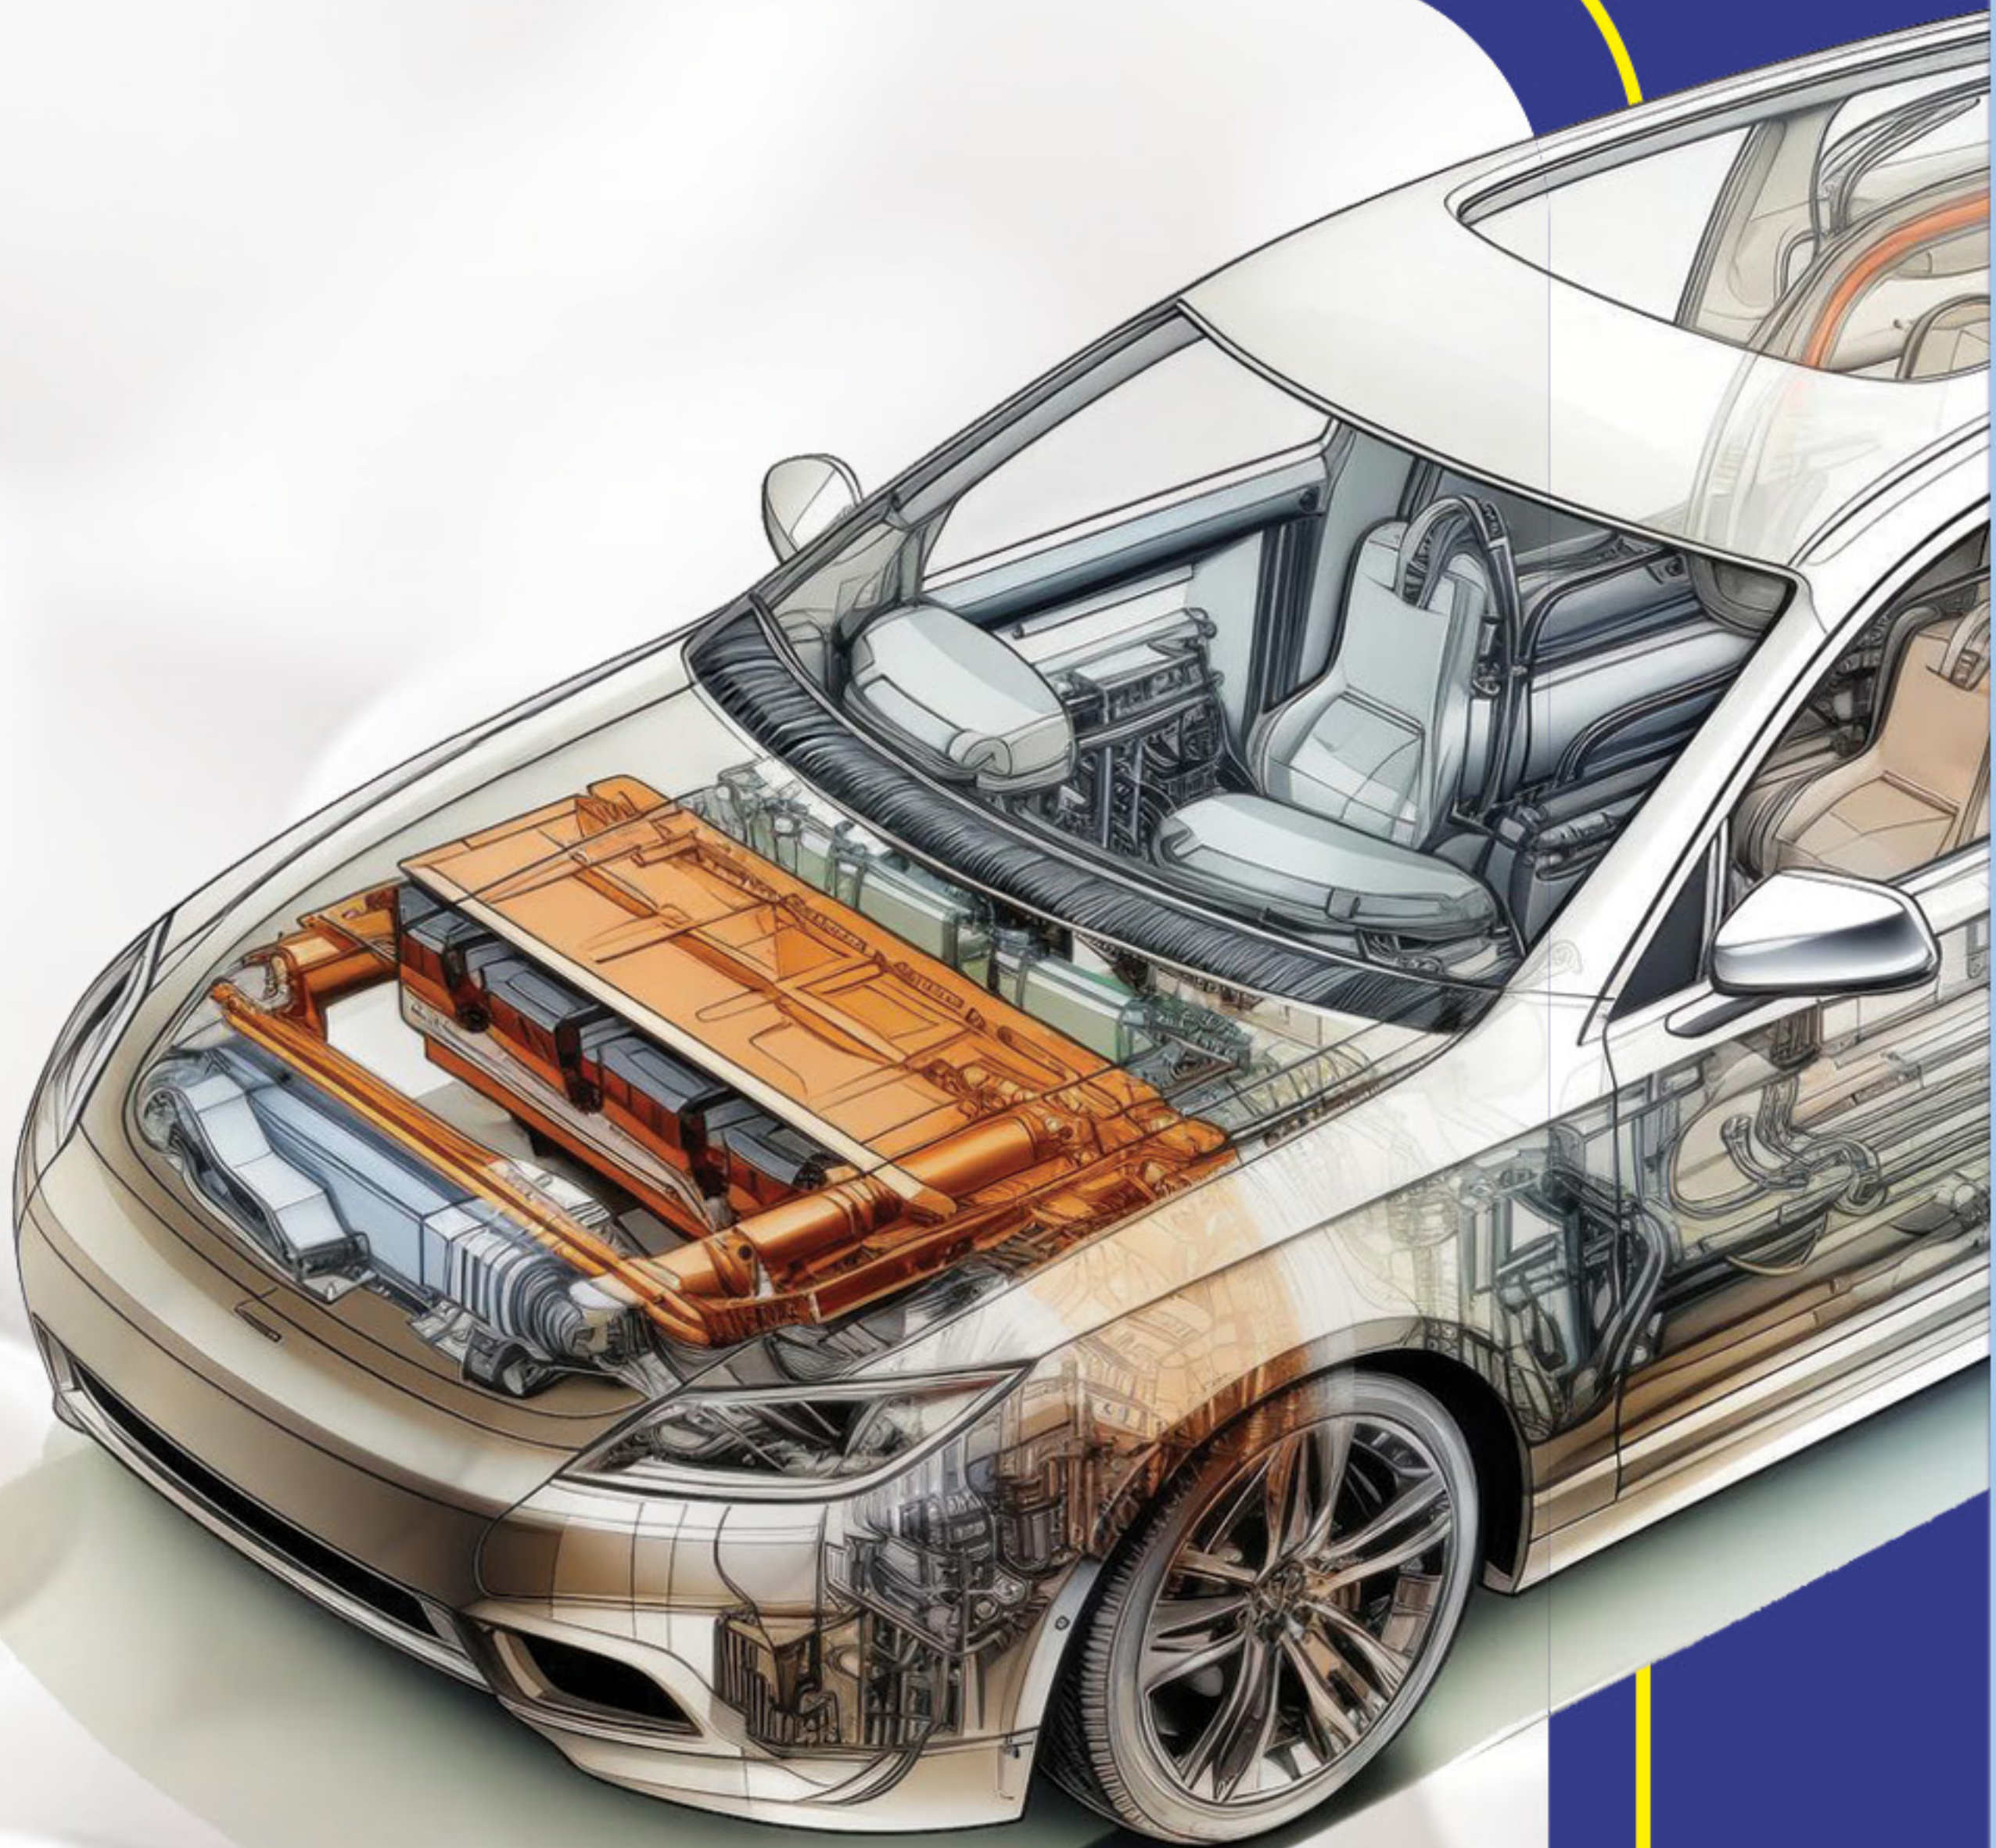

Fiber-reinforced Compound

Product name	Additive (%)	Tensile (MPa)	Elongation (%)	Izod Impact, notched (KJ/m2)
BATOMID6 GF30-180NRH1	30	180 ± 10	3	16 ± 1.0
BATOMID6 GF30-120NRH	30	120 ± 5	3	10 ± 1.0
BATOMID6 GF30-612 B	30	140 ± 10	3	11 ± 1.0
BATOMID66 GF30-T7	30	85 ± 5	3	6.5 ± 0.5
BATOMID66 GF30-150 NRH	30	175 ± 10	4	14 ± 1.0
BATOMID66 GF25-140B	25	140 ± 5	6	10 ± 1.0
BATOMID66 GF20-130B	20	130 ± 5	6	6.5

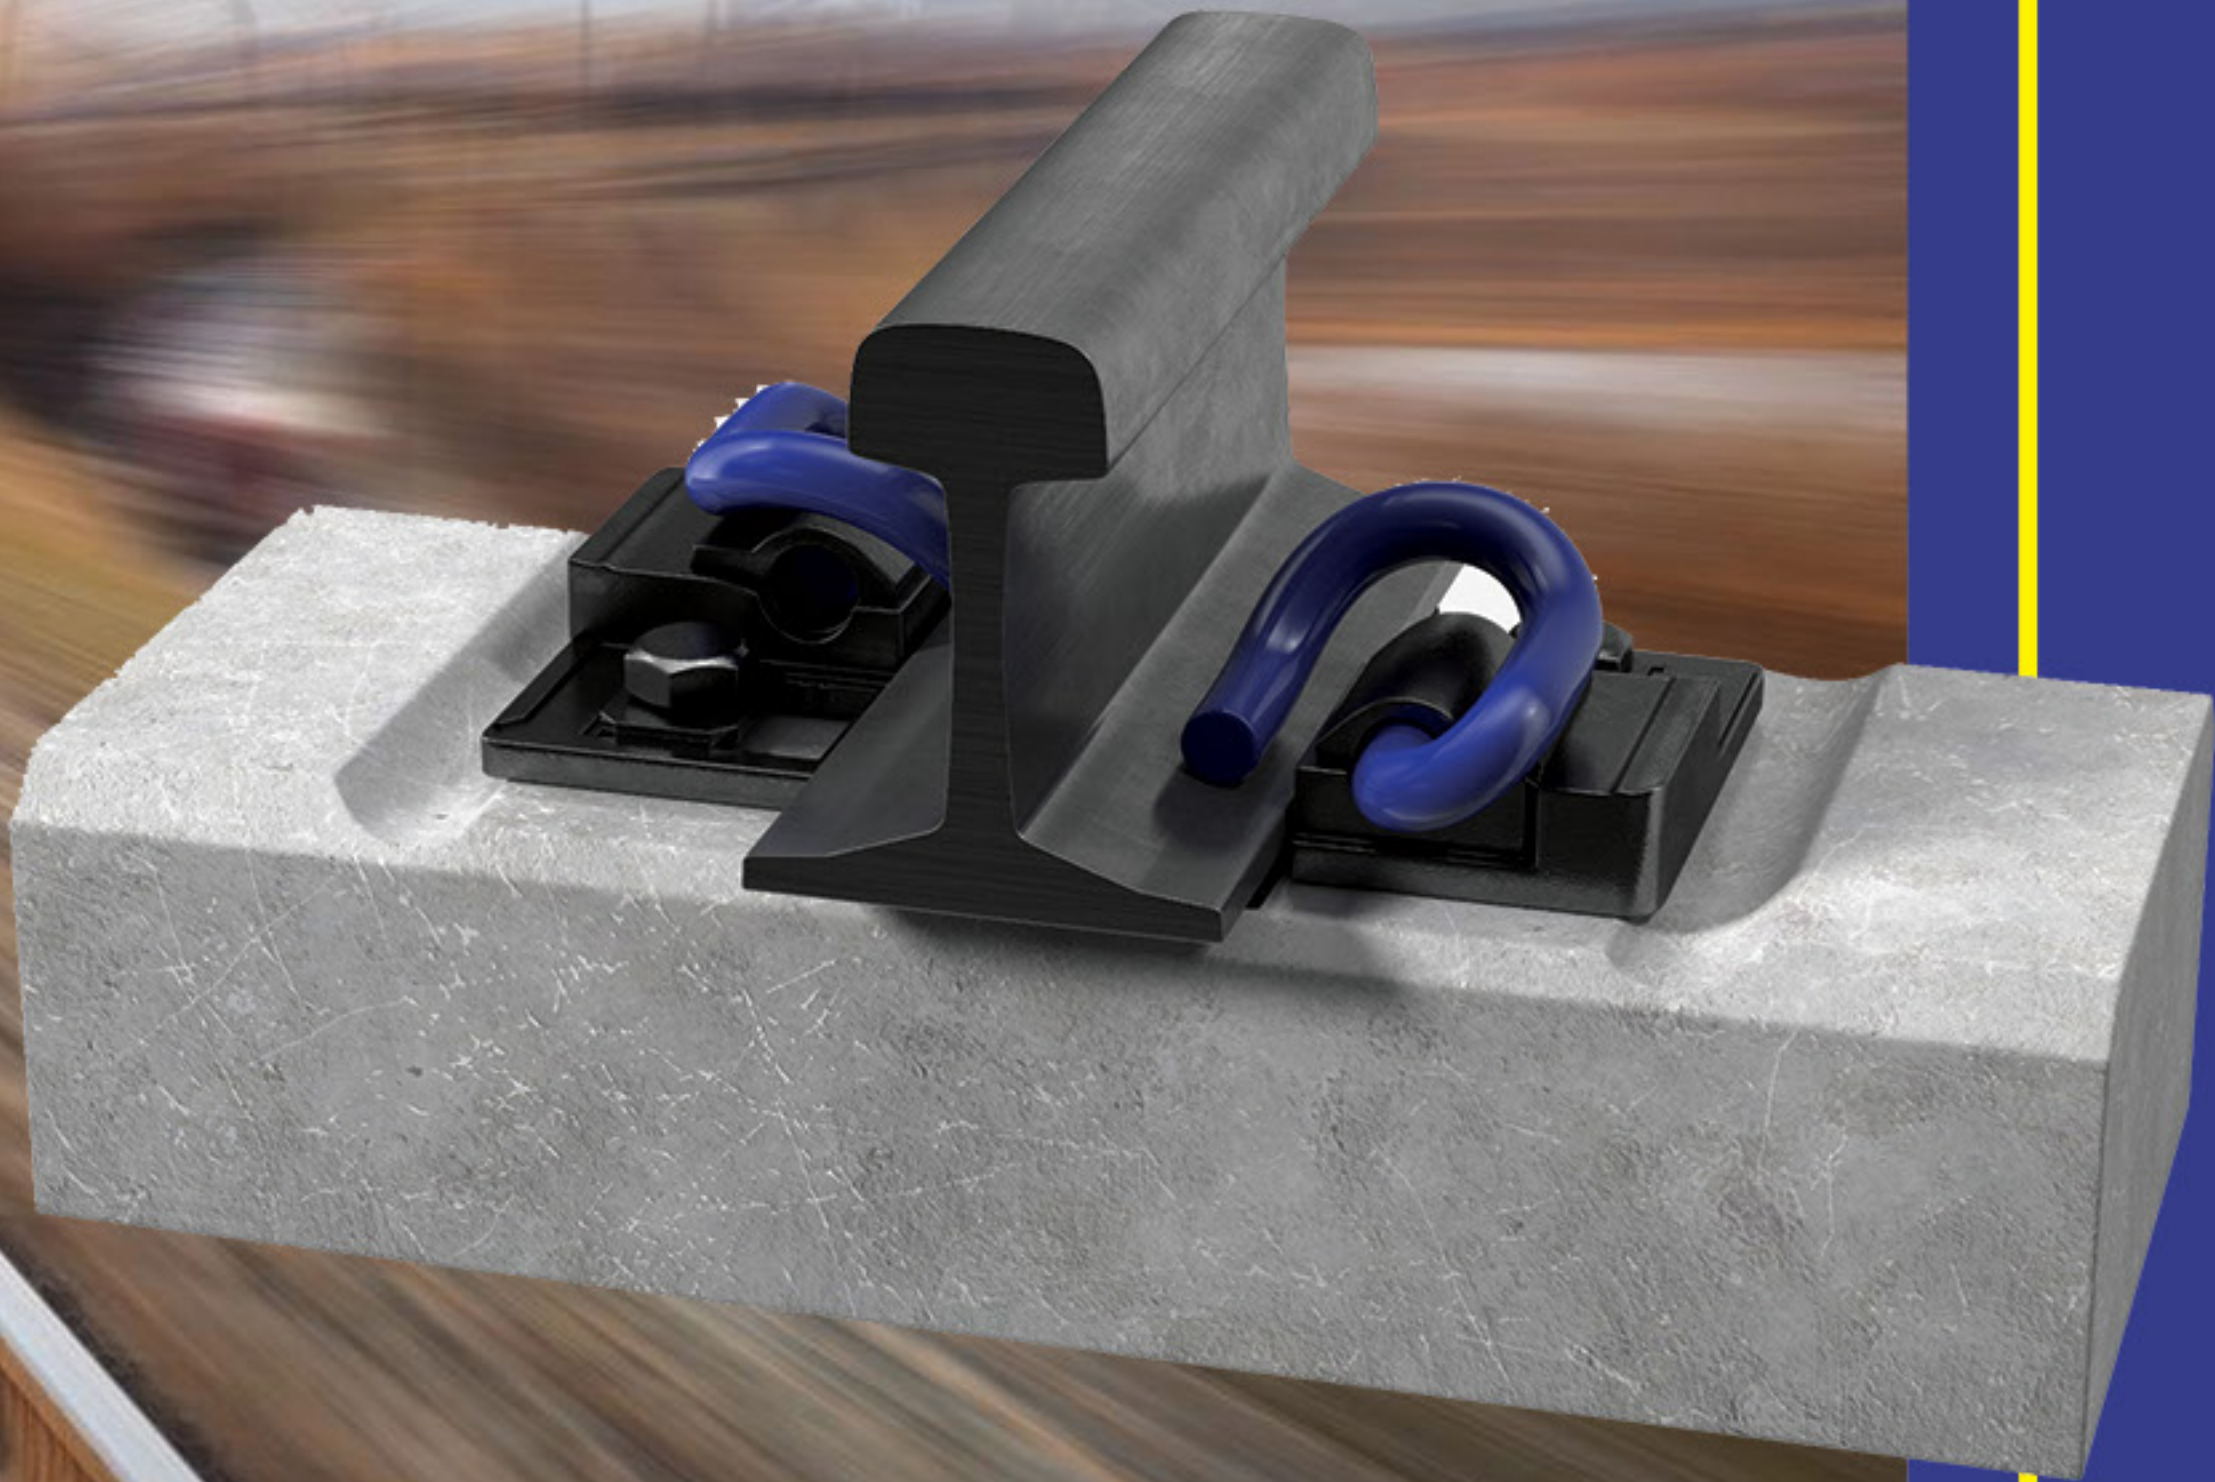

Polyurethane

Batopol Polyurethane materials offer excellent mechanical and thermal properties, a low K factor, and superior water repellency which makes it a suitable choice for a wide-range of applications.
Our polyester polyols are designed to meet the requirements of the rigid foam industry, ensuring outstanding mechanical properties, thermal insulation, and dimensional stability.

Polyurethane Systems

Product name	Description	Viscosity (°C) CPS	Cream Time (sec)	Gel time (sec)	Tack free time (sec)	Free rise density (kg/m3)	Application
BATOPOL-SPF30B2	formulated polyol	600±100	5±2	12±2	15±10	30±2	Spray System
BATOPOL-WF150	rigid polyurethane foam system	800 ± 200	30±5	130±5	150±10	140±5	Decorative Wood Imitation System
BATOPOL-PIP9000	formulated Polyol	800 ± 200	40±5	130±10	200±20	45±2	Pipe In Pipe System
BATOPOL-HF1100	formulated Polyol	800 ± 100	30±2	120±5	180±10	38±2	Air Ducts
BATOPOL-HF40	Formulated polyol	600 ± 100	17±2	90±5	110±5	40±2	Refrigerator
BATOPOL-AD50	adhesive system	600 ± 100	15±2	50±5	60±10	50±5	ADHESIVE

Polyester Polyols

Product name	Viscosity (25 °C) (mPas)	Hydroxyl number (mgKOH/g)	Moisture %w	Functionality	Acid value	Application
PES 300	1800-2200	290±1	<0.1	2.07	<1	Rigid Foam
APG 400	6000-7500	390±20	<0.1	2.7	<1	Rigid Foam
PES 300H	4800	270±10	<0.1	2	<1	Rigid Foam



About Us

Baspar Tose'e Davam Shimi specializes in producing engineered compounds and polyurethane materials, driven by an innovative and expert team of young professionals. As a knowledge-based company with over a decade of experience, we have developed groundbreaking inventions across various fields of polymeric materials. Our commitment to creative thinking fuels our passion for developing new and innovative products.

At Baspar Tose'e Davam Shimi Company, we are dedicated to providing high-quality polymeric compounds for a wide range of applications across various industries, including lighting and electrical, home appliances plus railway and automotive. Our strong commitment to innovation and quality drives us to create different products designed to meet our customers' needs.

We also specialize in the production of polyurethane raw materials for insulation industry. Our formulated polyols, with diverse functionalities, are designed to produce rigid polyurethane foam suitable for different applications such as sandwich panels, construction and building, air ducts, and decorative designs and decorative wood imitation.



 Unit 13, No.17, East Ghobadian St., Nelson Mandela (Africa) Blvd., Tehran-Iran Postal Code: 19176-34637

 (+9821) 4332 40 00 (+9821) 8865 4599

 www.batomer.com  bt.davamshimi@gmail.com

