



PROFESSIONAL TOOLS & EQUIPMENT FOR HVAC/R TECHNICIANS



2027

Catalog v1.0

White Insulated Line Set with Flared Nuts

Copper line set with insulation cover consisting of embossed polyethylene film, weather-resistant materials and thick insulating cotton. This three-layer insulated line set is corrosion, water, shock and fire resistant, flame retardant, sound absorbent, heat insulated and durable. The temperature range is -40°F~248°F (-40°C~120°C). It is UV resistant and meets ASTM E84, UL94. The 99.9% pure copper is compliant with C12200 standards. It is specially soft annealed and easy to bend.



1438W25F
1412W25F
1438W50F
1412W50F

Model	
1438W25F	1/4" LL x 3/8" SL Refrigerant Line Set, 1/2" White Insulation, 25Ft, w/ Flared Nuts
1412W25F	1/4" LL x 1/2" SL Refrigerant Line Set, 1/2" White Insulation, 25Ft, w/ Flared Nuts
1438W50F	1/4" LL x 3/8" SL Refrigerant Line Set, 1/2" White Insulation, 50Ft, w/ Flared Nuts
1412W50F	1/4" LL x 1/2" SL Refrigerant Line Set, 1/2" White Insulation, 50Ft, w/ Flared Nuts

Black Rubber Insulated Line Set with Flared Nuts

With the characteristics of corrosion resistance, fire resistance, flame retardancy, heat insulation, water resistance, shock resistance, sound absorption and durability, this line set is ready for any job. The temperature range is -40°F~248°F (-40°C~120°C). It is UV resistant and meets ASTM E84, UL94. The 99.9% pure copper is compliant with C12200 standards. It is specially soft annealed and easy to bend.



1438B25F
1412B25F
1438B50F
1412B50F

Model	
1438B25F	1/4" LL x 3/8" SL Refrigerant Line Set, 1/2" Black Insulation, 25Ft, w/ Flared Nuts
1412B25F	1/4" LL x 1/2" SL Refrigerant Line Set, 1/2" Black Insulation, 25Ft, w/ Flared Nuts
1438B50F	1/4" LL x 3/8" SL Refrigerant Line Set, 1/2" Black Insulation, 50Ft, w/ Flared Nuts
1412B50F	1/4" LL x 1/2" SL Refrigerant Line Set, 1/2" Black Insulation, 50Ft, w/ Flared Nuts

Thermal Imaging Camera

ATC100 / ATC200

POWERLYNX thermal cameras help HVAC technicians find hidden problems fast without tearing into walls or shutting down systems. Offering two models with either 120x90 or 256x192 infrared resolution, they provide fast and accurate thermal imaging of the entire field instead of just spot temperature. It highlights the highest and lowest temperature spots in the field to assist with fast diagnosis and trouble-shooting of HVAC systems.



Model	ATC100	ATC200	Model	ATC100	ATC200
Infrared resolution	120x90	256x192	Display size	2.8" (240x320)	
Field angle	56°x42°		Device storage	Built-in 4G eMMC	
NETD	≤ 50 mk		Storage Image / Video Format	JPG / MP4	
Temperature measurement range	-4°F to 1022 °F		Image / video export method	USB to computer	
Temperature range setting	Low temp -4°F to 302°F, high temp 212°F to 1022°F		Image analysis function	Support offline analysis on PC	
Infrared response band	8 to 14 um		Protection grade	IP54	
Pixel size	12 um		Battery Type	Removable Rechargeable Lithium Battery (18650)	
Thermal imaging frame rate	≤ 25 HZ		Battery capacity	2000 mAh	
Lens focal length	3.2 mm		Working time	Approx. 8 hrs	
Emissivity setting	Adjustable from 0.01 to 1.00		Power interface	Type-C	
Measurement accuracy	-4 °F ~ 1022 °F, ±3.6 °F/2%		Power configuration	5 minutes / 20 minutes / no automatic shutdown	
I FOV	3.75 mrad		Work temperature	32°F to 113 °F	
Focus mode	Not focusing required		Storage temperature	-4°F to 140°F	
Temperature measurement mode	Center point / hot and cold spot tracking		Relative humidity	10% to 85% RH (non-condensing)	
Color palette	Rainbow, iron, cold color, white hot, black hot		Product weight	0.83 lbs (375 g)	
Image display mode	Infrared / visible light / dual light fusion		Product size	3.8"x2.8"x8.9" (96mmx72mmx226mm)	


Condenser Fan Motor

ACM216 / ACM214 / ACM2M1

A heavy-duty, weather-resistant electric motor designed to drive HVAC condenser unit fan blades. Restoring proper airflow across condenser coils, preventing system overheating, and ensuring efficient heat transfer and cooling performance for residential or commercial air conditioning and refrigeration systems.



- Universal fit with NEMA Frame 48
- Class B insulation
- 70°C/158°F
- Reversible rotation
- Thermal overload protection
- Totally enclosed
- UL recognized

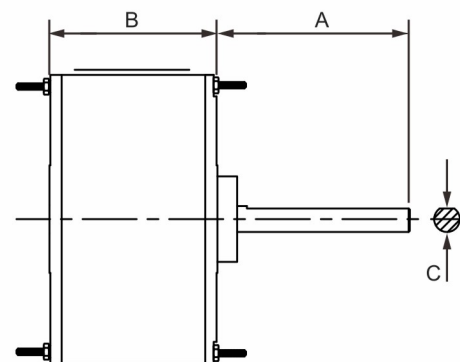

Single Speed

Model	HP	VOLTS	AMPS	RPM	CAP	ENCL.	BRG.	DIMENSIONS		
								A	B	C
ACM216	1/6	208-230	0.9	1075	5µF/370V	TEAO	Ball	6.5"	4.53"	1/2"
ACM214	1/4	208-230	1.8	1075	5µF/370V	TEAO	Ball	6.5"	4.53"	1/2"

Multi-Horsepower

Model	HP	VOLTS	AMPS	RPM	CAP	ENCL.	BRG.	DIMENSIONS		
								A	B	C
ACM2M1	1/6-1/3	208-230	2.8	1075	7.5µF/370V	TEAO	Ball	6.5"	4.53"	1/2"

Brazing Torch

AT1 LMP

High heat torch, for brazing, soldering and welding, boasts a swirl flame that remains stable even when inverted, delivering maximum heat output. It is ideal for HVAC technicians and installers.

- Auto start/stop ignition, instant cutoff and auto flame lock to keep torch lit for finger-free use.
- Strong & swirl flame provides greater heat and more uniform heat distribution for soldering and brazing.
- For best performance, use with 14.1 oz MAP-PRO gas. Propane is also suitable with lower heat.
- Stainless steel tip and rugged brass & aluminum inner design to avoid gas leakage.
- Advanced gas control system to easily adjust flame for different applications.
- Stable flame for consistent performance when tilted or momentarily inverted.



Utility Torch

AT1 P

- Designed for simple soldering job and small areas of automotive service.
- For best performance, use with 14.1 oz Propane.
- Control valve makes it easily to adjust the flame.
- 100% rugged brass inner structure avoids the gas leakage.



Manifold Gauge

AG2MA / AG2MB / AG4MA / AG4MB

POWERLYNX manifold gauges are designed for HVAC professionals with today's most popular refrigerants. Robust and impact-resistant, with a 3-1/8" large dial, they are easy to read and designed for a long service life. A premium aluminum body offers high-quality and durability with a sight glass provided for convenience and accuracy.



AG2MA / AG2MB



AG4MA / AG4MB

Model	AG2MA	AG2MB	AG4MA	AG4MB
Type	2-Valve	2-Valve	4-Valve	4-Valve
Refrigerant Type	R410A, R32, R454B, R22	R32, R454B, R410A, R22	R410A, R32, R454B, R22	R32, R454B, R410A, R22
Gauge Size	3-1/8"			
Pressure Range	-30 inHg to 800 psi, High-Pressure Side -30 inHg to 500 psi, Low-Pressure Side			
Package	Carrying Case			

Refrigerant Hose Set

ARH5S / ARH5SV

Suitable for R410A, R32, R22 and most other commonly used refrigerants. 1/4" SAE fittings with 45-degree bend on one end makes it easy to connect. The universal replaceable gasket provides leak-proof service for technicians.



ARH5S



ARH5SV

Model	ARH5S	ARH5SV
Ball Valve	without Ball Valve	with Ball Valve
Pressure Scale	800 psi working pressure, 4000 psi burst pressure.	
Length	5'	
Connector	1/4" - 1/4"	

Flaring Tool

AHF6

With an eccentric cone design the flaring tool gives an accurate and smooth 45-degree flaring. The inner spring design to stop the cone advancing after the flaring is done. Easy to operate this tool is a must for any installer. Nickel plating makes it robust and durable.



Model	AHF6
Tube OD	1/4", 5/16", 3/8", 1/2", 5/8", 3/4"

Tube Expander

AHE7

Simple structure and foldable design make this tool easy to carry and even easier to use on copper tubing 1/4" to 7/8".



Model	AHE7
Tube OD	1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8"

Tube Straightener

AHS2 / AHS3

Accurately straightens soft copper tube from a coil prior to installation. It can also be used to straighten the annealed aluminium, steel, brass and other tubes.



Model	AHS2	AHS3
Tube OD	1/4"	3/8"

Tube Cutter


AHC6C / AHC11C / AHC12

Precise Cuts Every Time

With sharp cutting blade, ball bearings and aluminum alloy body, it makes tube cutting easy and efficient.



AHC6C



AHC11C



AHC12

Model	AHC6C	AHC11C	AHC12
Tube OD	1/8"~3/4"	3/16"~1-1/8"	1/8"~1-1/4"
Blade Diameter	0.7" (18mm)	0.9" (23mm)	1.2" (30mm)

Internal & External Reamer

AHR30

Made of high quality aluminum alloy, this dual action hand tool designed to quickly remove sharp burrs and bevel the inside (ID) and outside (OD) edges of cut metal or plastic pipes. It ensures smooth, clean, and professional tube ends for secure fittings in plumbing, HVAC, and mechanical work.



Model	AHR30
Tube OD	1/8"~1-1/2"

Tube Deburring Tool

AHD20

Easy to operate deburring tool also comes with 2 spare blades.



Ratcheting Wrench

AHW3 / AHW5 / AHW4


Dual direction operation (CW & CCW) to fit all types of working conditions.




Model	AHW3	AHW5	AHW4
Sizes	3/16", 1/4", 5/16", 3/8", with Hex Key Adapter	3/16", 1/4", 1/2", 9/16", with Hex Key Adapter	Hex Key Adapter 3/16"x5/16"

Folding Utility Knife


AK1

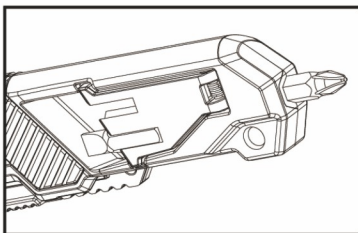

Both Phillips and slotted screwdriver available.

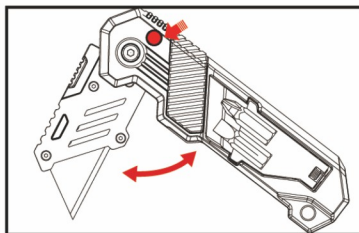


Press lock button, flip to open or close.

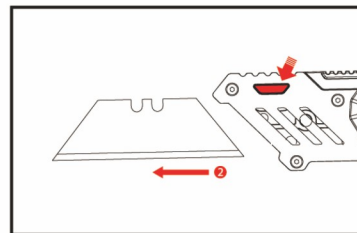


Press release button. Remove dull blade. Insert new blade.

Dual-blade Folding Knife

AK2

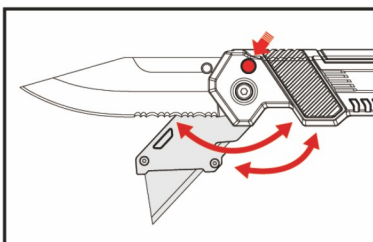

Press lock button to open or close.

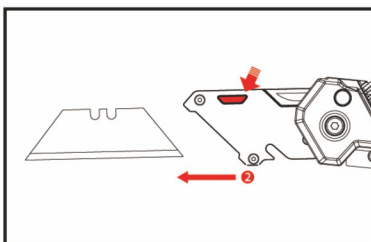

Press release button. Remove dull blade. Insert new blade.

LED Penlight **AL1**

Ultimate tool for reliable illumination, it features a rechargeable lithium battery with up to 2 hours of runtime and long-distance lighting that reaches up to 330 feet. It offers an extra bright 300 lumens output and three adjustable lighting modes (High, Low, Strobe) for customized brightness. Additionally, it is compatible with AAA batteries for convenience. Designed for portability, it includes a 2-way clip, a hidden Type-C charging port, and boasts an IP44 rating for water and dust resistance, making it perfect for any indoor or outdoor use.



AL1

Model	AL1
Modes	High, Low, Strobe
Light Output	300 Lumen
Rechargeable Battery	350mAh, 3.7V
Range	330'
Protection Rate	IP44
Working Time	1 Hour(High Mode), 2 Hours (Low Mode)
Dimensions	4" x 5/8" x 5/8"

LED Headlight **AL2**

Perfect companion for your lighting needs, it features five lighting modes easily controlled with an induction sensor for wave control. Equipped with a Type-C rechargeable lithium battery, it offers up to 6 hours of continuous use. With an extra bright 350 lumens output and long-distance illumination up to 330 feet, this headlamp ensures superior brightness. Its adjustable headband is made of breathable and stretchable material, providing a secure comfortable fit for all-day wear. Additionally, the COB LED with the latest technology guarantees consistent and reliable lighting. The IPX3 rating makes it resistant to water splashes, making it ideal for variety of scenarios.



AL2

Model	AL2
Modes	High (COB), Low (COB), High (Spot), Low (Spot), Strobe
Light Output	350 (Spot), 175 (COB)
Rechargeable Battery	1200, 3.7
Range	330 (Spot), 50 (COB)
Protection Rate	IPX3
Working Time	4 Hour(High Mode), 6 Hours (Low Mode)
Dimensions	11-3/4" x 11-3/4" x 1-5/16"
Weight	2.5 oz



Powerlink Inc.

Secaucus, New Jersey 07094

Tel: 888-818-POWER (7693)

Email: Info@PowerlinkUS.com

www.PowerlinkUS.com