A Class of it's own...

TEKNOLITE®

LED Lighting

Complete Solution for

LED LIGHTING

— LIGHT YOUR MOMENT —

PRICE LIST 2026

www.teknolite.in

Indoor Outdoor Architectural And Commercial Lighting Range...

A Class of it's own...

TEKNOLITE

LED Lighting

TEKNOLITE Led Panel Lights with CCT change and dimming option are made with state of art technology. CCT and dimming can be changed by remote. Also CCT can be changed by switch.

TEKNOLITE Smart lighting are highly energy saving and based on mood lighting concept. As per mood and requirement ambience can be changed. Groups of lighting load can be made on remote as per requirements. These Smart lighting are available in Panel lights, SMD down lights, COB lights, Linear lights & Hanging lights.

ON-OFF CONTROL

Dimming Range : 15% - 100%, No need dimmer

BEAM ANGLES

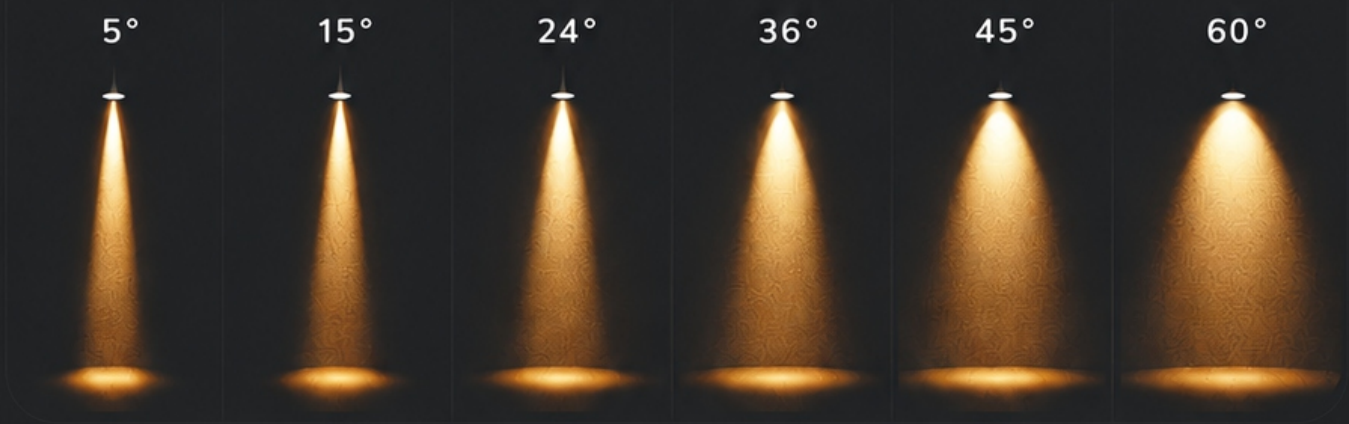

DISCOVER THE PERFECT LIGHT TEMPERATURE WITH TEKNOLITE

On order flicker-free driver available

TEKNOLITE | PHILIPS | OSRAM | FULHANI Harness the power of light | LTE | LTECH | LiFud

Wi Fi | zigbee | KNX | Works with Apple Home | alexa | Smart Life

230V AC | High CRI | Dimmable | 2000K 8000K | tunable WHITE | Bluetooth | WiFi | tuya | 2.4G | RoHS Compliant

A CLASS OF IT'S OWN...

teknolite®

LED LIGHTING

PRODUCT INDEX

PRODUCT / SECTION NAME	PAGE
TN-REMOTE, DRIVER, TUNEABLE DRIVER, PHASE CUT DIMMER, SENSORS	1
RDL-15, RDL-10, ZB, ZD, RCB, JY, NM-DOB, VIVA	2
JV SERIES, JX SERIES — HEAVY ALUMINIUM BODY	3
JV, JX, OLEE, VISCA, ARYA	4
JR, VLP, DV-(L) LIGHT ALUMINIUM, TK-MR16, RC	5
TJ, FLIX, FLIX TWIN, VISION, VISION TWIN, TRUM, TRUM TWIN	6
ES-127, ZM, RF, PRISM — HEAVY ALUMINIUM DIE CASTING	7
EXCLUSIVE SPOTLIGHT SERIES — MV, MV-SF	8
MV, MV-SF, JCB, TS, TEERA	9
ES, CRISP PINHOLE, NOX POLO PINHOLE, ARENA, AMET, VANS IP54	10
BRIVE COB — PREMIUM LED DOWNLIGHT	11
BRIVE, TZF, RANZO, RIO, LUCENTIS, BRONZE, BRONZE TRIMLESS	12
GALAXY, GALAXY IP65, MLE, TEEZA, TISCA	14
ZENO, SHYNE COB, RETRO	16
SPLASH IP65, COMPACT, RL-H TRIMLESS, RL, CB IP54, LEESO	17
PREMIUM URANUS COB — GLAMOUR MIRROR LIGHT	18
URANUS, ELIUX DOWNLIGHT, TIMA, OLIVE, ESTRO, PENCIL	19
ANOX, ANOX-TRIMLESS, ASTERO, ASTERO TRIMLESS, ASTERO PINHOLE, ASTERO ULTRA SLIM TRIMLESS	20
OZONE PREMIUM COB	21
OZONE FIX, OZONE MOVABLE, OZONE TRIMLESS, PLUTO ULTRA SLIM COB, STELLAR PINHOLE	22
CLUB SERIES — CLUB TALL, CLUB TALL TRIMLESS, CLUB TALL SQUARE & DOUBLE VARIANTS	24
GLANZA SERIES	26
CURVE SERIES	27
FLARE SERIES	28
RZR-PINHOLE, RZR TILTABLE, LINEA-SLEEK, RZR, ELY, ASTRA	30
CUBIX-TRIMLESS, DOUBLE & TRIPLE GIMBAL, ES, STROKE, HELIX-SF	31
LUME, LAVIA, BB, BB-S, FN, FN FRAME — SURFACE SPOTLIGHTS	33
STELLA SERIES — LANIX REF, LANIX FOCUS, LANIX SPOT, ORIX REF, ORIX FOCUS, ORIX SP...	35
TRACK ADJUSTABLE SPOTLIGHTS	36
TRACK COB	37
2-WIRE HEAVY ALUMINIUM TRACK CHANNEL & CONCEALED CHANNEL	38
TELESCOPE	39
CANVA SURFACE, SFC, PDL, SFR, SJ — SURFACE CYLINDER LIGHTS	40
NEXUS PREMIUM SURFACE, LUNA PREMIUM IP65, NEXUS SURFACE PINHOLE, BTSFC, BTZ	41
MOON — PREMIUM SURFACE DOWNLIGHT	42
MOON, RDD PRO, CRYSTO DOWNLIGHT, RLD, JDD	43
LB, LZP, LZP-AS-SURFACE, LZP-AS-CC, PZP — PANEL LIGHTS	44
LZP-AS, PZP-SF, LZR, PZR, LB 2*2	45
LB BACKLIGHT, PZP SENSOR, TPF, HANGING WIRE, PSF, BTT	46
MAGNETIC TRACK LIGHTING 5MM, 11MM & 25MM — OVERVIEW	47
5MM MAGNETIC TRACK — PROFILE LIGHT TILTABLE, LINEA LIGHT TILTABLE	48
5MM MAGNETIC TRACK FOLDING PROFILE SMD LINEAR, FOLDING LINEA LIGHT	49
TRACK LIGHT, DUAL TRACK LIGHT	50
TERNARY LIGHT, TRACK LINEA LIGHT	51
ADJUSTABLE SF CYLINDER, TRACK LINEA LIGHT	52
SMD PENDENT SOFT LIGHT, HOSE LIGHT	53
SMD PENDENT EARTH LAMP, SMD PROFILE LIGHT	54

PRODUCT / SECTION NAME	PAGE
DRIVERS, CHANNELS, CABLE BOX, CONNECTERS	55
MAGNETIC FLOOD LIGHT, MAGNETIC GRILL LIGHT	56
MAGNETIC FOLDING GRILL LIGHT, MAGNETIC SPOTLIGHT	57
25MM MAGNETIC TRACK RAIL — RECESSED & SURFACE / PENDANT MOUNTED	60
25MM MAGNETIC TRACK RAIL PROFILE	61
MAGNETIC LINEAR RZR MOVABLE SPOTLIGHTS	62
MAGNETIC PENDANT LIGHTS, MAGNETIC L-CORNER	63
MAGNETIC TRACK JOINERS & ACCESSORIES	64
MAGNETIC TRACK DRIVERS	65
LED STRIP LIGHTS	66
HIGH CRI LED STRIP, RGB STRIP, COB DOTLESS STRIP	67
STDM HIGH BAY, FD GL FLOOD LIGHT, SL GL STREET LIGHT, SL SOLAR, UFO HB	68
WL DECORATIVE WALL LIGHTS	70
WL WALL LIGHTS (CONTINUED) & PML10CC	71
OUTDOOR IP65 WATERPROOF WALL LIGHTS	72
LED GATE LIGHTS — ROYAL, LOBINI, ZEN, FOTON, ORA, ALPINA, ACURA, KEERA, MOON	73
ODL OUTDOOR WALL LIGHTS	74
ODL OUTDOOR WALL LIGHTS	75
ODL OUTDOOR WALL LIGHTS	76
ODL 445 LENS, ODL 407/408, OFL, FL-SENSOR, OCL	80
OFL (CONTINUED), ODL0402, ODL0602	81
POLY-CARBONATE — FLORA, OPAL2, ARIES, LIME, FLOAT, ODL570, ODL560	82
GEO4, OPAL4, FSD, FSD-SQ, ASK ARCHITECTURAL SPIKE LIGHTS	83
BOLARD, GATE LIGHT, SPIKE LIGHT — SOLAR RANGE	85
SOLAR LIGHTS	86
BLL OUTDOOR LIGHTS	87
NEON FLEX STRIP LIGHTING	88
SILICON FLEX PROFILE SERIES	89
SILICON FLEX PROFILE SERIES	90
RECESSED / SURFACE PROFILE — TPF SERIES	91
RECESSED / SURFACE PROFILE (CONTINUED)	92
TREE HUG MODULAR LIGHTS — CUSTOMIZABLE PRICING	94
PIXEL BAR LIGHT TL406 — LINEAR / MEDIA FACADE	95
WALL WASHER SF-24V, WALL WASHER SF-220V, LINEAR INGROUND	96
ROUND FLOOD LIGHTS — TK-RD-FSD SERIES	97

NOTE: COMPANY CAN CHANGE DIMENSIONS, SPECIFICATIONS,& PRODUCT'S DESIGN WITHOUT ANY PRIOR NOTICE.

No-return policy on premium products

Delivery time : 3-15 days

LED LIGHTING

A Class of it's own...

TEKNOLITE®

RM4 REMOTE

Model	Body Colour	Group	Step	Tuning	Dimension (mm)	DLP
RM4	WB	4	WW-CW-NW-SLEEP	2700K to 6500K	130X48X20	850

TEKNOLITE TUYA TUNNABLE & DIMMABLE DRIVER + LED

WATTAGE	8W	12W	15W	20W (AS PER ORDER)
DLP	1335	1335	1335	1890

CCT 3 IN 1 SWITCH OPERATE (SWITCH & BLUETOOTH)

WATTAGE	8W	12W	20W	30W (AS PER ORDER)
DLP	220	290	480	700

PHASE CUT DIMMER (AVAILABLE ON REQUEST)

WATTAGE	8W	12-15W	20-24W	30W (AS PER ORDER)
DLP	960	1020	1430	1770



TEKNOLITE DRIVER

WATTAGE	3-6W	8-12W	15-20W	24-30W	40-50W
DLP	130	220	324	362	674

LED POWER SUPPLY

Voltage	Watt	Amp.	Voltage	Watt	Amp.
12V	36W	3 AMP (50 piece box packing)	24V	36W	1.5 AMP (50 piece box packing)
12V	60W	5 AMP (50 piece box packing)	24V	60W	2.5 AMP (50 piece box packing)
12V	100W	8.3 AMP (50 piece box packing)	24V	100W	4.2 AMP (50 piece box packing)
12V	150W	12.5 AMP (50 piece box packing)	24V	150W	6.3 AMP (50 piece box packing)
12V	200W	16.7 AMP (25 piece box packing)	24V	200W	8.3 AMP (25 piece box packing)
12V	250W	20.8 AMP (25 piece box packing)	24V	250W	10.4 AMP (25 piece box packing)
12V	300W	25 AMP (25 piece box packing)	24V	300W	12.5 AMP (25 piece box packing)
12V	400W	33.3 AMP (25 piece box packing)	24V	400W	16.7 AMP (25 piece box packing)

13MM ULTRA THIN SMPS

Model	Volt	DLP
SP-3.1	24VDC	1650
SP-4.16	24VDC	1500
SP-6.25	24VDC	1500

SENSORS

Conceal Sensor
Max.300W
Cutting Size:
55 x 55mm
DLP-

Surface Sensor
Max.300W
Cutting Size:
88 x 55mm
DLP-

Flat Surface Sensor
Max.1000W
Cutting Size:
86.4 x 60.4 x 98mm
DLP-

Wardrobe Sensor
Max..60W

DLP-

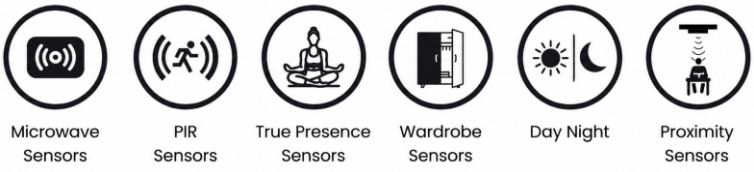

LED LIGHTING

A Class of it's own...

TEKNOLITE®

RDL -15

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt-DC	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RDL-15	1W	130	WB-BB	65	Ø17x22	Ø15	400
RDL-15	1W	130	ROSE GOLD BLACK	65	Ø17x22	Ø15	400

RDL -10

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt-DC	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RDL-10	1W	130	WB-BB	65	Ø17x22	Ø15	350

ZB

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZB-3-RD	3W	390	WB	25	Ø40X30	Ø28	300

DOB

ZD

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZD-3-RD	3W	390	WB	25	Ø40X30	Ø28	150

RCB

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RCB-3	3W	390	WB	25	Ø41X35	Ø32	550
RCB-5	5W	650	WB	25	Ø45X38	Ø32	620

JY

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
JY-3	3W	390	WB-BB	25	Ø41X35	400
JY-3	3W	390	COPPER	25	Ø15X60X60	430

NM-DOB

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

MODEL	WATT	LUMENS	Body Colour	Beam Angle	Dimension (mm)	CUTOUT	DLP
Mb-3	3W	390	WB	25	Ø86X75	Ø50	250
Mb-3 (RGB)	3W	390	WB	25	Ø86X75	Ø50	350

DOB

VIVA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	BEAM ANGLE	Dimension (mm)	Cutout	DLP
VIVA-7	7W	910	WB-NB	36	Ø85X72	Ø72	320
VIVA-10	10W	1300	WB-NB	36	–	–	530

HEAVY ALUMIINIUM BODY

Power By : **Bridgelux** | LED **Teknolite Driver**

BUILT TO LAST. DESIGNED TO SHINE.

DURABLE ALUMINIUM BODY

ENERGY EFFICIENT LED

JV SERIES

Power Options

4W	8W	12W	15W	20W	24W	30W	36W
520 LUMENS	1040 LUMENS	1560 LUMENS	1950 LUMENS	2600 LUMENS	3120 LUMENS	3900 LUMENS	4680 LUMENS

BODY COLOUR

WB-BB

JX SERIES

Power Options

4W	8W	12W	15W	20W	24W	30W	36W
520 LUMENS	1040 LUMENS	1560 LUMENS	1950 LUMENS	2600 LUMENS	3120 LUMENS	3900 LUMENS	4680 LUMENS

BODY COLOUR

WB-BB

HEAVY-DUTY ALUMINIUM BODY
Robust build for long-lasting performance.

RELIABLE PERFORMANCE
Stable, efficient and flicker-free lighting.

BRIGHT & EFFICIENT
High lumen output with low power consumption.

EASY INSTALLATION
Designed for quick and hassle-free setup.

BUILT STRONG. LIGHTS BRIGHT.

Heavy aluminium body

JV

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
JV-4	4W	520	WB-BB	24	Ø50X50	Ø42	580
JV-8	8W	1040	WB-BB	36	Ø80X70	Ø74	900
JV-12	12W	1560	WB-BB	36	Ø93X88	Ø82	1050
JV-15	15W	1950	WB-BB	36	Ø93X88	Ø82	1820
JV-20	20W	2600	WB-BB	36	Ø105X115	Ø100	2050
JV-24	24W	3120	WB-BB	36	Ø105X115	Ø100	2200
JV-30	30W	3900	WB-BB	36	Ø105X115	Ø100	2500
JV-36	36W	4680	WB-BB	36	Ø105X115	Ø100	2800

Heavy aluminium body

JX

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
Jx-4	4W	520	WB-BB	36	Ø50X50	Ø42	580
Jx-8	8W	1040	WB-BB	36	Ø80X70	Ø74	900
Jx-12	12W	1560	WB-BB	36	Ø93X88	Ø82	1050
Jx-15	15W	1950	WB-BB	36	Ø93X88	Ø82	1820
JX-20	20W	2600	WB-BB	36	Ø113X95	Ø100	2050
JX-24	24W	3120	WB-BB	36	Ø113X95	Ø100	2200
JX-30	30W	3900	WB-BB	36	Ø113X95	Ø100	2500
JX-36	36W	4680	WB-BB	36	Ø113X95	Ø100	2800

OLEE

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OLEE-8	8W	1040	WB	36	Ø70X55	Ø65	1380
OLEE-12	12W	1560	WB	36	Ø80X60	Ø81	1560
OLEE-15	15W	1950	WB	36	Ø80X60	Ø81	1740

VISCA

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
VISCA-8	8W	1040	WB	36	Ø72X80	Ø65	1761
VISCA-12	12W	1560	WB	36	Ø84X80	Ø75	2041
VISCA-15	15W	1950	WB	36	Ø84X80	Ø75	2236

TITAN

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TITAN-7	7W	910	WB	36	Ø 50X60	Ø45	1250
TITAN-12	12W	1560	WB	36	Ø 65X70	Ø55	1400
TITAN-18	18W	2340	WB	36	Ø 85X80	Ø75	2125

ARYA

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ARYA-8	8W	1040	WB-BB-NB	45	Ø68X66	Ø60	880
ARYA-12	12W	1560	WB-BB-NB	45	Ø83X75	Ø75	1135
ARYA-20	20W	2600	WB-BB-NB	45	Ø93X85	Ø85	2000
ARYA-24	24W	3120	WB-BB-NB	45	Ø93X85	Ø85	2394

JR

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
JR-4	4W	520	WB	25	Ø86X75	Ø50	320
JR-5	5W	650	WB	25	Ø102X80	Ø70	340
JR-10	10W	1300	WB	36	Ø145X120	Ø87	720

VLP

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
VLP-8	8W	1040	WB-NB-BB	45	Ø86X75	Ø50	800
VLP-12	12W	1560	WB-NB-BB	45	Ø102X80	Ø70	900

DV-(L)

LIGHT ALUMINUM

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER CCT 3in1 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
Dv-L7	7W	910	WB-BB	45°	Ø90x90	Ø55	620
Dv-L12	12W	1560	WB-BB	45-60°	Ø85x80	Ø75	700
Dv-L18	18W	2340	WB-BB	45-60°	Ø90x90	Ø80	890

Heavy Aluminium Die Casting

TK-MR16

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
MR-7	7W	910	WB-BB	45-60	Ø55X50	Ø50	1270
MR-12	12W	1560	WB-BB	45-60	Ø55X50	Ø50	1600
MR-18	18W	2340	WB-BB	45-60	Ø85X50	Ø50	2050

RC

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RC-12	12W	1560	WB	36	Ø82x68	Ø72	1360
RC-20	20W	2600	WB	36	Ø106x88	Ø96	2008
RC-30	30W	3900	WB	36	Ø114x100	Ø107	2592

TJ

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TJ - 12	12W	1560	WB-NB	36	Ø60x95x95	Ø80	1139
TJ - 24	24W	3120	WB-NB	36	Ø60x175x95	Ø80x160	2503
TJ - 36	36W	4680	WB-NB	36	Ø60x255x95	Ø80x240	3402
TJ - 12RL	12W	1560	WB NB	36	Ø55x100	Ø80	1284

FLIX

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLIX-08	08W	910	WB-BB	36	Ø65X46	Ø55	1150
FLIX-12	12W	1560	WB-BB	36	Ø75X48	Ø65	1550
FLIX-18	18W	2340	WB-BB	36	Ø85X52	Ø75	2000

FLIX TWIN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLIX-T-16	08X2W	1560	WB-BB	36-45	Ø122X65	Ø113X55	2400
FLIX-T-36	18X2W	2340	WB-BB	36-45	Ø162X85	Ø153X75	3200

VISION

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
VISION-08	08W	910	WB-BB	36	Ø43X35	Ø60	1250
VISION-12	12W	1560	WB-BB	36	Ø63X55	Ø75	1650

VISION TWIN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
VISION-T-16	08X2W	2080	WB-BB	36-45	Ø162X83	Ø155X75	2470

TRUM

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TRUM-12	12W	910	WB-BB	36	Ø83X65	Ø75	1250
TRUM-18	18W	1560	WB-BB	36	Ø105X75	Ø95	1650

TRUM TWIN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TRUM-T-24	12X2W	3120	WB-BB	36	Ø162X83	Ø150X70	2800
TRUM-T-36	18X2W	4680	WB-BB	36	Ø210X105	Ø195X90	3700

ES-127

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ES-127	20W	2600	WB-NB	36	Ø90X95	Ø75	2265
ES-127-30	30W	3900	WB-NB	36	Ø110X105	Ø95	2824
ES-127-36	36W	4680	WB-NB	36	Ø30X133	Ø115	3145
ES-127D	40W	5200	WB-NB	36	170X90X95	155x75	7062
ES-127D-60	60W	7800	WB-NB	36	210X110X105	192x95	8988

ZM

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZM-12	12W	1560	WB-BB	45	Ø109x95mm	Ø100	1555
ZM-20	20W	2600	WB-BB	45	Ø113x145mm	Ø136	2600
ZM-24	24W	3120	WB-BB	45	Ø130x130nmm	Ø136	2600
ZM-30	30W	3900	WB-BB	45	Ø113x145mm	Ø136	2800
ZM-36	36W	4680	WB-BB	45	Ø113x145mm	Ø136	3000
ZM-50	50W	6500	WB-BB	45	Ø113x145mm	Ø136	3000

ZM-TWIN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZM-T-30	15X2W	3900	WB-BB	45	Ø140x280mm	Ø260X132mm	5620
ZM-T-40	20X2W	5200	WB-BB	45	Ø140x280mm	Ø260X132mm	6460

Heavy Aluminium Die Casting

RF

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
RF - 5	5W	650	WB-BB	45	Ø68X39	Ø58	468
RF - 8	8W	1040	WB-BB	45	Ø88X43	Ø70	600
RF - 12	12W	1560	WB-BB	45	Ø105X55	Ø85	996
RF - 20	20W	2600	WB-BB	45-60	Ø75X120	Ø105	1412
RF - 24	24W	3120	WB-BB	45-60	Ø75X120	Ø105	1500
RF - 30	30W	3900	WB-BB	45-60	Ø90X145	Ø135	1608
RF - 36	36W	4680	WB-BB	45-60	Ø90X145	Ø135	1770
RF - 40	40W	5200	WB-BB	45-60	Ø160X160	Ø145	2100
RF - 50	50W	6500	WB-BB	45-60	Ø100X160	Ø145	2250

Heavy Aluminium Die Casting

PRISM

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
PR-20	20W	2600	WB-BB	45-60	Ø90X140	Ø120	1390
PR-24	24W	3120	WB-BB	45-60	Ø90X140	Ø120	1450
PR-30	30W	3900	WB-BB	45-60	Ø110X165	Ø145	1570
PR-36	36W	4680	WB-BB	45-60	Ø110X165	Ø145	1660
PR-40	40W	5200	WB-BB	45-60	Ø110X200	Ø175	2000
PR-50	50W	6500	WB-BB	45-60	Ø110X200	Ø175	2170

Premium Performance. Elegant Design.

A Class of it's own...
teknolite®
LED Lighting

EXCLUSIVE SPOTLIGHT SERIES

Powered By : **Bridgelux** LED **Teknolite Driver**

MV

Compact. Powerful. Reliable.

8W	12W	20W
1040 LUMENS	1560 LUMENS	2600 LUMENS

BODY COLOUR

- WB White Body
- BB Black Body

REFLECTOR COLOUR

- WR White Reflector
- NB Black Reflector
- RG Rose Gold Reflector

MV-SF

Sleek Surface Mount.
Superior Illumination.

8W	12W	20W
1040 LUMENS	1560 LUMENS	2600 LUMENS

BODY COLOUR

- WB White Body
- BB Black Body

REFLECTOR COLOUR

- WR White Reflector
- NB Black Reflector
- RG Rose Gold Reflector

2 YEARS WARRANTY | ENERGY EFFICIENT | HIGH PERFORMANCE | PREMIUM QUALITY | ECO FRIENDLY

MV

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
MV- 8	8W	1040	WB-BB	WR-NB-RG	36	Ø70X56	Ø60	599
MV-12	12W	1560	WB-BB	WR-NB-RG	36	Ø85X67	Ø75	749
MV-20	20W	2600	WB-BB	WR-NB-RG	36	Ø95X91	Ø84	1020

MV-SF

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
Mv-8-SF	8W	1040	WB-BB	WR-NB-RG	36	Ø70X56	Ø60	660
Mv-12-SF	12W	1560	WB-BB	WR-NB-RG	36	Ø85X67	Ø75	756
Mv-20-SF	20W	2600	WB-BB	WR-NB-RG	36	Ø95X91	Ø84	1272

JCB

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
JCB-8	8W	1040	WB-BB	WH-GLD-NB-RG	36-45	Ø75X75	Ø65	1004
JCB-12	12W	1560	WB-BB	WH-GLD-NB-RG	36-45	Ø83X83	Ø76	1120
JCB-20	20W	2600	WB-BB	WH-GLD-NB-RG	36-45	Ø95X95	Ø85	1908

TS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TS-7	7W	910	WB-BB	36	Ø40x57	Ø33	528
TS-7	7W	910	RG	36	Ø40x57	Ø33	528
TS-12	12W	1560	WB-BB	36	Ø59x76	Ø50	1150
TS-12	12W	1560	RG	36	Ø59x76	Ø50	1200
TS-20	20W	2600	WB-BB-RG	36	Ø75X95	Ø75	2100
TS-24	24W	3120	WB-BB-RG	36	Ø75X95	Ø75	2600

TEERA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TEERA-8	8W	1040	COPPER-NB	-	40	Ø82x60	Ø73	1188
TEERA-12	12W	1560	COPPER-NB	-	40	Ø82x60	Ø73	1350
TEERA 12-SF	12W	1560	COPPER	-	40	Ø82x60	Ø73	1350

ES

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ES-121	12W	1560	WB	36	Ø101H	Ø75X85	1380
ES-120	12W	1560	WB	36	Ø101H	Ø75X85	1380

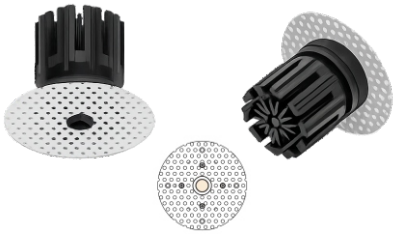

CRISP PINHOLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CRISP-12	12W	1560	WB-BB	9	Ø78X100	Ø78	2500

POLO PINHOLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
POLO-07	07W	910	WB-BB	24-36	Ø55X69	Ø55	1050
POLO-10	10W	1300	WB-BB	24-36	Ø62X74	Ø65	1150
POLO-12	12W	1560	WB-BB	24-36	Ø72X78	Ø75	1400
POLO-15	15W	1950	WB-BB	24-36	Ø72X78	Ø95	2075

ARENA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
AR-8	8W	1040	WB-BB	36	Ø55x65	Ø55	1231
AR-12	12W	1560	WB-BB	36	Ø75x63	Ø75	1490

AMET

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
AMET-8	8	1040	WB-BB	36	Ø45X65	Ø40	1400
AMET-12	12	1560	WB-BB	36	Ø50X75	Ø45	1900

IP54

VANS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
VANS -12	12W	1560	WB-BB	WR-NB	55	Ø83x65	Ø75	1426
VANS -20	20W	2600	WB-BB	WR-NB	55	Ø103x70	Ø95	1892
VANS -30	30W	3900	WB-BB	WR-NB	55	Ø132x75	Ø120-125	2721

BRIVE®
PREMIUM LED DOWNLIGHT

PREMIUM QUALITY

BRIVE COB

Deep Comfort. Bold Performance.

BRIVE COB Downlights deliver superior visual comfort and high efficiency with a sleek modern design. Engineered for performance. Built to last.

HIGH EFFICIENCY
Superior COB LED performance

VISUAL COMFORT
Deep reflector for glare control

DURABLE BUILD
Premium materials for long life

EASY INSTALLATION
Spring clips for secure fit

ASSEMBLY DIAGRAM

PROFESSIONAL DESIGN | HIGH QUALITY

HONEYCOMB MESH AVAILABLE



Reduces glare and enhances visual comfort.

REFLECTOR COLOR OPTIONS

ENERGY SAVING
Lower power consumption

LOW HEAT
Efficient heat dissipation for longer life

SAFE & RELIABLE
Constant current driver protection

ECO FRIENDLY
RoHS compliant materials

BRIVE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BRIVE-8	8W	1040	WB-BB-NB	45	Ø65X60	Ø55	815
BRIVE-12	12W	1560	WB-BB-NB	45	Ø85X64	Ø75	1300
BRIVE-20	20W	2600	WB-BB-NB	45	Ø105X72	Ø95	1940
BRIVE-24	24W	3120	WB-BB-NB	45	Ø130X73	Ø115	2600
BRIVE-30	30W	3900	WB-BB-NB	45	Ø170X85	Ø145	4200

TZF

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TZF-8	8W	1040	WB-NB	36	Ø60X60	Ø60	1602
TZF-12	12W	1560	WB-NB	36	Ø86X75	Ø75	1972
TZF-20	20W	2600	WB-NB	36	Ø100X90	Ø90	2671

RANZO

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RANZO-08	08W	1040	WB-RG	36-45	Ø43X35	Ø60	1720
RANZO-12	12W	1560	WB-RG	36-45	Ø63X55	Ø70	2600
RANZO-20	20W	2600	WB-RG	36-45	Ø63X55	Ø85	4160

RIO

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RIO-08	08W	1040	WB-RG	36-45	Ø43X35	Ø60	1800
RIO-12	12W	1560	WB-RG	36-45	Ø63X55	Ø70	2600
RIO-20	20W	2600	WB-RG	36-45	Ø63X55	Ø85	4150

LUCENTIS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LUCENTIS-07	07W	910	WB-BB	36-45	Ø76X40	Ø35	1720
LUCENTIS-12	12W	1560	WB-BB	36-45	Ø76X55	Ø50	2600
LUCENTIS-18	18W	2340	WB-BB	36-45	Ø85X70	Ø65	4160

BRONZE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BRONZE-09	09W	1170	WB-BB	36-45	Ø80X65	Ø55	1320
BRONZE-12	12W	1560	WB-BB	36-45	Ø80X95	Ø75	1620
BRONZE-15	15W	1950	WB-BB	36-45	Ø80X95	Ø75	1820

BRONZE TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

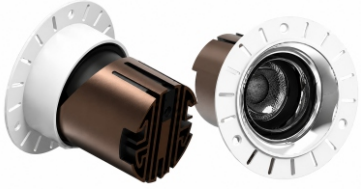

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BRONZE-TR-09	09W	1170	WB-BB	36-45	Ø80X65	Ø55	1620
BRONZE-TR-12	12W	1560	WB-BB	36-45	Ø80X95	Ø75	1820
BRONZE-TR-15	15W	1950	WB-BB	36-45	Ø80X95	Ø75	2120

A Class of it's own...

teknolite®

Smart Lighting

PREMIUM GALAXY SERIES

Matte -Black

Matte -White

Shinny Black

Chrome

Rose - gold

Bright White

Bright Black

GALAXY

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GALAXY-07	07W	910	WB-BB	36	Ø 70X65	Ø55	925
GALAXY-12	12W	1560	WB-BB	36	Ø 70X65	Ø55	1200
GALAXY-15	15W	1950	WB-BB	36	Ø 70X65	Ø55	1525
GALAXY-18	18W	2340	WB-BB	36	Ø 75X85	Ø75	1575
GALAXY-24	24W	3120	WB-BB	36	Ø95X105	Ø95	2200

GALAXY IP65

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GALAXY-12	12W	1560	WB-BB	36	Ø 70X65	Ø55	1300
GALAXY-18	18W	2340	WB-BB	36	Ø 75X85	Ø75	1500
GALAXY-24	24W	3120	WB-BB	36	Ø 95X105	Ø95	2350

MLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
MLE-8	8W	1040	WB-NB	36	Ø60X73	Ø50	1844
MLE -12	12W	1560	WB-NB	36	Ø86X104	Ø75	2150
MLE - 15	15W	1950	WB-NB	36	Ø86X104	Ø75	2600
MLE - 20	20W	2600	WB-NB	36	Ø105X119	Ø95	3250
MLE - 24	24W	3120	WB-NB	36	Ø105X119	Ø95	3750

TEEZA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
TEEZA - 8	8W	1040	WB-BB	WR-NB	38	Ø60X50	Ø45	1814
TEEZA -12	12W	1560	WB-BB	WR-NB	38	Ø70X60	Ø55	2300
TEEZA - 20	20W	2600	WB-BB	WR-NB	38	Ø80X70	Ø65	2857

TISCA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TISCA-9	09W	1170	WB-BB	36-45	Ø60X56	Ø55	1700
TISCA-12	12W	1560	WB-BB	36-45	Ø80X63	Ø75	1900

PREMIUM

Zeno

SERIES

teknolite®

Smart Lighting

PREMIUM FINISH

DURABLE BUILD

IP65 RATING

EASY INSTALLATION

ZENO

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Reflector Colours	Beam Angle	Dimension (mm)	Cutout	DLP
ZENO-7	07W	910	white-matte black-nickel black-chrome-Bronze-gold	36	Ø70X45	Ø40	1500
ZENO-12	12W	1560		36	Ø90X45	Ø40	1900
ZENO-18	18W	2340		36	Ø120X45	Ø40	2600

SHYNE COB

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Reflector Colours	Beam Angle	Dimension (mm)	Cutout	DLP
SHYNE-07	07W	910	white-matte black-nickel black-chrome-Bronze-gold	45-60	Ø84X80	Ø75	1050
SHYNE-12	12W	1560		45-60	Ø84X80	Ø95	1675
SHYNE-18	18W	2340		45-60	Ø84X80	Ø115	2650

RETRO

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RETRO-7	07W	910	WB-BB	36-45	Ø65X65	Ø55	775
RETRO-12	12W	1560	WB-BB	36-45	Ø75X85	Ø75	1150

ELUX DOWNLIGHT

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ELUX-12	12W	1560	WB-BB	36-45	Ø55X85	Ø75	1450
ELUX-18	18W	2340	WB-BB	36-45	Ø60X110	Ø95	1990

SPLASH IP65

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
SPLASH-12	12W	1560	WB-BB	36-45	Ø84X80	Ø75	1050
SPLASH-18	18W	2340	WB-BB	36-45	Ø84X80	Ø95	1675
SPLASH-24	24W	3120	WB-BB	36-45	Ø84X80	Ø115	2650

COMPACT COB

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
COMPACT12	12W	1560	WB-BB	36-45	Ø70X85	Ø75	1050

RL-H TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RL-H-12	12W	1560	WB-NB	36	Ø82x83	Ø82	1443
RL-H-15	15W	1950	WB-NB	36	Ø82x83	Ø82	2407

RL

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RL-12	12W	1560	WB-BB	36	Ø73x90	Ø73	1072
RL-20	20W	2600	WB-BB	36	Ø84x110	Ø84	1610

CB IP 54

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CB-8	8W	1040	WB-BB	36	Ø62x56	Ø55	1219
CB-12	12W	1560	WB-BB	36	Ø83x63	Ø75	1476

LEESO

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LEESO-7	7W	910	WB-BB	24	Ø 62X82	Ø55	999
LEESO-12	12W	1560	WB-BB	36	Ø 72X82	Ø65	1270
LEESO-18	18W	2340	WB-BB	36	Ø 82X82	Ø75	2000

PREMIUM URANUS COB

A Class of It's own...

teknolite® Smart Lighting

GLAMOUR MIRROR LIGHT

GLAMOUR MIRROR LIGHT

Elegant. Natural. Flawless.

ADVANCED COB TECHNOLOGY

Engineered with high-performance COB LED and optimized thermal design for longer life, higher efficiency and superior performance.

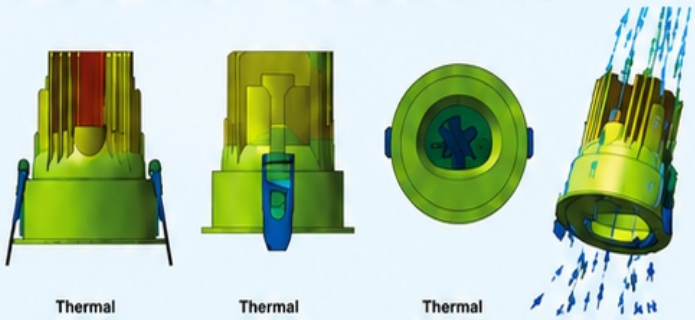

Thermal Conductivity | Thermal Conductivity | Thermal Conductivity | Thermal Air Convection

OPTICAL CONCEPT

Beauty mirror light: The color is accurate and transparent, and the makeup will not go wrong.

CRI:RA98
IES:Rf98,Rg102

Ordinary mirror headlight: The color is dim, and there are shadows on the side face and bottom.

CRI: RA80



Spectral curve

POLARIZED LENS

Polarized lenses can effectively filter out stray light, reduce glare, improve visual comfort, optimize light distribution, and make lighting more efficient and natural.

OPTICAL DESIGN FOR PERFECT LIGHTING

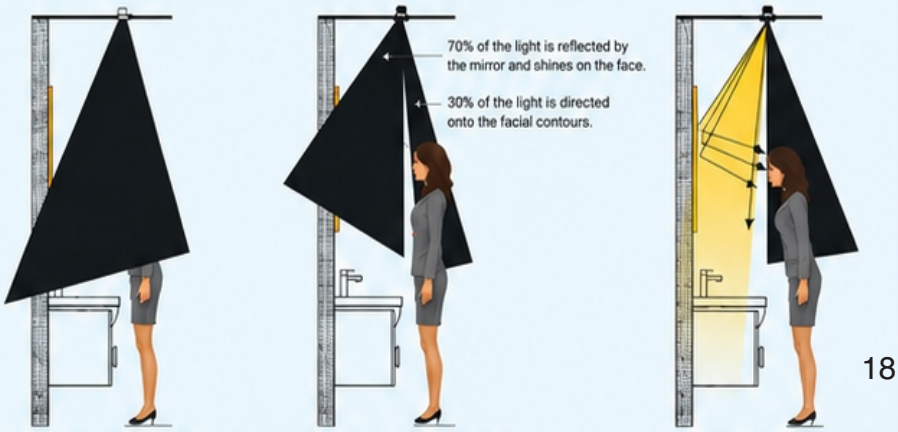

Ordinary mirror lights: direct light, no fill light, create double shadows on the face, the closer the person is to the mirror, the light will be blocked by the head, and the

Beauty mirror light: The light is reflected by the mirror, which effectively eliminates shadows on the face and makes the face softer.

Patented optical design. The closer you are to the mirror, the more light your face will receive.

SPECIFICATIONS

Model	Uranus COB
Power	7W / 12W
Input Voltage	AC 220-240V~ 50/60Hz
LED Type	COB
CCT	3000K / 4000K / 6000K
CRI	RA98
Beam Angle	110°
Lumen Output	7W: 700lm 12W: 1200lm
Cutout	Ø75mm
Dimensions	Ø85 x H50mm
Finish	White
Housing Material	Aluminum
IP Rating	IP44 (Front)
Application	Bathroom Mirror, Vanity, Makeup Room, Dressing Area

- High CRI RA98
- Flicker Free
- Eye Comfort
- Long Life 30,000 Hrs.
- IP44 Moisture Resistant

URANUS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
URANUS-12	12W	1560	WB-BB	36-45	Ø88X85	Ø75	5175

PLATINA-WALL WASHER

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PLATINA-12	12W	1560	WB-BB	36-45	Ø74X85	Ø75	1800
PLATINA-15	15W	1950	WB-BB	36-45	Ø74X85	Ø75	2500

TIMA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TIMA-07	07W	910	WB-BB	36-45	Ø55X69	Ø75	1536
TIMA-12	12W	1560	WB-BB	36-45	Ø62X74	Ø75	2000
TIMA-18	18W	2340	WB-BB	36-45	Ø72X78	Ø75	2445

OLIVE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OLIVE-07	07W	910	WB-BB	36-45	Ø86X43	Ø35	1440
OLIVE-12	12W	1560	WB-BB	36-45	Ø94X63	Ø55	2000
OLIVE-18	18W	2340	WB-BB	36-45	Ø110X81	Ø75	3040

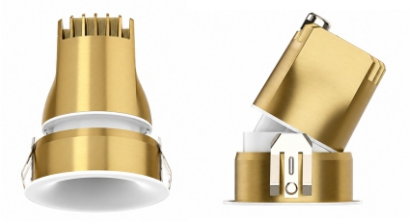

OLIVE MOVABLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OLIVE-M-12W	12W	1560	WB-BB	36-45	-	Ø 55	1540
OLIVE-M-15W	15W	1950	WB-BB	36-45	-	Ø 75	1690

ESTRO

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ESTRO-05	05W	650	WB-BB	36-45	Ø80X35	Ø30	1920
ESTRO-10	10W	1300	WB-BB	36-45	Ø96X45	Ø40	2560

PENCIL

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PC-5	5W	650	WB-NB	36	Ø35X90	Ø30	1793
PC-10	10W	1300	WB-NB	36	Ø44X100	Ø40	2334
PC-5 TILT	5W	650	WB-NB	36	Ø35X90	Ø30	1993
PC-10 TILT	10W	1300	WB-NB	36	Ø44X100	Ø40	2534

ANOX

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ANOX-07	07W	910	WB-BB	36-45	Ø110X45	Ø35	1550
ANOX-12	12W	1560	WB-BB	36-45	Ø115X55	Ø45	1900
ANOX-18	18W	2340	WB-BB	36-45	Ø118X65	Ø55	2700

ANOX-TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ANOX-TR-07	07W	910	WB-BB	36	Ø110X45	Ø35	1700
ANOX-TR-12	12W	1560	WB-BB	36	Ø115X55	Ø45	2150
ANOX-TR-18	18W	2340	WB-BB	36	Ø118X65	Ø55	2850

ASTERO

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTERO-07	07W	910	WB-BB	36-45	Ø110X45	Ø35	1625
ASTERO-12	12W	1560	WB-BB	36-45	Ø115X55	Ø45	2025
ASTERO-18	18W	2340	WB-BB	36-45	Ø115X65	Ø55	2750

ASTERO TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTERO-TR-07	07W	910	WB-BB	36-45	Ø110X45	Ø35	1900
ASTERO-TR-12	12W	1560	WB-BB	36-45	Ø115X55	Ø45	2300
ASTERO-TR-18	18W	2340	WB-BB	36-45	Ø115X65	Ø55	3050

ASTERO PINHOLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTERO-US-07	07W	910	WB-BB	36-45	Ø110X45	Ø35	1850
ASTERO-US-12	12W	1560	WB-BB	36-45	Ø115X55	Ø45	2300
ASTERO-US-18	18W	2340	WB-BB	36-45	Ø115X65	Ø55	2875

ASTERO ULTRA SLIM TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTERO-UST-07	07W	910	WB-BB	36-45	Ø110X45	Ø35	2125
ASTERO-UST-12	12W	1560	WB-BB	36-45	Ø115X55	Ø45	2600
ASTERO-UST-18	18W	2340	WB-BB	36-45	Ø115X65	Ø55	3175

OZONE

PREMIUM COB

Precision Light. Premium Performance.

PREMIUM COB LED
High efficiency with superior light output and color accuracy.

SUPERIOR HEAT DISSIPATION
Advanced aluminum heat sink ensures long life and stability.

EASY INSTALLATION
Tool-free installation with secure spring mechanism.

BUILT TO LAST
High quality materials for durability, reliability and long-term use.

VISUAL COMFORT
Low glare and flicker-free performance for a pleasant lighting experience.

TRIM OPTIONS

Round Trim (White)

Round Trim (Black)

Trimless (White)

Trimless (Black)

DIMENSIONS

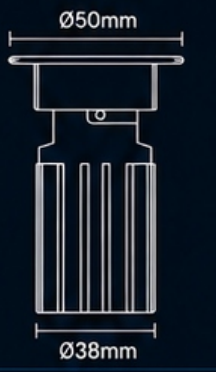

ARCHITECTURAL GRADE FINISH
Designed to blend elegance with performance.

ENERGY EFFICIENT
Maximum light output with minimal energy use.

PERFECT FOR EVERY SPACE
Ideal for galleries, retail, hospitality, and modern interiors.

PREMIUM QUALITY
Meticulously crafted to deliver a superior lighting experience.

SHAPE LIGHT. ELEVATE SPACES.

Precision • Performance • Perfection

OZONE FIX

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OZONE-F-10	10W	1300	WB-BB	36-45	Ø90X45	Ø40	1275
OZONE-F-15	15W	1950	WB-BB	36-45	Ø135X45	Ø40	1625
OZONE-F-20	20W	2600	WB-BB	36-45	Ø125X55	Ø50	1975

OZONE MOVABLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OZONE-M-10	10W	1300	WB-BB	36-45	Ø100X53	Ø45	1850
OZONE-M-15	15W	1950	WB-BB	36-45	Ø95X63	Ø55	2300
OZONE-M-20	20W	2600	WB-BB	36-45	Ø135X63	Ø55	2775
OZONE-M-25	25W	3250	WB-BB	36-45	Ø125X75	Ø65	3125
OZONE-M-30	30W	3900	WB-BB	36-45	Ø165X75	Ø65	3750

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

OZONE TRIMLESS

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OZONE-TR-10	10W	1300	WB-BB	36-45	Ø100X53	Ø45	1850
OZONE-TR-15	15W	1950	WB-BB	36-45	Ø95X63	Ø55	2300
OZONE-TR-20	20W	2600	WB-BB	36-45	Ø135X63	Ø55	2775
OZONE-TR-25	25W	3250	WB-BB	36-45	Ø125X75	Ø65	3125
OZONE-TR-30	30W	3900	WB-BB	36-45	Ø165X75	Ø65	3750

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

PLUTO ULTRA SLIM COB

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PLUTO-07	07W	910	WB-BB	36-45	Ø60X42	Ø35	1900
PLUTO-12	12W	1560	WB-BB	36-45	Ø101X42	Ø35	2300
PLUTO-18	18W	2340	WB-BB	36-45	Ø112X55	Ø45	3050

STELLAR PINHOLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
STE-07	07W	910	WB-BB	36-45	Ø55X69	Ø30	1275
STE-15	15W	1950	WB-BB	36-45	Ø62X74	Ø40	1725
STE-18	18W	2340	WB-BB	36-45	Ø62X74	Ø50	2075

A Class of it's own...

teknolite®

Smart Lighting

CLUB SERIES

A Class of it's own...

ASSEMBLY DIAGRAM

FESSIONAL DESIGN | HIGH QUALITY

AVAILABLE IN 8 REFLECTOR OPTIONS HONEYCOMB AVAILABLE

HONEYCOMB

ELLIPSES RING

PIN HOLE

MATT WHITE

CHROME

MATT BLACK

GUN BLACK

GOLD

FOG SILVER

CLUB SERIES

CLUB TALL

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-12	12W	1560	WB-BB	36-45	Ø113X65	Ø55	2050
CLUB-T-18	18W	2340	WB-BB	36-45	Ø148X85	Ø75	2450
CLUB-T-24	24W	3120	WB-BB	36-45	Ø148X85	Ø75	3050

CLUB TALL TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-TR-12	12W	1560	WB-BB	36-45	Ø113X65	Ø55	2150
CLUB-T-TR-18	18W	2340	WB-BB	36-45	Ø148X85	Ø75	2550
CLUB-T-TR-24	24W	3120	WB-BB	36-45	Ø148X85	Ø75	3150

CLUB TALL SQUARE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-SQ-12	12W	1560	WB-BB	36-45	Ø123X65	Ø55X58	2050
CLUB-T-SQ-18	18W	2340	WB-BB	36-45	Ø158X85	Ø75X78	2450
CLUB-T-SQ-24	24W	3120	WB-BB	36-45	Ø158X85	Ø75X78	3050

CLUB TALL SQ TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-SQ-TR-12	12W	1560	WB-BB	36-45	Ø123X65	Ø55X58	2150
CLUB-T-SQ-TR-18	18W	2340	WB-BB	36-45	Ø158X85	Ø75X78	2550
CLUB-T-SQ-TR-24	24W	3120	WB-BB	36-45	Ø158X85	Ø75X78	3150

CLUB TALL DOUBLE SQUARE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-DSQ-24	12X2W	3120	WB-BB	36-45	Ø123X115X65	Ø105X58	4100
CLUB-T-DSQ-36	18X2W	4680	WB-BB	36-45	Ø158X155X85	Ø145X78	4900

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

CLUB TALL DOUBLE SQ TRIMLESS

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-DSQ-TR-24	12X2W	3120	WB-BB	36-45	Ø123X115X65	Ø105X58	4300
CLUB-T-DSQ-TR-36	18X2W	4680	WB-BB	36-45	Ø158X155X85	Ø145X78	5100

GLANZA
PREMIUM SERIES

Illuminate Every Detail

A Class of it's own...

teknolite®

LED Lighting

REFLECTOR OPTIONS

PREMIUM QUALITY | HIGH LUMEN OUTPUT | MULTIPLE FINISHES | DURABLE & RELIABLE | ENERGY EFFICIENT

GLARE CONTROL ACCESSORIES

DOWNLIGHT OPTIONS

FOG SILVER | CHROME | GUN BLACK | MATT BLACK | GOLD | MATT WHITE

MATT BLACK | GUN BLACK | GOLD | CHROME | MATT WHITE | FOG SILVER

CURVE ROUND

CURVE SQUARE

SQUARE TRIMLESS OPTIONS

TRIMLESS DESIGN FOR SEAMLESS INTEGRATION

MATT BLACK | GOLD

DUAL MODULE OPTIONS

FLEXIBLE CONFIGURATIONS FOR EVERY SPACE

EASY INSTALLATION | EFFICIENT HEAT DISSIPATION | LONG LIFE PERFORMANCE | IDEAL FOR COMMERCIAL & RESIDENTIAL

Premium Lighting. Timeless Elegance.

GLANZA SERIES

GLANZA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-07	07W	1560	WB-BB	36-45	Ø78X65	Ø55	1275
GLZ-12	12W	1560	WB-BB	36-45	Ø96X85	Ø75	1400
GLZ-18	18W	2340	WB-BB	36-45	Ø108X85	Ø75	1850
GLZ-24	24W	3120	WB-BB	36-45	Ø110X105	Ø95	2775

GLANZA TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-TR-07	07W	1560	WB-BB	36-45	Ø78X65	Ø55	1425
GLZ-TR-12	12W	1560	WB-BB	36-45	Ø96X85	Ø75	1550
GLZ-TR-18	18W	2340	WB-BB	36-45	Ø108X85	Ø95	2150
GLZ-TR-24	24W	3120	WB-BB	36-45	Ø110X105	Ø95	2975

GLANZA SQUARE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-SQ-12	12W	1560	WB-BB	36-45	Ø106X85	Ø78X75	1500
GLZ-SQ-18	18W	2340	WB-BB	36-45	Ø118X85	Ø78X75	1950
GLZ-SQ-24	24W	3120	WB-BB	36-45	Ø124X105	Ø98X95	2875

GLANZA SQUARE TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-SQ-TR-12	12W	1560	WB-BB	36-45	Ø106X85	Ø78X75	1550
GLZ-SQ-TR-18	18W	2340	WB-BB	36-45	Ø118X85	Ø78X75	2150
GLZ-SQ-TR-24	24W	3120	WB-BB	36-45	Ø124X105	Ø98X95	2975

GLANZA DOUBLE SQUARE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-DSQ-12	12X2W	1560	WB-BB	36-45	Ø106X155X85	Ø145X78	3000
GLZ-DSQ-18	18X2W	2340	WB-BB	36-45	Ø118X155X85	Ø145X78	3850
GLZ-DSQ-24	24X2W	3120	WB-BB	36-45	Ø124X195X105	Ø185X98	5650

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

GLANZA DOUBLE SQUARE TRIMLESS

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-DSQ-TR-12	12X2W	3120	WB-BB	36-45	Ø106X155X85	Ø145X78	3200
GLZ-DSQ-TR-18	18X2W	4680	WB-BB	36-45	Ø118X155X85	Ø145X78	4050

CURVE ROUND

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-R-07	7W	910	WB-NB	36-45	Ø75X65	Ø55	1476
CLUB-CURVE-R-12	12W	1560	WB-NB	36-45	Ø81X85	Ø75	1861

CURVE ROUND TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-RT-07	7W	910	WB-NB	36-45	Ø 85X65	Ø55	2118
CLUB-CURVE-RT-12	12W	1560	WB-NB	36-45	Ø 91X85	Ø75	4005

CURVE SQUARE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-S-07	7W	910	WB-BB	36-45	Ø 85X65	Ø 55X58	2300
CLUB-CURVE-S-12	12W	1560	WB-BB	36-45	Ø 91X85	Ø 75X78	2600

CURVE SQUARE TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-DST-07	7W	910	WB-BB	36-45	Ø 85X65	Ø 55X58	2450
CLUB-CURVE-DST-12	12W	1560	WB-BB	36-45	Ø 91X85	Ø 75X78	2750

CURVE DOUBLE SQUARE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB CURVE-DS-14	7X2W	1820	WB-BB	36-45	Ø 85X115X65	Ø 105X58	5100

CURVE DOUBLE SQUARE TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-DST-14	7X2W	1820	WB-BB	36-45	Ø 85X115X65	Ø 105X58	5500

FLARE

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-12	12W	1560	WB-NB	24-36	53X66	Ø45	1750

FLARE TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-T-12	12W	1560	WB-NB	24-36	70X66	Ø42	1900

FLARE PINHOLE

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-P-12	12W	1560	WB-NB	24	53X66	Ø45	1850

FLARE TILTABLE

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-T-12	12W	1560	WB-NB	24-36	70X66	Ø42	1850

FLARE-TILTABLE TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-TR-12	12W	1560	WB-NB	24-36	80X66	Ø50	2125

FLARE-TILTABLE PINHOLE

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-TP-12	12W	1560	WB-NB	24	63X66	Ø55	1975

A Class of it's own...

teknolite®

LED Lighting

LASER RECESSED LINEAR PINHOLE

PRECISION LIGHTING. ELEVATED SPACES.

PRECISE LIGHT CONTROL | LOW GLARE COMFORT | EASY INSTALLATION | PREMIUM QUALITY

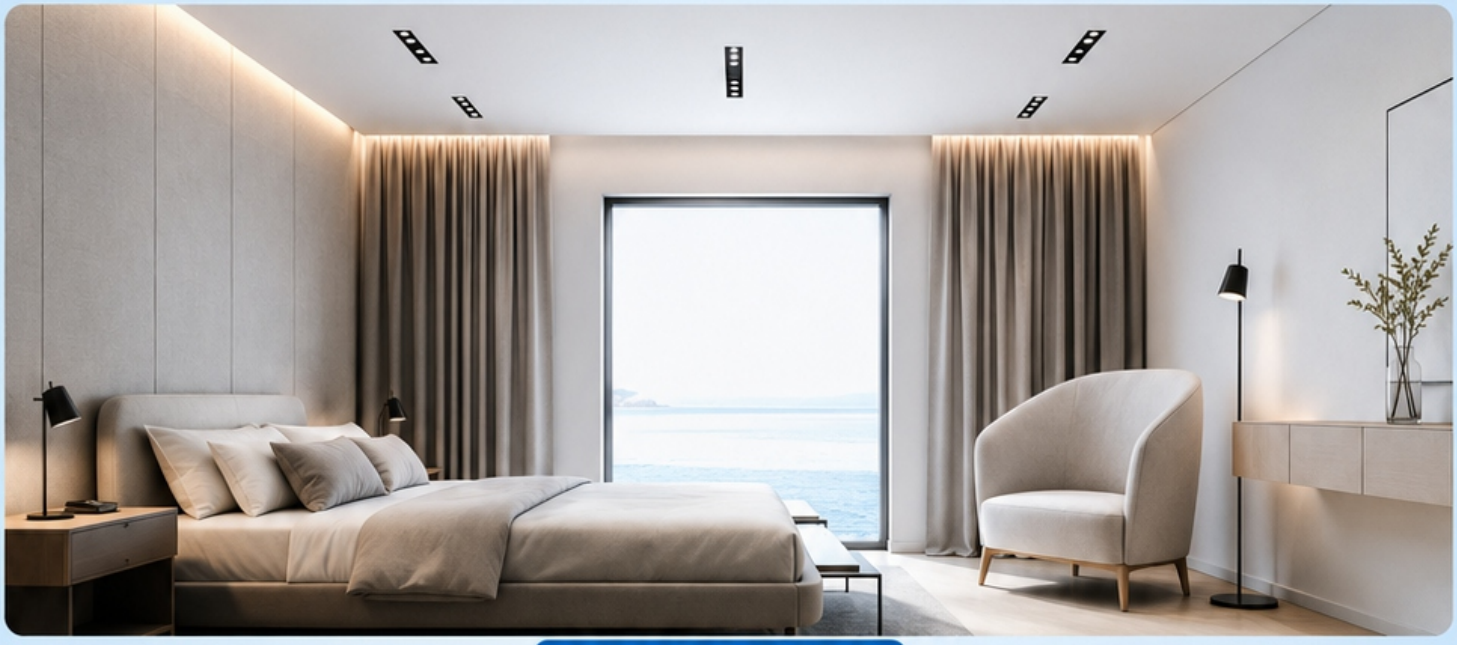

AVAILABLE MODELS

RZR-P-4

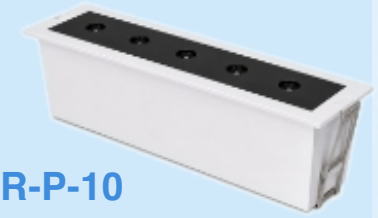

RZR-P-10

RZR-P-RD-6

RZR-P-12

RZR-P-14

RZR-P-24

Lamp can be customized in different colors

Strong electroplate spring

IDEAL FOR

OFFICE | HOME | SHOWROOM | STUDIO | INTERIORS

RZR-PINHOLE

Power By : Bridgelux | TEKNOLITE HPF DRIVER | 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RZR-P-4	04W	520	WB-BB	36-45	-	-	1150
RZR-P-10	10W	1300	WB-BB	36-45	-	-	1475
RZR-P-12	12W	1560	WB-BB	36-45	-	-	1950
RZR-P-14	14W	1820	WB-BB	36-45	-	-	1950
RZR-P-24	24W	3120	WB-BB	36-45	-	-	1950
RZR-P-RD-6	06W	780	WB-BB	36-45	-	-	1475

RZR TILTABLE

Power By : Bridgelux | TEKNOLITE HPF DRIVER | 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
RZR-6-TILT	6W	780	WB-BB	Black	36	84X49X44	78X43	1088
RZR-12-TILT	12W	1560	WB-BB	Black	36	144x49x44	136X43	1761
RZR-24-TILT	12Wx2	3120	WB-BB	Black	36	255X49X44	250X43	2980

LINEA-SLEEK

Power By : Bridgelux | TEKNOLITE HPF DRIVER | 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LINEA-06	06W	780	WB-BB	36-45	Ø122X15	Ø75	1350
LINEA-12	12W	1560	WB-BB	36-45	Ø236X15	Ø95	2750

RZR

Power By : Bridgelux | TEKNOLITE HPF DRIVER | 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RZR-3-6	6W	780	WB-BB	BB-WH-NB-RG	36	68x30x36	61x23	756
RZR-6-12	12W	1560	WB-BB	BB-WH-NB-RG	36	124x30x36	117x23	1134
RZR-9-18	18W	2340	WB-BB	BB-WH-NB-RG	36	-	-	1960

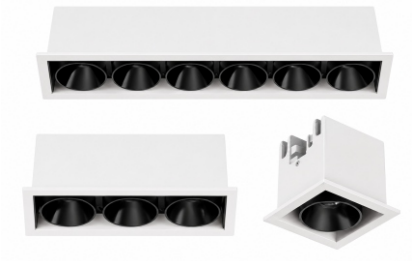

ELY

Power By : Bridgelux | TEKNOLITE HPF DRIVER | 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ELY-8	8W	1040	WB-BB	Black	24	40x50x30	40x50	1380
ELY- 24	24W	3120	WB-BB	Black	24	90x50x30	40x85	2350
ELY- 48	48W	6240	WB-BB	Black	24	50x138x30	40x124	4200

ASTRA

Power By : Bridgelux | TEKNOLITE HPF DRIVER | 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTRA-06	06W	780	WB-BB	36-45	Ø105X76	Ø46	3300
ASTRA-12	12W	1560	WB-BB	36-45	Ø165X76	Ø46	5600
ASTRA-18	18W	2340	WB-BB	36-45	Ø315X76	Ø46	9000

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

CUBIX-TRIMLESS

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CUBIX-T-06	06W	780	WB-BB	36-45	Ø122X15	Ø75	1650
CUBIX-T-12	12W	1560	WB-BB	36-45	Ø126X40	Ø31	3250
CUBIX-T-20	20W	2600	WB-BB	36-45			4250

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

DOUBLE & TRIPLE GIMBAL

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GBL2-20	2X20W	5200	WB-BB	45	Ø259x125x100	Ø238x125	4108
GBL2-30	2X30W	7800	WB-BB	45	Ø259x125x100	Ø238x125	4722
GBL3-60	3X20W	7800	WB-BB	45	Ø374X125X100	Ø353x125	5500
GBL-60	3X20W	7800	WB-BB	45	Ø374X125X100	Ø353x125	7832

ES

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ES - 7	7W	910	WB-BB	45	Ø65x65x52mm	Ø54x54	1090
ES - 14	7x2 W	1820	WB-BB	45	Ø65x126x52mm	Ø54x114	2000
ES - 21	7x3 W	2730	WB-BB	45	Ø65x186x52mm	Ø54x175	2950
ES - 28	7x4 W	3640	WB-BB	45	Ø126x126x52mm	Ø115x115	3750

STROKE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	CUTOUT	DLP
ES -6	6	780	WB-BB	45	Ø102X41	95X35	1375
ES-12	12	1560	WB-BB	45	Ø162X41	120X35	2000

HELIX-SF

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
HELIX-10	10	1300	WB-BB	45	Ø140X32X56	1575
HELIX-20	20	2600	WB-BB	45	Ø280X32X56	2400

LUME

A Class of it's own...

teknolite®

Smart Lighting

ANTI GLARE RECESSED MOUNTED LED LIGHT

SEE MORE • FEEL BETTER • LIVE BETTER

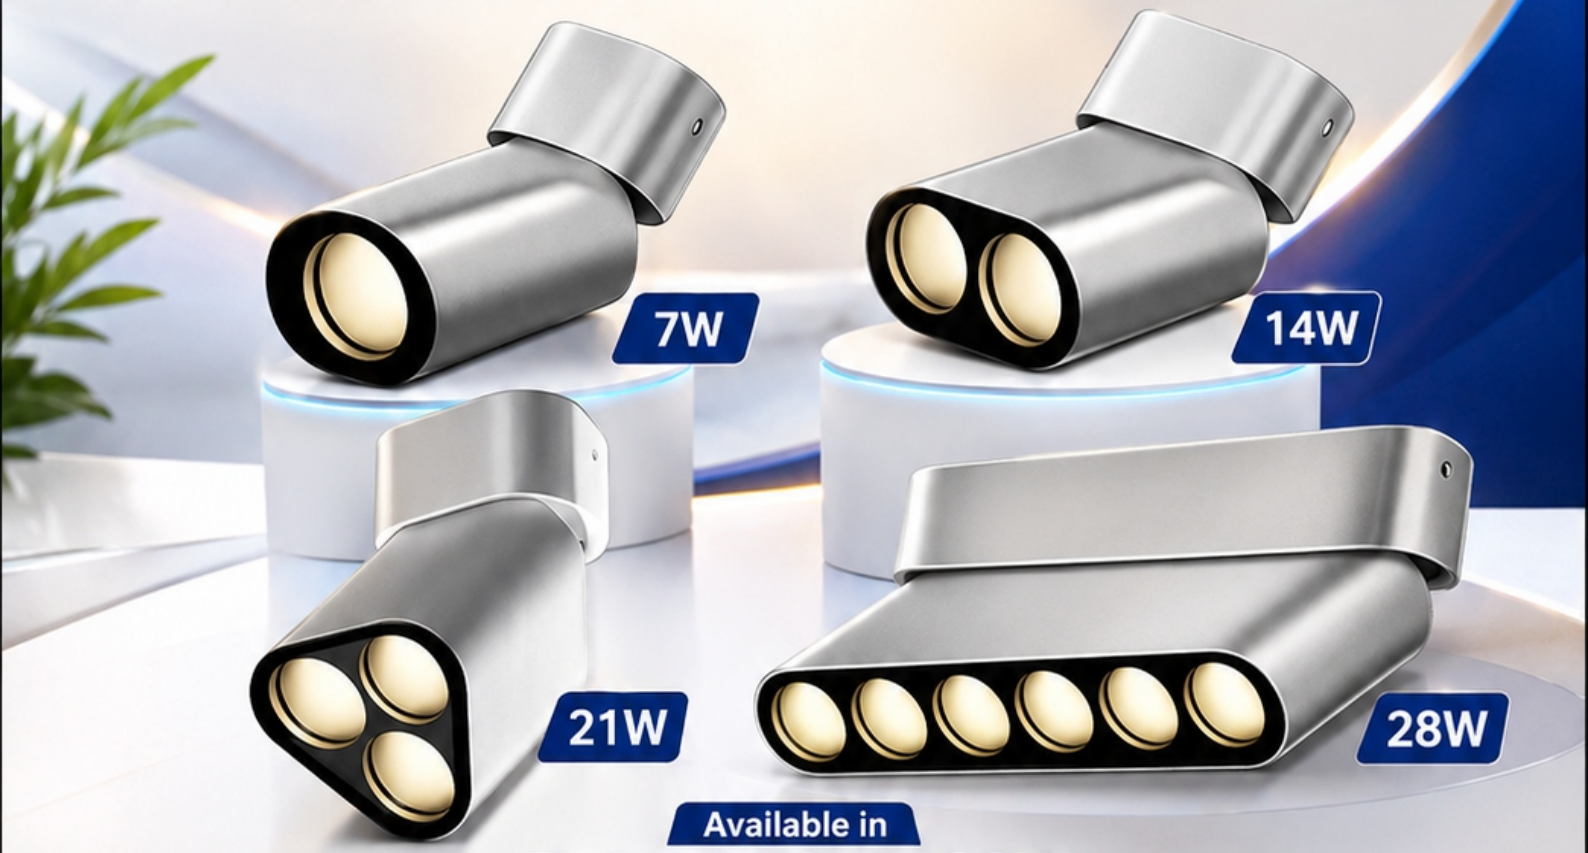

Available in

7W 14W 21W 28W

PRODUCT DIMENSIONS

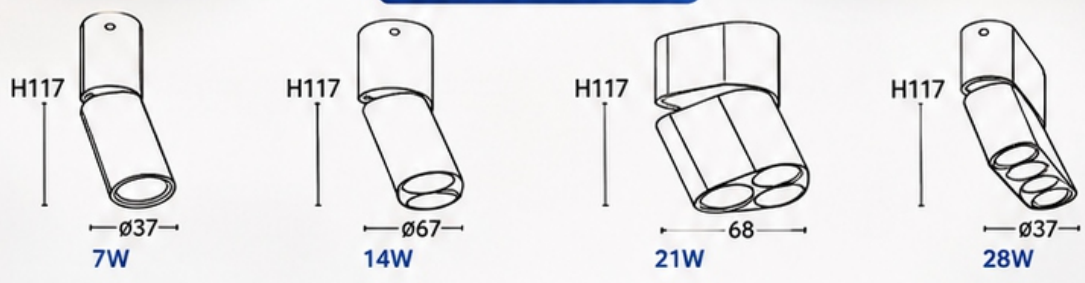

SOFT LIGHTING. STRONG PERFORMANCE. SMART CHOICE.

ANTI GLARE	RECESSED MOUNTED	ENERGY EFFICIENT	DURABLE & RELIABLE	SMART DESIGN	PERFECT FOR EVERY SPACE
Comfortable Lighting	Seamless & Stylish Look	Save More Energy	Built To Last	Modern | Minimal Functional	Home | Office Retail | Hospitality

High Performance LED | Elegant & Minimal Design | Easy Installation | Long Life | Low Maintenance

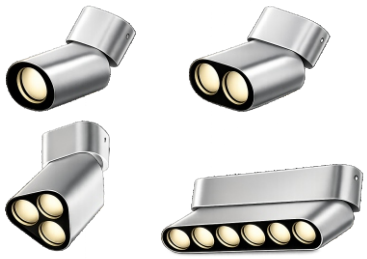

LUME

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
LUME-10	10W	1300	METAL GREY	36	Ø47X37X117	1650
LUME-15	15W	1950	METAL GREY	36	Ø67X37X117	2000
LUME-20	20W	2600	METAL GREY	36	Ø67X63X117	2950
LUME-36	36W	4680	METAL GREY	36	Ø187X37X117	3800

LAVIA

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LAVIA-9	9W	1170	METAL GREY	36	Ø102X62X85	Ø55	1850
LAVIA-15	15W	1950	METAL GREY	36	Ø102X82X85	Ø75	2400
LAVIA-9	9W	1170	METAL BLACK	36	Ø102X62X85	Ø55	1850
LAVIA-15	15W	1950	METAL BLACK	36	Ø102X82X85	Ø75	2400

BB

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BB-207	7Wx2	1640	WB-BB	WR-BK	38	Ø61X140X93	Ø52x125	2400
BB-212	12Wx2	2880	WB-BB	WR-BK	38	Ø195X125	Ø175	5200

BB-S

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BB-107	7W	840	WB-BB	WR-BK	38	Ø61X93	Ø 45	2300
BB-112	12W	1440	WB-BB	WR-BK	38	Ø83X104	Ø 55	2800

FN

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
FN-MOV	5W	650	WB	38	Ø40x90	1240

FN

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
FN-FIX	7W	910	BB	38	Ø40x70	1049

FN Frame

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Type	Body Colour	Dimension (mm)	Cutout	DLP
FN1-RD	Modular	WB-BB	Ø50	Ø40	241

FN Frame

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Type	Body Colour	Dimension (mm)	Cutout	DLP
FN1-SQ	Modular	WB-BB	40x50x30	40x50	381
FN2-SQ	Modular	WB-BB	90x50x30	40x85	540
FN3-SQ	Modular	WB-BB	50x138x30	40x124	794

PRECISION
DESIGN
POWERFUL
PERFORMANCE

PREMIUM

STELLA

SERIES

COB SPOTLIGHT

ILLUMINATE WITH ELEGANCE. PERFORM WITH EXCELLENCE.

The Stella Series COB Spotlight is engineered for spaces that demand superior lighting and refined aesthetics. With its advanced COB technology, precision optics, and sleek design, Stella delivers exceptional brightness, energy efficiency, and visual comfort.

- **HIGH LUMEN OUTPUT**
  Powerful COB LED for brilliant illumination
- **PRECISE BEAM CONTROL**
  Narrow to wide beam options
- **PREMIUM BUILD QUALITY**
  Durable body with high-grade finish
- **ADJUSTABLE DESIGN**
  Flexible tilt & rotation for perfect positioning
- **ENERGY EFFICIENT**
  Low power consumption with long life

VERSATILE CONFIGURATIONS

SINGLE SPOTLIGHT

DOUBLE SPOTLIGHT

MULTI SPOTLIGHTS

TECHNICAL SPECIFICATIONS

- LIGHT SOURCE: COB LED
- WATTAGE: 7W / 12W / 18W / 25W
- COLOR TEMPERATURE: 2700K / 3000K / 4000K / 6000K
- CRI: > 90
- BEAM ANGLE: 15° / 24° / 36° / 60°
- INPUT VOLTAGE: AC 100-240V 50/60Hz
- MATERIAL: Aluminium Die-Cast
- FINISH: White / Black
- LIFESPAN: 50,000 Hours

AVAILABLE COLORS

WHITE BLACK

- **COMMERCIAL SPACES**
  Shops, Offices, Showrooms
- **HOSPITALITY**
  Hotels, Restaurants, Lobbies
- **RESIDENTIAL**
  Living Rooms, Bedrooms, Kitchens
- **GALLERIES & MUSEUMS**
  Accentuate Art and Architectural Details

STELLA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX REF DOUBLE	12X2W	2400	WB-NB	36	Ø160x85x60	Ø150x75	4406

LANIX REF

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX REF	12W	1440	WB	NB	38	Ø85x57	Ø76	2138

LANIX FOCUS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX FOCUS	12W	1440	WB	NB	38	Ø85x70	Ø75	2138

LANIX SPOT

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX SPOT	12W	1440	WB	NB	38	Ø85x57	Ø75	2138

ORIX REF

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX REF	12W	1440	WB	NB	38	Ø65x105	Ø55	2138

ORIX FOCUS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX FOCUS	12W	1440	WB	NB	38	Ø65x116	Ø55	2138

ORIX SPOT

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX SPOT	12W	1440	WB	NB	38	Ø65x105	Ø55	2138

ORIX SPOT

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX SPOT	18W	1440	WB	NB	38	Ø105x73	Ø95	2138

TEKNOLITE®

LED LIGHTING

PREMIUM TRACK BEAMER

Precision lighting. Perfect focus.

- **15° to 60°** Stepless Zooming
- **High CRI** True Color Rendering
- **Energy Efficient** Low Power, High Output
- **Easy Installation** Compatible with Standard Tracks

CCT ADJUSTABLE

TRACK BEAMER-Z

Light adjustable

PRODUCT DIMENSIONS

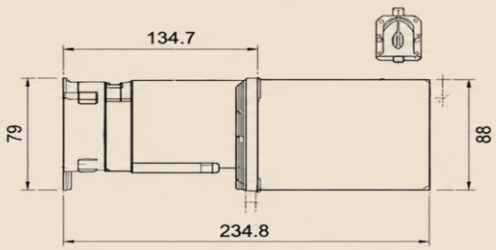

ADAPTER COMPATIBILITY





SPECIFICATIONS

- WATTAGE 30W
- DIMMING OPTIONS Standard / 0-10V DIM / Triac Dim / DALI dimmable
- ZOOM RANGE Wide beam angle 70°
- CCT ADJUSTABLE 2700K / 3000K / 4000K / 5000K / 5700K
- LIGHTING SPECIFICATIONS IP20, CRI>90/95
- LED TYPE CITIZEN / CREE / OSRAM LEDs
- WIRING CONFIGURATION 2wires / 3wires / 4wires / 6 wires
- COLOR TEMPERATURE 2700K / 3000K / 4000K / 5000K / 5700K / RGBW
- LIGHT EFFICIENCY 1500lm
- LED DRIVER TRIDONIC / PHILIPS / OSRAM drivers
- MOUNTING TYPE Adapter on track / Surface mounted
- INPUT VOLTAGE AC200-240V 50/60Hz
- LIFESPAN Ta40°C L70> 54000 hours

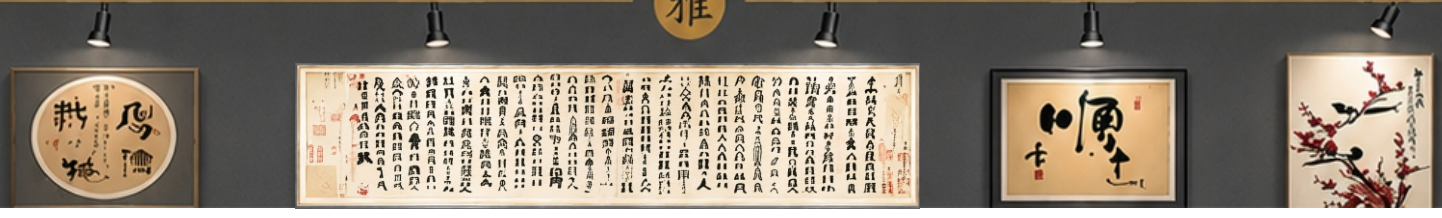

on order

TYRA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TYRA-12	12W	1560	WB-BB	48	75x100	960
TYRA-20	20W	2600	WB-BB	48	75x125	1284
TYRA-30	30W	3900	WB-BB	48	90x140	1530
TYRA-36	36W	4680	WB-BB	48	75x145	1890

TRKB

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TRKB-20	20W	2600	WB-BB	45-60	-	2332
TRKB-30	30W	3900	WB-BB	45-60	-	2950
TRKB-40	40W	5200	WB-BB	45-60	-	3500

TRKB-AR

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TRKB-AR20	20W	2600	WB-BB	45-60	-	2332
TRKB-AR30	30W	3900	WB-BB	45-60	-	2950
TRKB-AR40	40W	5200	WB-BB	45-60	-	3500

TRKB-CON

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TRKB-CON12	12W	1560	WB-BB	45-60	50x135	1900
TRKB-CON20	20W	2600	WB-BB	45-60	60x150	2650
TRKB-CON30	30W	3900	WB-BB	45-60	80X180	3250

TYRA-SF

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TYRA-12-S	12W	1560	WB-BB	48	75x100	1008
TYRA-20-SF	20W	2600	WB-BB	48	75x125	1284
WL0-7-SF	7W	910	WB-BB	48		756

A Class of it's own...

teknolite®

LED Lighting

A CLASS OF it's OWN...

+

Complete Solution for

SMART LED LIGHTING

LIGHT YOUR MOMENT

JEWELLERY LED RETAIL DISPLAY LIGHT WITH ADJUSTABLE SPOTLIGHT

- Discreet design for uninterrupted visual flow
- Ideal for glass cabinets, niche artefacts, and premium retail display
- Material: Aluminium

DLP-3700/- DLP-2650

ON ORDER

3W MOVING HEAD JEWELRY STANDING LIGHT

PERFECT LIGHTING TO ENHANCE EVERY JEWEL

- Adjustable Spotlight
- Focused Beam 10°–37°
- Brilliant Display for Precious Jewellery

PRODUCT SPECIFICATIONS

Item Name:	LED display light
Item No.:	3310 / 3320
LED Qty:	2 pc (3310) / 3 pc (3320)
Power:	3W
Color Temperature:	3000K 4000K 6000K
Beam Angle:	10°–37° (Adjustable)
Input Voltage:	AC100–240V 50–60HZ
LED Chips:	Cree LED
Installation:	Surface mounted
Lifespan:	30000–50000 Hours
Body Colors:	Silver, Black

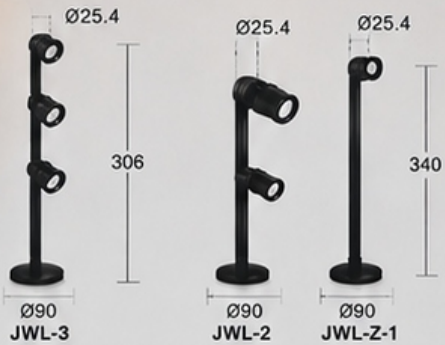

BODY COLOR OPTIONS

Black Silver White

LED COLOR TEMPERATURE

2700K 3000K

4000K 6000K

ADJUSTABLE BEAM LENS

10°–37°

(MIN 12 PIECE BOX PACKING)

2 WIRE HEAVY ALUMINUM TRACK CHANNEL (20 PCS BOX PACKING)

1

2 Wire Track Channel - 1mtr - WH/BK

₹590.00

2

2 Wire Track Channel - 2mtr - WH/BK

₹1200.00

3

2 Wire I Connector - White / Black

₹200.00

4

2 Wire L Connector - White / Black

260.00

5

2 Wire T Connector - White / Black

₹400.00

6

2 Wire X Connector - White / Black

545.00

7

2 Wire Power Head / Feeder - White / Black

₹210.00

8

2 Wire Adaptor - White / Black

₹390.00

9

2 Wire End Cap - White / Black

₹120.00

10

ROUND BAZE WHITE / BLACK for 6212D Kit

₹1080.00

11

Wire Jointer - White / Black

₹600.00

2 WIRE HEAVY ALUMINUM CONCEALED CHANNEL (20 PCS BOX PACKING)

1

2 Wire Concealed Track Channel - 1mtr - WH
2 Wire Concealed Track Channel - 1mtr - BK
2 Wire Concealed Track Channel - 2mtr - WH
2 Wire Concealed Track Channel - 2mtr - BK

1 mtr - 1400.00
2 mtr - 2300.00

2

2 Wire Concealed I Connector - White / Black

400.00

3

2 Wire Concealed L Connector - White / Black

630.00

4



2 Wire Concealed T Connector - White / Black

960.00

5



2 Wire Concealed X Connector - White / Black

1000.00

6

2 Wire Concealed Power Head / Feeder - White / Black

290.00

7

2 Wire End Cap Connector - White / Black

140.00

A Class of it's own...

teknolite®

LED Lighting

PRIME PRODUCT TELESCOPE

ADJUSTABLE BEAM ANGLE 10°-55°

Zoomable Adjustable Beam-Angle **10°-55°** Surface Cylindrical Ceiling Focus Accent Spot Down Light

Specialized LED fixtures designed for adjustable accent, task, and display lighting. Allow users to focus light tightly (10°) for highlighting artwork or widen it (55°) for the general wash lighting by rotating the lens with flicker-Free

FOCUS PRECISELY
From narrow spot to wide flood

ZOOM & ADJUST
Smooth rotation for perfect control

HIGH VISUAL COMFORT
Flicker-Free for eye-friendly lighting

ENERGY EFFICIENT
Save more, shine more

ADJUSTABLE BEAM ANGLE 10°-55°

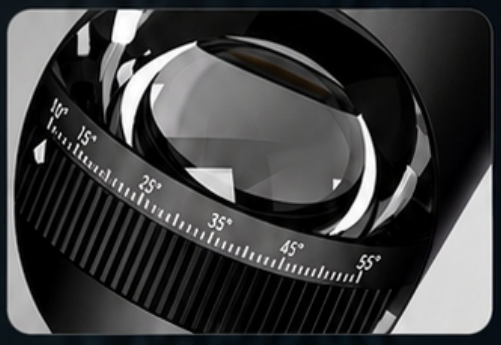

Rotate the lens to easily adjust the beam angle from 10° to 55°.

ZOOMABLE FOCUS CONTROL

Smooth zoom function for precise lighting control and flexibility

DIFFERENT BEAM EFFECTS

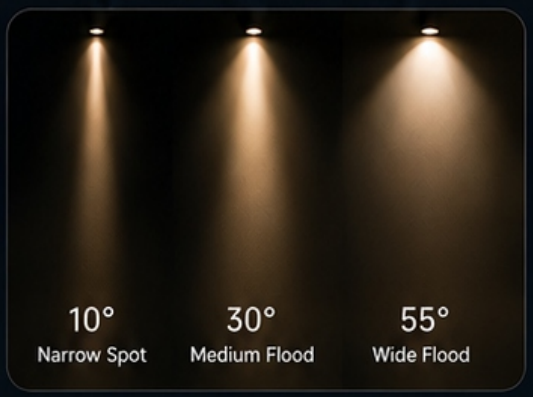

SPECIFICATIONS

Power
15W | 20W | 25W | 30W

Size
Ø55*900mm | Ø65*100mm
Ø75*115mm | Ø85*130mm

Reflector Color
White | Black

Trim Finishes
White | Black

IDEAL FOR

- Art Galleries & Museums
- Retail & Showrooms
- Hotels & Hospitality
- Residential Accent Lighting
- Exhibitions & Displays

on order

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

CANVA SURFACE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
CANVA-12	12W	1560	WB-BB	36-45	Ø65X75	1080

ON ORDER Ip54
ADDITIONAL CHARGE

SFC

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
SFC-605	5W	650	WB-BB	WR-NB-RG	36	Ø50X50	678
SFC-606	7W	910	WB-BB	WR-NB-RG	36	Ø62X72	756
SFC-607	12W	1560	WB-BB	WR-NB-RG	36	Ø77X90	1080
SFC-616	12W	1560	WB-BB	WR-NB-RG	36	Ø77X90	1116
SFC-617	20W	2600	WB-BB	WR-NB-RG	36	Ø88X110	1380
SFC-624	24W	3120	WB-BB	NB-RG	36	Ø88X110	1578

PDL

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
PDL-605	5W	650	WB-BB	WR-NB-RG	36	Ø34X58	932
PDL-606	7W	910	WB-BB	WR-NB-RG	36	Ø55X100	1014
PDL-607	12W	1560	WB-BB	WR-NB-RG	36	Ø55X150	1353
PDL-616	12W	1560	WB-BB	WR-NB-RG	36	Ø75X100	1392
PDL-617	20W	2600	WB-BB	WR-NB-RG	36	Ø75X125	1669
PDL-624	24W	3120	WB-BB	NB-RG	36	Ø95X130	1878

SFR

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
SFR-7012	12W	1560	WB-BB	48	Ø72X85	1452
SFR-7020	20W	2600	WB-BB	48	Ø92X100	2204
SFR-7030	30W	2900	WB-BB	48	Ø122X115	2620
SFR-50	50W	6500	WB-BB	48	Ø142X145	3036

SJ

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
SJ-8	8W	1040	WB-BB	WR-NB-RG	36	53X53X72	948
SJ-12	12W	1560	WB-BB	WR-NB-RG	36	75X75X95	1128
SJ-24	24W	3120	WB-BB	WR-NB-RG	36	75X50X95	1704

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

NEXUS PREMIUM SURFACE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
CANVA-12	12W	1560	WB-BB	36-45	Ø76X55	1700
CANVA-18	18W	2340	WB-BB	36-45	Ø82X75	2075

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

LUNA PREMIUM SURFACE IP65

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
LUNA-07	07W	910	WB-BB	36-45	Ø75X54	2250
LUNA-12	12W	1560	WB-BB	36-45	Ø85X75	3300
LUNA-18	18W	2340	WB-BB	36-45	Ø95X95	4750
LUNA-24	24W	3120	WB-BB	36-45	Ø110X120	6750
LUNA-30	30W	3900	WB-BB	36-45	Ø130X150	9600

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

NEXUS SURFACE PINHOLE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
NEX-08	08W	910	WB-BB	24	Ø67X53	1650
NEX-12	12W	1520	WB-BB	24	Ø80X73	2050
NEX-20	20W	2600	WB-BB	24	Ø85X95	3150

BT8 (Honeycomb)

BTSFC

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
BT-12-SFC	12W	1560	WB-BB	HONEYCOMB+BK & RG	38	Ø76X85	2291
BT-15-SFC	15W	1950	WB-BB	WH-BK	38	Ø100X105	2442

BTZ

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
BTZ-8	8W	1040	WB-BB	WH-NB-RG	36	Ø63X78	980
BTZ-12	12W	1560	WB-BB	WH-NB-RG	36	Ø78X95	1200
BTZ-15	15W	1950	WB-BB	WH-NB-RG	36	Ø88X105	1320

teknolite®
LED Lighting

MOON
PREMIUM SURFACE DOWNLIGHT

NEW DESIGN

Minimalist elegance.
Maximum impact.

Crafted with precision and designed for modern interiors, our Moon Premium Surface Downlight delivers refined illumination with a sleek architectural presence.

COLOR OPTIONS

CRI	UGR			
>90	<19	36°	AC 220-240V	IP20

SPECIFICATIONS

Type	Surface Downlight
Material	Aluminium
Light Source	High Performance LED
Power	6W / 12W / 18W / 24W
Color Temperature	2700K / 3000K / 4000K / 6000K
CRI	>90
Beam Angle	36°
Input Voltage	AC 220-240V
IP Rating	IP20
Finish Options	8 Premium Combinations
Lifespan	50,000 Hours

DIMENSIONS

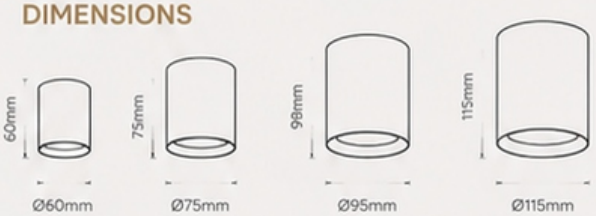

MODERN DESIGN
Seamless integration with any interior

SOFT & FOCUSED LIGHT
Comfortable ambiance with reduced glare

DURABLE BUILD
High-quality aluminium for long-lasting use

IDEAL FOR
Homes, Hotels, Offices, Retail & Hospitality

MOON

Power By : **Bridgelux** LED **Teknolite Driver** 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
MOON-12	12W	1560	WB-BB	60	Ø92X65X75	1450
MOON-18	18W	2340	WB-BB	60	Ø122X65X75	2050
MOON-24	24W	3120	WB-BB	60	Ø142X65X75	2900

RDD PRO

Power By : **Bridgelux** LED **Teknolite Driver** 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RDD-PRO-12	12W	1560	WB-BB/BB-WB	120	Ø100X50	Ø92	1000
RDD-PRO-18	18W	2340	BB-SB/WB-SB	120	Ø130X50	Ø120	1350
RDD-PRO-24	24W	3120	WB-RG/BB-RG	120	Ø150X50	Ø140	1840
RDD-PRO-CC-12	12W	1560	WB-BB/BB-WB	120	Ø100X50	Ø92	1300
RDD-PRO-CC-18	18W	2340	BB-SB/WB-SB	120	Ø130X50	Ø120	1950
RDD-PRO-CC-24	24W	3120	WB-RG/BB-RG	120	Ø150X50	Ø140	2640

CRYSTO DOWNLIGHT

Power By : **Bridgelux** LED **Teknolite Driver** 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CRYSTO-12	12W	910	WB-BB	36-45	Ø85X50	Ø75	1100
CRYSTO-12-CC	12W	1560	WB-BB	36-45	Ø85X50	Ø75	1500
CRYSTO-18	18W	2340	WB-BB	36-45	Ø115X105	Ø105	1600
CRYSTO-18-CC	18W	2340	WB-BB	36-45	Ø115X105	Ø105	2050
CRYSTO-24	24W	1560	WB-BB	36-45	Ø165X155	Ø155	2200
CRYSTO-24-CC	24W	2340	WB-BB	36-45	Ø165X155	Ø155	2750

RLD

Power By : **Bridgelux** LED **Teknolite Driver** 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RLD-12-RD	12W	1560	WB-BB	100	Ø120X50	Ø108	780
RLD-18-RD	18W	2340	WB-BB	100	Ø155X55	Ø137	1002
RLD-18-CC	18W	2340	WB-BB	100	Ø155X55	Ø137	1596
RLD-24-RD	24W	3120	WB-BB	100	Ø175X55	Ø165	1380
TNRLD-20-RD	20W	2600	WB BB	100	Ø155X55	Ø165	2484

RLD

Power By : **Bridgelux** LED **Teknolite Driver** 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RLD-18-SQ	18W	2160	WB-BB	100	Ø145X57	Ø137	1002
RLD-18-SQCC	18W	2160	WB-BB	100	Ø145X57	Ø137	1596
RLD-24-SQ	24W	2880	WB-BB	100	170x170x65	158x158	1380
(TUNABLE) TNRLD-20-SQ/RD	20W	2880	WB-BB	100	170x170x65	158x158	2484

JDD

Power By : **Bridgelux** LED **Teknolite Driver** 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
JDD-12	12W	1560	WB	100	Ø87x50	Ø72	690
JDD-15	15W	1950	WB	100	Ø105x50	Ø90	876
JDD-22	22W	2860	WB	100	Ø125x60	Ø105	1062

DDR FLAT DOWNLIGHT

Power By : EDISON LED **LED Colour :** 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
DDR-RD-16	16	2080	WB	120	Ø 86X120	Ø105	450
DDR-RD-24	24	3120	WB	120	Ø 134X170	Ø155	540
DDR-RD-32	32	4160	WB	120	Ø 186X225	Ø 205	700
DDR-SQ-16	16	2080	WB	120	Ø 86X120	Ø 105	800
DDR-SQ-24	24	3120	WB	120	Ø 134X170	Ø 155	1200
DDR-SQ-32	32	4160	WB	120	Ø 186X225	Ø 205	1350

LB ALUMINUM HEAVY BODY

Power By : EDISON LED **LED Colour :** 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LB 12	12W	1560	WB-BB	120	Ø125X125X23	Ø115	828
LB 15	15W	1950	WB-BB	120	Ø142X142X23	Ø133	906
TN LB 15	15W	1950	BB	120	Ø142X142X23	Ø133	1872
LB 15 SF	15W	1950	WB-BB	120	Ø135X135X30	Ø133	1200
LB 24	24W	3120	WB-BB	120	Ø200X200X23	Ø187	1620

LZP ALUMINUIM HEAVY BODY

Power By : EDISON LED **LED Colour :** 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LZP-15-SQ	15W	1950	WB	120	168X168X22	143X143	828
LZP-18-SQ	18W	2340	WB	120	180X180X25	160X160	1110
LZP-22-SQ	22W	2860	WB	120	220X220X22	195X195	1272
TN-LZP-15-SQ	15W	1950	TUNABLE	120	168X168X22	143X143	1758
TN-LZP-15-RD	15W	1950	TUNABLE	120	180X180X2	143X143	1758

LZP-AS-SURFACE ALUMINUM

Power By : EDISON LED **LED Colour :** 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout (mm)	DLP
LZP-6-SFRD/SQ	6W	600	WB	120	Ø108X22	Ø101	510
LZP-8-SFRD/SQ	8W	800	WB	120	Ø150X22	Ø101	510
LZP-12-SFRD/SQ	12W	1200	WB	120	Ø180X22	Ø127	576
LZP-15-SFRD/SQ	15W	1500	WB	120	Ø180X22	Ø152	600
LZP-18-SFRD/SQ	18W	1800	WB	120	Ø240X22	Ø178	690
LZP-22-SFRD/SQ	22W	2200	WB	120	Ø240X22	Ø203	936

LZP-AS-CC

Power By : EDISON LED **LED Colour :** 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LZP-8-RD/SQCC	8W	800	WB	120	Ø150X22	Ø101	552
LZP-1-5RD/SQCC	15W	1500	WB	120	Ø180X22	Ø152	630
LZP-22-RD/SQCC	22W	2200	WB	120	Ø240X22	Ø203	1068
LZP-8-RD/SQCCSF	8W	800	WB	120	Ø150X22	Ø101	612
LZP-15-RD/SQCCSF	15W	1500	WB	120	Ø180X22	Ø152	720
LZP-22-RD/SQCCSF	22W	2200	WB	120	Ø240X22	Ø203	1116

PZP (POLY CARBONATE MATERIAL)

Power By : **EDISON** **LED Colour :** 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PZP-8-RD/SQ	8W	800	WB	120	Ø150X22	Ø101	336
PZP-12-RD/SQ	12W	1200	WB	120	Ø180X22	Ø127	354
PZP-15-RØ SQ	15W	1500	WB	120	Ø180X22	Ø152	420
PZP-18-RD/SQ	18W	1800	WB	120	Ø240X22	Ø178	636
PZP-22-RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	840
PZP-15-RD/SQSF	15W	1500	WB	120	Ø180X22	Ø152	528
PZP-22-RD/SQSF	22W	2200	WB	120	Ø240X225	Ø203	600

15MM BORDER

LZP-AS (ALUMINUIM)

Power By : **EDISON** **LED Colour :** 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LZP-6-RD/SQ	6W	600	WB	120	Ø108X22	Ø101	384
LZP-8-RD/SQ	8W	800	WB	120	Ø150X22	Ø101	420
LZP-12-RD/SQ	12W	1200	WB	120	Ø180X22	Ø127	438
LZP-15-RD/SQ	15W	1500	WB	120	Ø180X22	Ø152	576
LZP-18-RD/SQ	18W	1800	WB	120	Ø240X22	Ø178	612
LZP-22-RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	828

PZP-SF (POLY CARBONATE MATERIAL)

Power By : **EDISON**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PZP-8-RD/SQCC	8W	800	WB	120	Ø150X22	Ø101	408
PZP-15-RD/SQCC	15W	1500	WB	120	Ø180X22	Ø152	540
PZP-22-RD/SQCC	22W	2200	WB	120	Ø240X22	Ø203	960
PZP-8-RD/SQCCSF	8W	800	WB	120	Ø150X22	Ø101	480
PZP-15-RD/SQCCSF	15W	1500	WB	120	Ø180X22	Ø152	648
PZP-22-RD/SQCCSF	22W	2200	WB	120	Ø240X22	Ø203	1080

LZR (ALUMINIUM)

Power By : **EDISON**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
LZR-12-RD/SQ	12W	1440	WB-BB	120	Ø100	723
LZR-18-RD/SQ	18W	2160	WB-BB	120	Ø150	1155
LZR-22-SQ	22W	2640	WB-BB	120	Ø195	1598
LZR-36-RD/SQ	36W	4320	WB	120	Ø220	1917

PZR (PLASTIC)

Power By : **EDISON**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
PZR-8	8W	600	WB-BB	120	Ø100	348
PZR-15	15W	1200	WB-BB	120	Ø150	540
PZR-22	22W	1800	WB-BB	120	Ø195	702

LB 2X2 ALUMINIUM

Power By : **EDISON** **LED Colour :** 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
LB-36	36W	4320	WB	120	Ø609X600	3300
LB-48	48W	5760	WB	120	Ø609X600	3480

LB BACKLIGHT PLASTIC

Power By : **EDISON** LED **LED Colour :** 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
LB-36	36W	4320	WB	120	Ø609X600	2376

ON ORDER 4PCS BOX PACKING

LB SURFACE BACKLIGHT

Power By : **EDISON** LED **LED Colour :** 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
LB-36	36W	4320	WB	120	Ø609X600	2700

ON ORDER 4PCS BOX PACKING

PZP SENSOR CONCEAL

100-50 & 100-0

Power By : **EDISON** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PZPSN-15-SQ/RD	15W	1500	WB	120	Ø180X22	Ø152	1503
PZPSN-22-RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	2196
PZPSNSF-15-SQ/RD	15W	1500	WB	120	Ø180X22	Ø152	1503
PZPSNSF-22-RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	2197

ON ORDER 20PCS BOX PACKING

TPF

Power By : **CREE** LED

LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TPF-507018	18W	1800	WB-BB	120	2 Ft x 50mm x 72mm	1630
TPF-507040	40W	4000	WB-BB	120	4 Ft x 50mm x 72mm	2900
TPF-507080	80W	14400	WB-BB	120	8 Ft x 50mm x 72mm	4590
TPF-507072	72W	7200	WB-BB	120	4 Ft x 50mm x 72mm	1755
TPF-507040	40W	4000	WB-BB/ 3 in 1	120	4 Ft x 50mm x 72mm	3115
TN-TPF-507040	40W	7200	WB-BB/ TN Remote+BT	120	4 Ft x 50mm x 72mm	4570

HANGING WIRE (PAIR)

8 PC BOX PACKING

Model	Body Colour	Dimension	DLP
HG	STEEL	2 meter	250

20 PC BOX PACKING
MINIMUM ORDER 100 PC

PSF DOB

Power By : **EDISON** LED **LED Colour :** 3000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
PSF-8	8W	800	WB	120	1FT	302
PSF-12	12W	1200	WB	120	2FT	416
PSF-18	18W	1800	WB	120	3FT	610

BTT 3IN1

Power By : **EDISON** LED **LED Colour :** 3000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
BTT-36	36W	4680	WHITE	180	31X612X8	1250
BTT-72	72W	9360	WHITE	180	31X1224X8	1575

A Class of it's own...
teknolite®
LED Lighting
MAGNETIC TRACK LIGHTING
5mm, 11mm & 25mm

5mm Magnetic Track lights

PROFILE LIGHT TILTABLE

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
12W	L230*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2000
18W	3385*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2880
30W	L555*W26*H24mm	DC48V	≥90	300K, 400K, 600K	3560

LINEA LIGHT TILTABLE

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L122*W26*H24mm	DC48V	≥90	300K, 400K, 600K	1560
12W	L230*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2160
18W	L338*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2800
24W	L445*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2800

5mm Magnetic Track lights

FODING PROFILE SMD LINEAR

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
12W	L230*W26*H80mm	DC48V	≥90	300K, 400K, 600K	3240

FOLDING LINEA LIGHT

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L122*W26*H80mm	DC48V	≥90	300K, 400K, 600K	2000
12W	L230*W26*H80mm	DC48V	≥90	300K, 400K, 600K	3280

A Class of it's own...
teknolite®
LED Lighting

5mm Magnetic Track lights

TRACK LIGHT

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	42*100mm	DC48V	≥90	300K, 400K, 600K	1860
10W	48*105mm	DC48V	≥90	300K, 400K, 600K	2800
20W	58*130mm	DC48V	≥90	300K, 400K, 600K	3640

DUAL TRACK LIGHT

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
6W+6W	45*100mm*2	DC48V	≥90	300K 400K 600K	4400

5mm Magnetic Track lights

TERNARY LIGHT

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L122xW26xH55mm	DC48V	≥90	300K, 400K, 600K	3240

TRACK LINEA LIGHT

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
9W	95x30mm	DC48V	≥90	300K 400K 600K	3840

5mm Magnetic Track lights

ADJUSTABLE SF CYLINDER

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	W75*H75mm	DC48V	≥90	300K, 400K, 600K	3800

TRACK LINEA LIGHT

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
9W	Ø40*H300	DC48V	≥90	300K 400K 600K	3660

5mm Magnetic Track lights

SMD PENDENT SOFT LIGHT

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	100x100mm	DC48V	≥90	300K, 400K, 600K	4680

HOSE LIGHT

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
09W	L500mm	DC48V	≥90	300K, 400K, 600K	3520
16W	L1000mm	DC48V	≥90	300K, 400K, 600K	5240
32W	L2000mm	DC48V	≥90	300K, 400K, 600K	7760

5mm Magnetic Track lights

SMD PENDENT EARTH LAMP

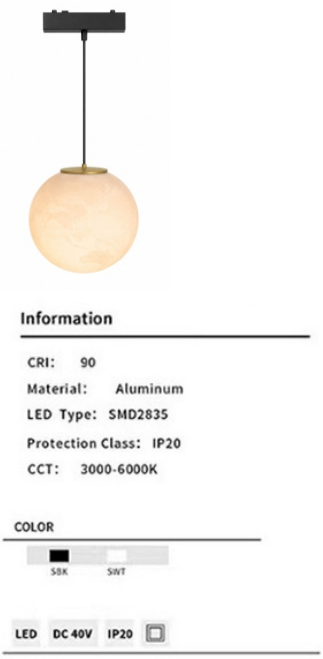

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	150*150mm	DC48V	≥90	300K, 400K, 600K	4040

SMD PROFILE LIGHT

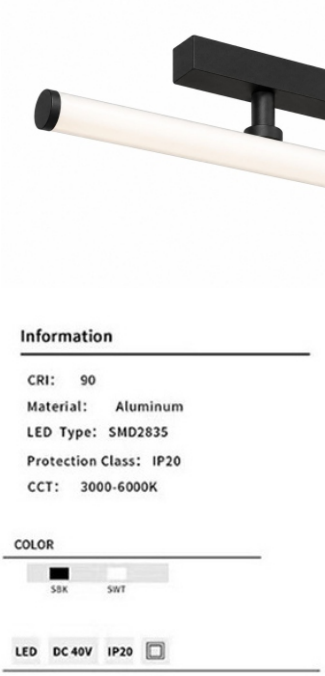

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
9W	300*26mm	DC48V	≥90	300K 400K 600K	2000

5mm Magnetic Track lights

DRIVER

WATT	PRODUCT SIZE (MM)	PRICE
100W	Size:L210xW26xH24mm	3320
200W	Size:L310xW26xH24mm	4680

SLIM SURFACE CHANNEL

PRODUCT SIZE (MM)	PRICE
Size:L1000xW26xH6.3mm	1440
Size:L2000xW26xH6.3mm	2680

SLIM CONSEAL CHANNEL

PRODUCT SIZE (MM)	PRICE
Size:L1000xW56 6xH6.3mm	1440
Size:L2000xW56 6xH6.3mm	2680

DRIVER CABLE BOX

PRODUCT SIZE (MM)	PRICE
Size:L100xW26xH29mm	600

EXTERNAL DRIVER CONNECTOR

PRICE
1200

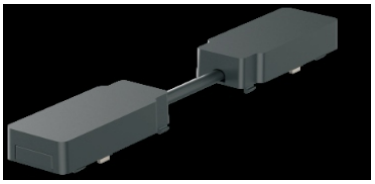

CONDUCTION MODULE

JOINTER FOR SLIM SURFACE & SLIM CONSEAL

PRICE
680

PRICE
600

PRICE
600

PRICE
920

PRICE
1000

11mm Magnetic Track lights

Magnetic Flood light

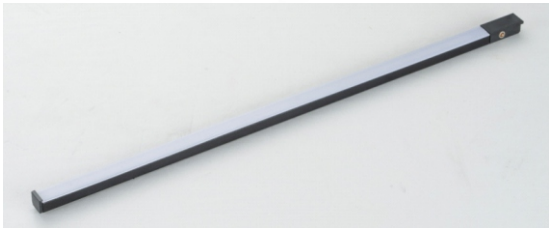

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
12W	L300*W11mm	DC48V	≥90	300K, 400K, 600K	2800

Magnetic Grille light

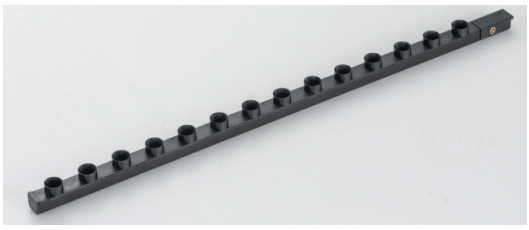

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
12W	L300*W11mm	DC48V	≥90	300K, 400K, 600K	3400

11mm Magnetic Track lights

Magnetic Floding grille light

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L118*W22*H95mm	DC48V	≥90	300K, 400K, 600K	3880
12W	L118*W22*H95mm	DC48V	≥90	300K, 400K, 600K	4800

Magnetic Spotlight

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
12W	L300*W11mm	DC48V	≥90	300K, 400K, 600K	3600

11mm Magnetic Track lights

Focusing magnetic track light

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
07W	Φ35*H90mm	DC48V	≥90	300K, 400K, 600K	3400

Magnetic Square Track Light

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR





WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
07W	64*64*44	DC48V	≥90	300K, 400K, 600K	3,520

11mm Magnetic Track lights

Micro MAGNETIC TRACK CHENNAEL	MCR-CH-01 POP CONCEAL 1MTR	Recessed (External) channel		1000*49*15mm	01 mtr	sand oxidised coated , 0.85 copper (with seal and tail plug installed) premium finish track channel	₹ 1870
	MCR-CH-01 POP CONCEAL 2MTR			1000*22*22mm	02 mtr		₹ 3746
	MCR-CH-02 SURFACE 1MTR	SURFACE		1000*19*10mm	01 mtr		₹ 1870
	MCR-CH-02SURFACE 2MTR	SURFACE		1000*19*10mm	02 mtr		₹ 3746

Micro 150W driver



PRODUCT SIZE (MM) : 82*32

Price - 4090



Concealed horizontal conncetor

PRODUCT SIZE (MM) : 50*50*10.4mm

Price - 655

Concealed horizontal conncetor

PRODUCT SIZE (MM) :50*50*10.4mm

Price - 655

Track connector

PRODUCT SIZE (MM) : 16.7*11*11.7mm

Price - 590

Track connector

PRODUCT SIZE (MM) : 17*11*7mm

Price - 1010

Concealed vertical conncetor

PRODUCT SIZE (MM) : 50*19*50mm

Price - 655

Concealed Vertical conncetor

PRODUCT SIZE (MM) : 50*19*50mm

Price - 655

25MM MAGNETIC TRACK RAIL



25MM RECESSED MAGNETIC TRACK RAIL

PRODUCT SIZE (MM)	DESCRIPTION	PRICE
MG-TRACK-01-1M	POP CONSEAL-1 MTR	1320
MG-TRACK-01-2M	POP CONSEAL-2 MTR	2420
MG-TRACK-01-3M	POP CONSEAL-3 MTR	3465

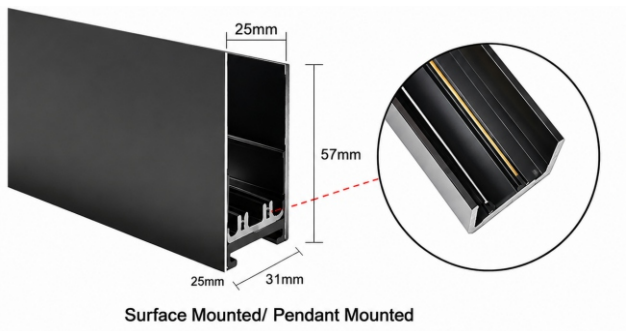

Surface Mounted/ Pendant Mounted

25MM SURFACE MOUNTED / PENDANT MOUNTED MAGNETIC TRACK RAIL

PRODUCT SIZE (MM)	DESCRIPTION	PRICE
MG-TRACK-01-1M	POP CONSEAL-1 MTR	1320
MG-TRACK-01-2M	POP CONSEAL-2 MTR	2420
MG-TRACK-01-3M	POP CONSEAL-3 MTR	3465

25MM MAGNETIC TRACK RAIL

Magnetic Profile

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED | DC 40V | IP20

PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-PROFILE-12W	12W	L307*W22*H25mm	DC48V	≥90	300K, 400K, 600K	935
MG-PROFILE-20W	20W	L607*W22*H25mm	DC48V	≥90	300K, 400K, 600K	1375

MAGNETIC LINEAR RZR SPOTLIGHTS

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED | DC 40V | IP20

PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-RZR-LINEAR-06	6W	L110*W22*H80mm	DC48V	≥90	300K, 400K, 600K	935
MG-RZR-LINEAR-12	12W	L220*W22*H80mm	DC48V	≥90	300K, 400K, 600K	1045
MG-RZR-LINEAR-20	20W		DC48V	≥90	300K, 400K, 600K	1950

25MM MAGNETIC TRACK RAIL

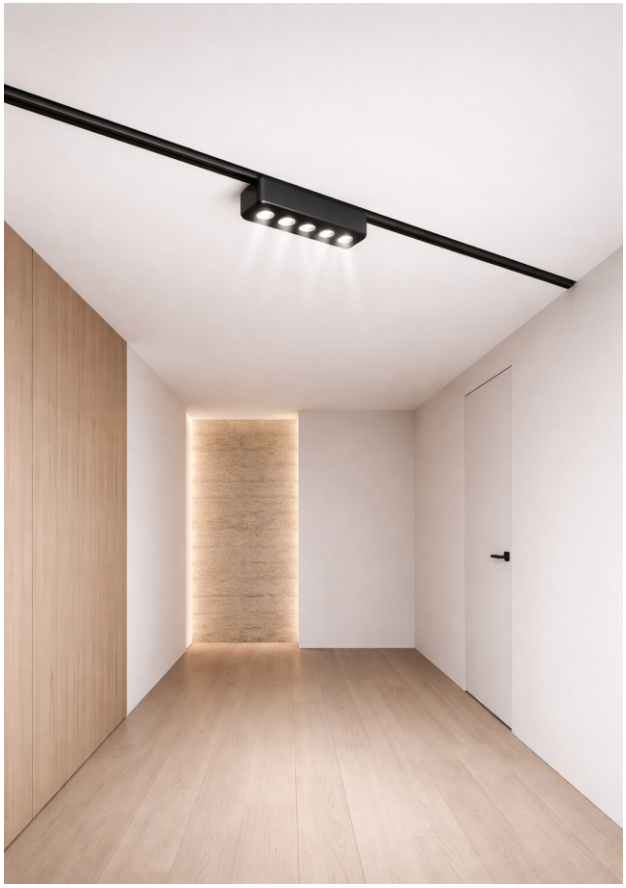

MAGNETIC LINEAR RZR MOVABLE SPOTLIGHTS

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED | DC 40V | IP20

PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-RZR-LINEAR-M-06	06W	L110*W22*H80mm	DC48V	≥90	300K, 400K, 600K	1420
MG-RZR-LINEAR-M-12	12W	L220*W22*H80mm	DC48V	≥90	300K, 400K, 600K	1685

MAGNETIC TRACK LIGHT

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED | DC 40V | IP20

PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-TRACK-10	10W	Φ48*H135	DC48V	≥90	300K, 400K, 600K	1842
MG-TRACK-20	20W	Φ48*H160	DC48V	≥90	300K, 400K, 600K	2365

25MM MAGNETIC TRACK RAIL

MAGNETIC PENDANT LIGHT

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED | DC 40V | IP20

PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-PDL-06	06W	Φ30*H300	DC48V	≥90	300K, 400K, 600K	2150
MG-PDL-12	12W	Φ94*H300	DC48V	≥90	300K, 400K, 600K	2355

MAGNETIC L-CORNER

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR

SBK SWT

LED | DC 40V | IP20

PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-L-CORNER-10	10W	Φ48*H135	DC48V	≥90	300K, 400K, 600K	2100
MG-L-CORNER-20	20W	Φ48*H160	DC48V	≥90	300K, 400K, 600K	2570

A Class of it's own...
teknolite®
LED Lighting

25MM MAGNETIC TRACK RAIL

MG-JOINTER-01

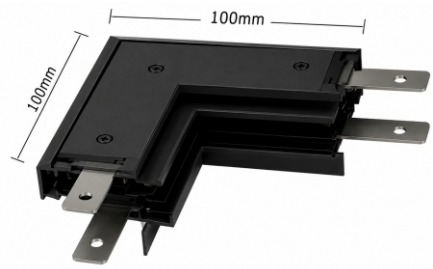

POP CONCEAL VERICAL CORNER
DLP - 650

MG-JOINTER-01

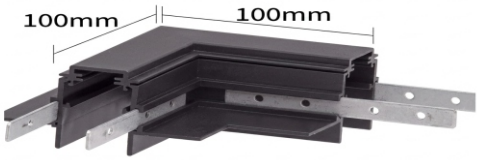

POP CONCEAL HORIZONTAL CORNER
DLP - 650

MG-JOINTER-02

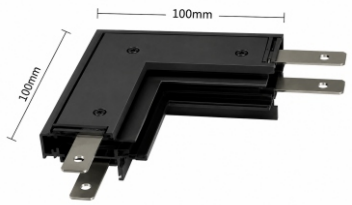

REGULAR SURFACE
VERTICAL CORNER
DLP - 650

MG-JOINTER-02

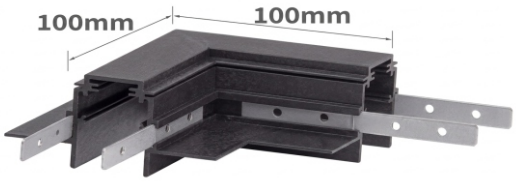

REGULAR SURFACE
HORIZONTAL CORNER
DLP - 650

MG-JOINTER-03

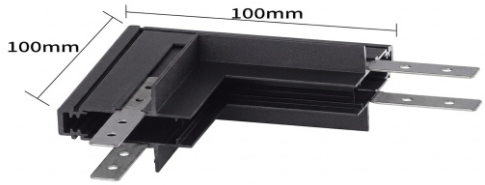

REGULAR SURFACE
VERTICAL CORNER
DLP - 650

MG-JOINTER-03

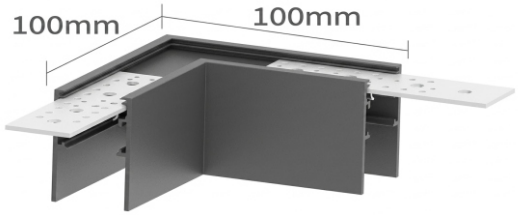

REGULAR SURFACE
HORIZONTAL CORNER
DLP - 650

MG-ENDCAP-01

R20 EMBEDDED
TRACK PLUG
DLP - 100

MG-ENDCAP-02

S20 SURFACE
TRACK PLUG
DLP - 100

A Class of it's own...
teknolite®
LED Lighting

25MM MAGNETIC TRACK RAIL

MG-DRIVER-100W

LED Single color driver 100W
Heavy duty 100% power
DLP - 2320

MG-DRIVER-200W

LED Single color driver 200W
Heavy duty 100% power
DLP - 3530

MG-MODULE-CORNER

CORNER CONDUCTIVE MODULE
DLP - 650

MG-MODULE-STATE

THROUGH CONDUCTIVE MODULE
DLP - 650

MG-INPUT-MODULE

SWITCHING POWER
INPUT MODULE
DLP - 330

MG-HANGING-WIRE

TRACK HANGING
WIRE BAG
DLP - 550

MG -SURFACE TRACK PENDANT ACCESSORY

2 PIECES
DLP - 1000

ON ORDER

CURTAIN GRAZER / WALL GRAZER

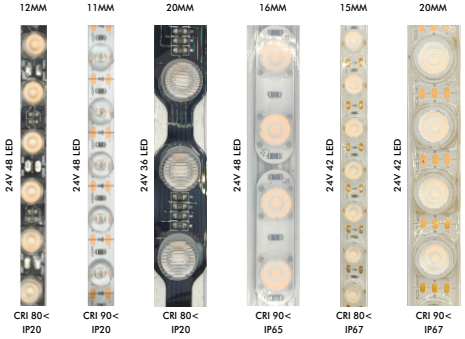

Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
3030 - 24V	48	12 MM	18 Watt	4K,3K	30°	2 Led	1210
2835 - 24V	48	11 MM	25 Watt	4K,2700K,3CCT	180°	2 Led	530
3030 - 24V	36	20 MM	15 Watt	RGB+WW	30°	6 Led	3070
2835 - 24V	48	16 MM	16.5 Watt	4K,3K	30°	2 Led	2745
2835 - 24V	42	20 MM	24 Watt	3K,27K,3CCT	30°	1 Led	2665
2835 - 24V	42	15 MM	12 Watt	4K,3K,2700K	30°	2 Led	-

2835 - 12V LED STRIPS IP20

10 piece box packing

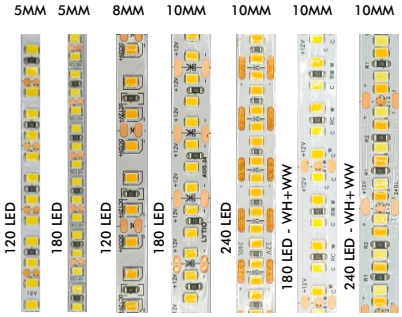

Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
2835 - 12V	120	5 MM	10 Watt	65K,4K,3K	24-26LM	80<	145
2835 - 12V	180	5 MM	15 Watt	65K,4K,3K	24-26LM	80<	240
2835 - 12V	120	8 MM	10 Watt	65K,4K,3K	24-26LM	80<	145
2835 - 12V	180	10 MM	15 Watt	65K,4K,3K	24-26LM	80<	225
2835 - 12V	240 (2 Oz)	10 MM	18 Watt	65K,4K,3K	24-26LM	80<	260
2835 - 12V	240 (3 Oz)	10 MM	20 Watt	65K,4K,3K	24-26LM	80<	405
2835 - 12V	180	10 MM	15 Watt	3CCT	24-26LM	80<	305
2835 - 12V	240	10 MM	18 Watt	3CCT	24-26LM	80<	355

2835 - 24V LED STRIPS IP20

10 piece box packing

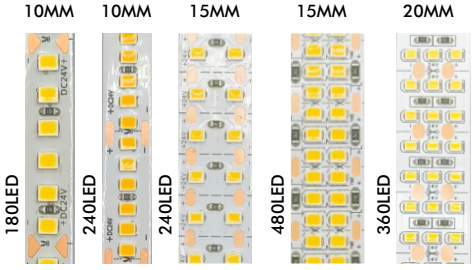

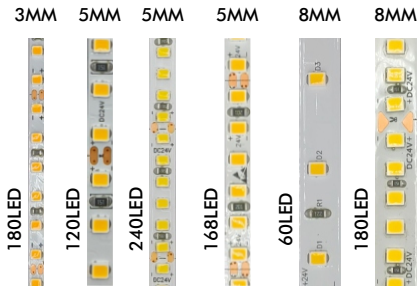

Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
2020 - 24V	180	3 MM	7 Watt	4K,3K	24-26LM	80<	
2835 - 24V	120	5 MM	10 Watt	5K,4K,3K,27K	24-26LM	80<	305
2835 - 24V	120	5 MM	10 Watt	🔵🔵🔴🟢🟡	24-26LM	80<	355
2025 - 24V	240	5 MM	11 Watt	65K, 4K,3K	24-26LM	80<	565
2835 - 24V	168	5 MM	12 Watt	65K,4K,3K	24-26LM	80<	355
2835 - 24V	120	8 MM	5 Watt	3K	24-26LM	80<	370
2835 - 24V	120	8 MM	10 Watt	65K,5K,4K,3K 35K,27K	24-26LM	80<	340
2835 - 24V	120 (E SERIES)	8 MM	12 Watt	4K,3K	24-26LM	80<	240
2835 - 24V	180 (E SERIES)	8 MM	15 Watt	65K,4K,3K	24-26LM	80<	355
2835 - 24V	60	8 MM	6 Watt	65K,4K,3K	24-26LM	80<	225
2835 - 24V	120	8 MM	10 Watt	🔵🔵🔴🟢🟡	24-26LM	80<	355
2835 - 24V	120 20MTR ROLL	10 MM	12 Watt	4K,3K	24-26LM	80<	970
2835 - 24V	180	10 MM	15 Watt	65K,4K,3K,27K	24-26LM	80<	435
2835 - 24V	240 (E SERIES)	10 MM	22 Watt	65K,4K,3K	24-26LM	80<	-
2835 - 24V	240	10 MM	20 Watt	65K,5K,4K,3K 35K,27K	24-26LM 24-26LM	80< 80<	485
2835 - 24V	240	10 MM	22 Watt	🔵🔵🔴🟢🟡			500
2835 - 24V	240 (2 LINE)	15 MM	12 Watt	65K,4K,3K	24-26LM	80<	805
2835 - 24V	480 (2 LINE)	15 MM	23 Watt	65K,4K,3K	24-26LM	80<	1290
2835 - 24V	360 (3 LINE)	20 MM	26 Watt	4K,27K	24-26LM	80<	1080

2835 - HIGH CRI LED STRIP (IP 20)

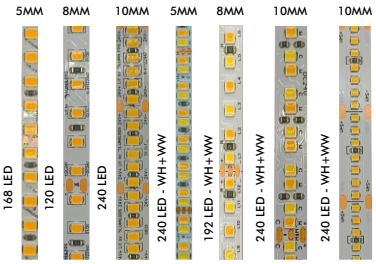

Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
2835 - 24V	168	5	10 Watt	6K,4K,3K,27K	22-24LM	92<	500
2835 - 24V	120	8	12 Watt	6K,4K,3K,27K	22-24LM	92<	405
2216 - 24V	240	10	18 Watt	6K,4K,3K,27K	22-24LM	92<	645
2835 - 24V	240	5	10 Watt	WH+WW	22-24LM	92<	-
2835 - 24V	192	8	18 Watt	WH+WW	22-24LM	92<	550
2835 - 24V	240	10	20 Watt	WH+WW	22-24LM	92<	550
2216 - 24V	280	10	22 Watt	4K,3K	20-22LM	92<	

RGB & CCT LED STRIPS (IP 20)

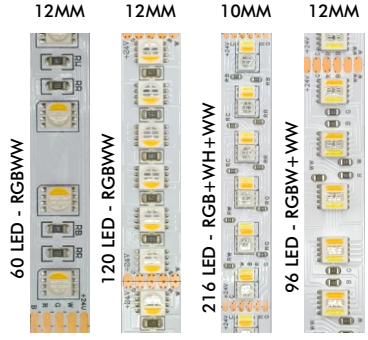

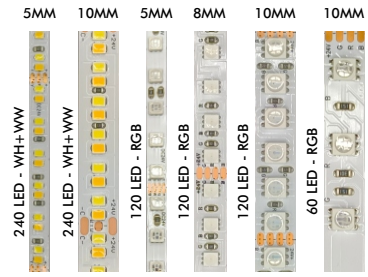

Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
2025 - 24V	240	5 MM	12 Watt	3CCT (WH+WW)	24-26LM	80<	530
2835 - 24V	120	8 MM	12 Watt	3CCT (2in1)	24-26LM	80<	550
2835 - 24V	240	10 MM	20 Watt	3CCT (WH+WW)	24-26LM	80<	550
2835 - 24V	240	10 MM	15 Watt	22K-4K CCT	24-26LM	80<	550
2835 - 24V	120	5 MM	16.8 Watt	R.G.B.	24-26LM	80<	760
3535 - 24V	120	8 MM	18 Watt	R.G.B.	24-26LM	80<	645
5050 - 24V	60	10 MM	12 Watt	R.G.B	24-26LM	80<	500
5050 - 24V	120	10 MM	12 Watt	R.G.B.	24-26LM	80<	-
5050 - 24V	60	12 MM	18 Watt	R.G.B.+WW	24-26LM	80<	725
5050 - 24V	120	12 MM	12 Watt	R.G.B.+WW	24-26LM	80<	1275
5050 - 24V	60	12 MM	18 Watt	RGB+WH	24-26LM	80<	725
3535 - 24V	216	10 MM	20 Watt	RGB+WH+WW	24-26LM	80<	1275
5050 - 24V	60	12 MM	18 Watt	RGB+WH+WW	24-26LM	80<	725
5050 - 24V	96	12 MM	24 Watt	RGB+WH+WW	24-26LM	80<	1615

COB LED STRIP - DOTLESS - 90 CRI (Ip20)

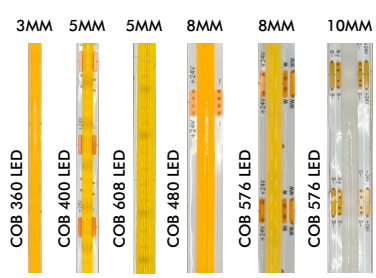

Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
COB - 24V	360	3 MM	7 Watt	2700K	22-24LM	90<	530
COB - 24V	400	5 MM	10 Watt	4K,3K	22-24LM	90<	565
COB - 24V	608	5 MM	5 Watt	CCT Tunable	24-26LM	90<	970
COB - 24V	480	8 MM	12 Watt	4K,3K,2700K	22-24LM	90<	600
COB - 24V	576	8 MM	12 Watt	CCT Tunable	22-24LM	90<	1210
COB - 24V	576	10 MM	18 Watt	R.G.B.	22-24LM	90<	1535



STDM

Power By : OSRAM LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
STDM-100	100W	13000	GRAY	65	120	390X95X100	-
STDM-200	200W	26000	GRAY	65	120	390X200X100	-
STDM-500	500W	65000	GRAY	65	120	390X510X100	-
STDM-1000	1000W	130000	GRAY	65	120	780X510X100	-

FD GL

Power By : OSRAM LED

ON ORDER: GREEN, RED & BLUE (ADDITIONAL CHARGES AS PER WATT)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
FD-30-GL	30W	390	GRAY	65	120	120X140X32	1290
FD-50-GL	50W	6500	GRAY	65	120	220x215x60	1520
FD-100-GL	100W	13000	GRAY	65	120	280x270x60	2320
FD-150-GL	150W	19500	GRAY	65	120	320x310x60	3330
FD-200-GL	200W	26000	GRAY	65	120	320x310x60	4350
FD-250-GL	250W	32500	GRAY	65	120	320x310x60	5450
FD-300-GL	300W	39000	GRAY	65	120	462X500X70	6900
FD-400-GL	400W	52000	GRAY	65	120	462X500X70	8800

FL DOB

Power By : BRIDGELUX

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
FL-DOB-50	50W	6500	GRAY	65	120	185X145	1370
FL-DOB-100	100W	13000	GRAY	65	120	240X185	2100

SL GL

Power By : OSRAM LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
SL-36	36W	4680	GRAY	65	120	128x355	1160
SL-50	50W	6500	GRAY	65	120	160x375	1450
SL-72	72W	13000	GRAY	65	120	220x510	2100
SL-100	100W	19500	GRAY	,65	120	220x510	2390
SL-150	150W	19500	GRAY	,65	120	220x510	4060
SL-200	200W	19500	GRAY	,65	120	220x510	5070

SL SOLAR

Power By : BRIDGELUX

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
SLSR-60	60W	7200	GRAY	65	90/120	-	
SLSR-120	120W	9600	GRAY	65	90/120	-	
SLSR-180	180W	12000	GRAY	65	90/120	-	

ALUMINIUM DOME
Rs. 300 EXTRA

UFO HB

Power By : OSRAM LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
UFO-50	50W	6500	GRAY	65	120	310x220	3001
UFO-100	100W	13000	GRAY	65	120	310x220	4433
UFO-150	150W	19500	GRAY	65	120	360x220	5393
UFO-200	200W	26000	GRAY	65	120	310x220	6187

HB UFO FLAMMABLE IP 65

Power By : BRIDGELUX

SAUCER WELL GLASS LIGHT (HEAVY WEIGHT)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
UFO-FL-60	60W	7200	GRAY	65	90/120		11051
UFO-FL-80	80W	9600	GRAY	65	90/120		12488
UFO-FL-100	100W	12000	GRAY	65	90/120		13983

A Class of it's own...

teknolite®

LED Lighting

LED WALL LAMPS & MIRROR LIGHTS

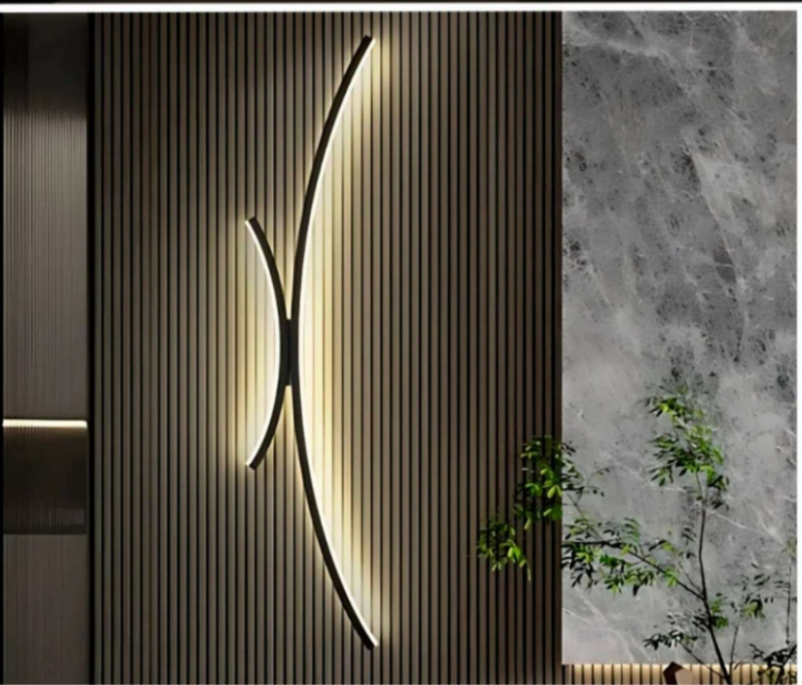

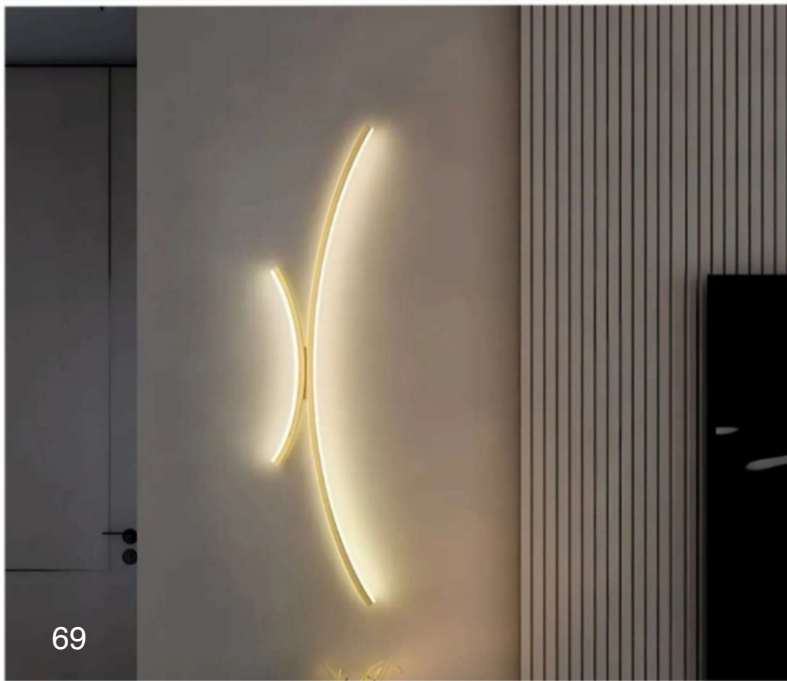

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-199	10W	H:240	1632

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-200	10W	H:240	1632

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-201	10W	H:240	1632

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-202	10W	H:240	1632

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-203	10W	H:240	1632

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-204	10W	H:240	1632

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-205	12W	H:600	2052

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-206	18W	H:600	2130

LED Colour : 4000K/3000K



WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-207	20W	H:600	2130

LED Colour : 4000K/3000K



WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-208	24W	H:600	2130

LED Colour : 4000K/3000K



WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-209	24W	H:600	2130

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-210	24W	H:600	2130

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-211	16W	H:600	2004

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-212	12W	H:600	1878

LED Colour : 4000K/3000K



WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-213	16W	H:600	1878

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-214	16W	H:600	2052

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-215	24W	H:900	2202

LED Colour : 4000K/3000K



WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-284	6W	H:240	1800

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-266	20W	H:240	2454

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-272	15W	H:240	1944

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-274	20W	H:240	2478

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-276	15W	H:600	2130

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-278	18W	H:600	2004

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-292	24W	H:600	1878

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	Body Color	DLP
WL-294	18W	H:460	WB-BB	1632
WL-294	18W	H:460	RB-GL-RG BRONZE	1752

LED Colour : 4000K/3000K **10 PCS box packing**

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-290	20W	H:240	2880

LED Colour : 4000K/3000K

PML10CC

Model	Watt	Dimension(mm)	DLP
PML-10-CC	10W	2 Ft x 50mm x 72mm	-

LED Colour : 4000K/3000K

WL Power By : **TEEN** LED

Model	Watt	Dimension(mm)	DLP
WL-650	10W	190x291	1380

LED Colour : 4000K/3000K

A Class of it's own...

teknolite®

LED Lighting

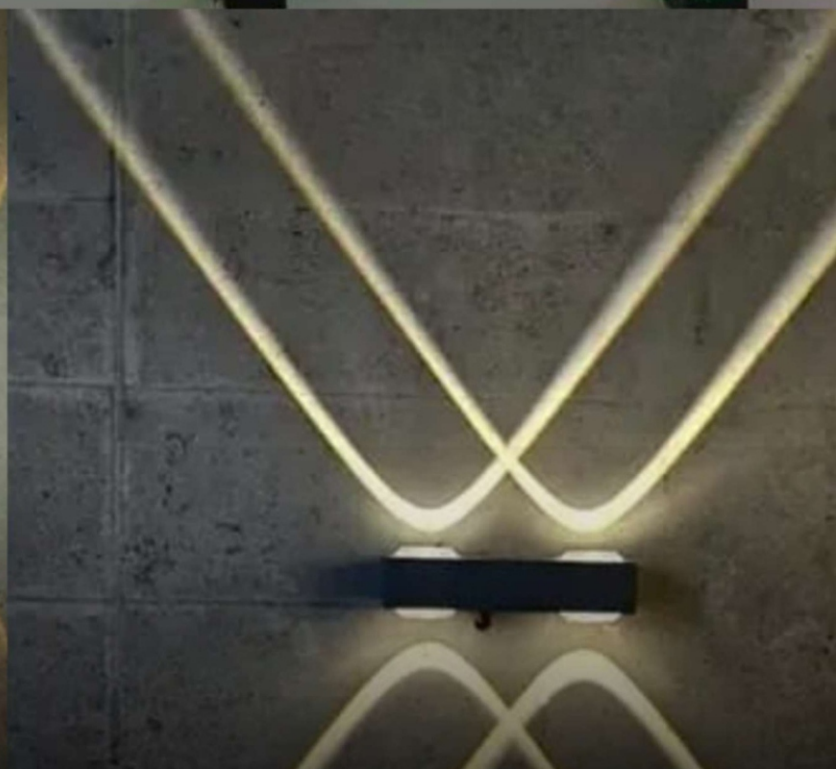

OUTDOOR IP65 WATERPROOF

Aluminum lamp body, outdoor effective waterproof rain seamless access

LED GATE LIGHTS

POLY CARBONATE HOUSING

ROYAL

Wattage : **20W**

Color : W/WW

DLP : ₹1945/-

LOBINI

Wattage : **30W**

Color : W/WW

DLP : ₹2815/-

ZEN

Wattage : **20W**

Color : W/WW

DLP : ₹1560/-

FOTON

Suitable for LED Bulb

Color : W

DLP : ₹ 950/-

ORA

Wattage : **20W**

Color : W/WW

DLP : ₹1375/-

ALPINA

Wattage : 20W

Color : w/ww

DLP : ₹1500/-

ACURA

Wattage : 20W

Color : w/ww

DLP : ₹2500/-

KEERA

Wattage : 20W

Color : w/ww

DLP : ₹2250/-

MOON

Suitable for LED Bulb

Color : W

DLP : ₹ 1125/-

OBH

Power By : **TEEN** LED

LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OBH - 10	10W	1200	WHITE	65	120	230
OBH 20	20W	2400	WHITE	65	120	320

PENTA-10

Power By : **TEEN** LED

LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
PENTA-10	10W	1200	WHITE	65	120	170X6845	400

GL 115

Power By : **TEEN** LED

LED Colour : 3000K, 4000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
GL-115	5W	1200	BLACK	65	120	690
GL-165	10W	1000	BLACK	65	120	810

ODL

Power By : **TEEN** LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL-452 (TWO WAY)	3W	250	GRAY/ BLACK	65	45	80x60x35	561

ODL

Power By : **TEEN** LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL-452/2 (FOUR WAY)	5W	345	GRAY/ BLACK	65	45	80x110x35	810

ODL

Power By : **TEEN** LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL-452/3 (SIX WAY)	7W	455	GRAY/ BLACK	65	45	80x160x35	1074

ODL

Power By : **TEEN** LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL-452/4 (EIGHT WAY)	10W	960	GRAY/ BLACK	65	45	80x210x35	1488

ODL

Power By : **TEEN** LED

LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL104S	3W	GRAY	65	80	696
ODL104	6W	GRAY	65	80	768

ODL

Power By : TEEN LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-103S	2x3W	GRAY	65	80	838
ODL-103	2x6W	GRAY	65	80	958

LED Colour : 3000K

Dimension (mm)



ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-419	3W	GRAY	65	45	798
ODL-419	6W	GRAY	65	45	1110

LED Colour : 3000K

Dimension (mm)



ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-454	10W	GRAY	65	110	1123

LED Colour : 3000K



ODL

Power By : TEEN LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-415	7W	GRAY	65	90	1137

LED Colour : 3000K

Dimension (mm)



ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-416	3W	GRAY	65	45	726

LED Colour : 3000K

Dimension (mm)



ODL

Power By : TEEN LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-453	10W	BLACK	65	60	1176

LED Colour : 3000K

Dimension (mm)



ODLS

Power By : TEEN LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-438S	4W	WB-GRAY	65	45	828

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **TEEN** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-438	8W	WB-GRAY	65	45	876

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **TEEN** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-466	6W	GRAY	65	45	984

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-467	4W	GRAY	65	55	960
ODL-467	6W	GRAY	65	55	1080

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-456	3W	WB-GRAY	65	45	698

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-445	5W	WB-GRAY	65	45	848
ODL-445	12W	WB-GRAY	65	45	1248
(2 LEG)-ODL-445-S	3W	WB GRAY	65	45	792

LED Colour : 3000K

Dimension (mm)



ODLS

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-464S (One leg)	1W	WB-GRAY	65	45	561

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-464	3W	WB-GRAY	65	45	612

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-425-2	5W	GRAY	65	45	882
ODL-425-3	7W	GRAY	65	45	1002

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **TEEN** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-426-1	3W	GRAY	65	45	960

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-426-2	5W	GRAY	65	45	1020

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-426-3	7W	GRAY	65	45	1140

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-423	4W	GRAY	65	45	996

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-475	5W	GRAY	65	45	948

LED Colour : 3000K

Dimension (mm)



ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-405	10W	GRAY	65	120	1080
ODL-406	16W	GRAY	65	120	1200

LED Colour : 3000K

Dimension (mm)



ODL Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-431	16W	GRAY	65	360	2065

LED Colour : 3000K

Dimension (mm)





ODL Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-450	14W	RD / SG	65	360	2065

LED Colour : 3000K

Dimension (mm)



ODL Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/1	1W	Black+Gold	65	25	660

LED Colour : 3000K

Dimension (mm)



ODL Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/2	2W	Black+Gold	65	25	811

LED Colour : 3000K

Dimension (mm)



ODL Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/3	3W	Black+Gold	65	25	964

LED Colour : 3000K

Dimension (mm)



ODL Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/Y	4W	Black+Gold	65	25	1116

LED Colour : 3000K

Dimension (mm)



ODL Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/X	4W	Black+Gold	65	25	1116

LED Colour : 3000K

Dimension (mm)



ODL 474/4

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/4	4W	Black+Gold	65	25	1116

LED Colour : 3000K

Dimension (mm)



ODL 474/5

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/5	5W	Black+Gold	65	25	1295

LED Colour : 3000K

Dimension (mm)





ODL 474/6

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/6	6W	Black+Gold	65	25	1421

LED Colour : 3000K

Dimension (mm)





ODL 474/8

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/8	8W	Black+Gold	65	25	1650

LED Colour : 3000K

Dimension (mm)





ODL 4094

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-4094	4W	Black	65	50	1010

LED Colour : 3000K



ODL 409/8

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-409/8	8W	Black	65	50	1282

LED Colour : 3000K

ODL 409/12

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-409/12	12W	Black	65	50	1584

LED Colour : 3000K



ODL 445/ LENS

Power By : TEEN LED

Model	Watt	Body	IP Rating	Beam Angle	DLP
ODL-445/L	5W	Black/ Grey	65	25	990



ODL 407

Power By : EDISON LED

Model	Watt	Body	IP Rating	Beam Angle	DLP
ODL-407	2W	Black	65	75	904



ODL 408

Power By : EDISON LED

Model	Watt	Body	IP Rating	Beam Angle	DLP
ODL-408	2W	Black	65	50	904

OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL-101	4W	GRAY	65	100	762

LED Colour : 2700 to 6500K

Dimension (mm)



OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL-102	6W	GRAY	65	100	1008

LED Colour : 2700 to 6500K

Dimension (mm)



OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL-727	5W	GRAY	65	100	612

LED Colour : 2700 to 6500K

Dimension (mm)



FL-SENSOR

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
FL-0103-SQ-MON	3W	WB-BB-GB	65	100	1000
FL-0103-SQ	3W	WB-BB-GB	65	100	780
FL-0103-RD-MON	3W	WB-BB-GB	65	100	1000
FL-0103-RD	3W	WB-BB-GB	65	100	780

LED Colour : 2700 to 6500K

Dimension (mm)

OCL

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OCL-201	5W	500	WB-BB	65	100	436

LED Colour : 3000K

Dimension (mm)



OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL-730	5W	WB-GRAY	65	100	516

LED Colour : 3000K

Dimension (mm)



OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL-723	3W	WB-GRAY	65	90	648

LED Colour : 3000K

Dimension (mm)



OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL-103	5W	GRAY	65	100	510

LED Colour : 3000K

Dimension (mm)





OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL-702	8W	GRAY	65	100	748

LED Colour : 3000K

Dimension (mm)



OFL

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OFL-105-9	9W	900	GRAY	65	100	1056

LED Colour : 3000K

Dimension (mm)



ODL0402

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL-0402	6W	780	BLACK	65	100	875

LED Colour : 3000K

Dimension (mm)

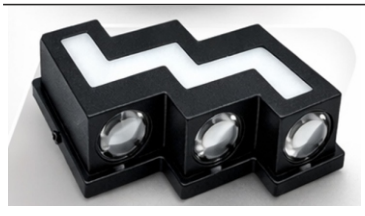

ODL0602

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL-0602	8W	1040	BLACK	65	100	938

LED Colour : 3000K

Dimension (mm)

FLORA

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
FLORA-2	2W	260	BLACK	65	100	700

LED Colour : 3000K
Dimension (mm)



OPAL2

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OPAL-2	2W	260	BLACK	65	100	290

LED Colour : 3000K
Dimension (mm)

ARIES

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ARIES-3	3W	390	BLACK	65	100	290

LED Colour : 3000K
Dimension (mm)

LIME

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
LIME-3	3W	390	BLACK	65	100	265

LED Colour : 3000K
Dimension (mm)

FLOAT

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
FLOAT-3	3W	390	BLACK	65	100	265

LED Colour : 3000K
Dimension (mm)

ODL570

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL-570	8W	1040	BLACK	65	100	1125

LED Colour : 3000K
Dimension (mm)

ODL560

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL-560	6W	780	BLACK	65	100	938

LED Colour : 3000K
Dimension (mm)

GEO4

Power By : **EDISON** LED

POLY-CARBONATE

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
GEO-4	4W	520	BLACK	65	100	400

LED Colour : 3000K

Dimension (mm)

OPAL4

Power By : **EDISON** LED

POLY-CARBONATE

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OPAL-4	4W	520	BLACK	65	100	490

LED Colour : 3000K

Dimension (mm)

FSD

Power By : **TEEN** LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
FSD0-212	12W	1440	GRAY	65	5/**10**	1265
FSD0-218	18W	2160	GRAY	65	5/**10**	1552
FSD0-212	24W	2880	GRAY	65	5/**10**	2100
FSD0-212	12W	1440	R-G-B	65	5/**10**	2118

L
ED Colour : 3000K

Dimension (mm)



FSD0212 FSD0218

FSD - SQ

Power By : **TEEN** LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension	DLP
FSD0-24	24W	2880	GRAY	65	5/**10**	100x165x85	6418
FSD0-24-HOOD	24W	2880	GRAY	65	5/**10**	100x165x85	6545

ASK

Power By : **TEEN** LED

Model	Watt	Dimension (mm)	DLP
ASK-004	36	400X300	ON ORDER
ASK-004	50	400X300	ON ORDER

LED Colour : 3000K

ASK

Power By : **TEEN** LED

Model	Watt	Dimension (mm)	DLP
ASK-005	36	475X200	ON ORDER
ASK-005	50	475X200	ON ORDER

LED Colour : 3000K

ASK

Power By : **TEEN** LED

Model	Watt	Dimension (mm)	DLP
ASK 006	36X2	400X2X300	ON ORDER
ASK 006	50X2	400X2X300	ON ORDER

LED Colour : 3000K

ALL MODELS 10 PC BOX PACKING

SK

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	Beam Angle	DLP
SK11-6	6W	600	BB-GRAY	3000K	65	36	587
SK-11-R/G/B	6W	600	BB-GRAY	RGBRGB	65	36	636
SK-11	8W	960	BB-GRAY	3000K	65	36	710

R | G | B

LED Colour : 3000K

Dimension (mm)



SK

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	Beam Angle	DLP
SK-16	6W	600	BB	3000K	65	48	698
SK16-8	8W	960	BB	3000K	65	48	860

LED Colour : 3000K

Dimension (mm)



SK

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	Beam Angle	DLP
SK-8	8W	960	BB	3000K	65	48	1197
SK8-12	12W	1440	BB	3000K	65	48	1320
SK8-20	20W	1800	BB	3000K	65	48	1616

LED Colour : 3000K

Dimension (mm)



SK

Model	Holder	Body Colour	IP Rating	DLP
SK08/BH	GU10	BB	65	756

Dimension (mm)



SK

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	MRP
SK-712	12W	1440	BB	65	25-38	1320

LED Colour : 3000K

Dimension (mm)



SK

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	MRP
Sk-0207	7W	720	GRAY	65	54	1260
SK-0212	12W	1440	GRAY	65	54	1848
Sk-0215	15W	1800	GRAY	65	54	2220

LED Colour : 3000K

Dimension (mm)



BOLARD

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	BATTERY	SOLAR PANEL	DLP
SL-BLR-RD	3W	100	BB	WW	65	1500mah	1.3W	
SL-BLR-SQ	3W	100	BB	WW	65	1500mah	1.3W	

GATE LIGHT

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	BATTERY	SOLAR PANEL	DLP
SL-GL-RD	3W	100	BB	WW	65	1500mah	1.3W	
SL-GL-SQ	3W	100	BB	WW	65	1500mah	1.3W	

SPIKE LIGHT

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	BATTERY	SOLAR PANEL	DLP
SL-SPK-WW	5W	100	BB	WW	65	1200mah	5W 2V	
SL-SPK-RGB	5W	100	BB	RGB	65	1200mah	5W 2V	

TERMS

1. Request to all customers to give length sizes of pole and bollard in feet for accuracy.
2. 50% Advance payment at the time of P.O. & remaining before delivery.
3. Transportation and loading charge extra*.

BLL

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-116	16W	300	ON ORDER
BLL-117	16W	600	ON ORDER

LED Colour : 3000K

BLL

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-109	12W	300	ON ORDER

LED Colour : 3000K

BLL

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-125	12W	300	ON ORDER

LED Colour : 3000K

BLL

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-129	12W	300	ON ORDER

LED Colour : 3000K

BLL RD

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-RD-137	14W	300	ON ORDER
BLL-RD-138	14W	600	ON ORDER

LED Colour : 3000K

BLL SQ

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-SQ-139	14W	300	ON ORDER
BLL-SQ-140	14W	600	ON ORDER

LED Colour : 3000K

BLL

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-127	12W	300	ON ORDER
BLL-128	12W	600	ON ORDER

LED Colour : 3000K

BLL

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-131	12W	300	ON ORDER
BLL-132	12W	600	ON ORDER

LED Colour : 3000K

BLL

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-133	12W	300	ON ORDER

LED Colour : 3000K

BLL

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-135	24W	300	ON ORDER

LED Colour : 3000K

BLL

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-133	12W	300	2400
BLL-133	12W	600	3000
BLL-133	12W	900	ON ORDER

LED Colour : 3000K

BLL

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
BLL-134	12W	300	2400
BLL-134	12W	600	3000
BLL-134	12W	900	ON ORDER

LED Colour : 3000K

ON ORDER

Note: The prices of the all the bollards and poles are variable and may increase from time to time. Please contact our sales person before placing your order.

NEON FLEX

SHAPE YOUR SPACE WITH LIGHT

Modern LED Strip Lighting for Stunning Interiors

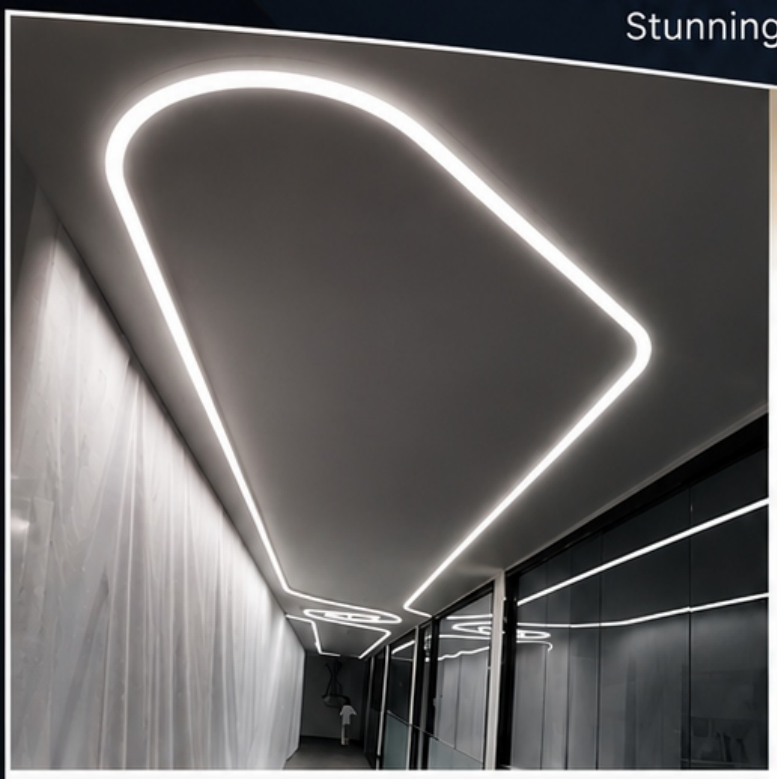

SLEEK & MODERN
Clean lines, contemporary elegance

CUSTOM DESIGNS
Curves, shapes & contours tailored to your space

ENERGY EFFICIENT
Low power, high impact illumination

DURABLE & SAFE
Long-lasting LED technology built for all environments

TEKNOLITE

SILICON FLEX PROFILE SERIES

1 YEARS WARRANTY

PRODUCT CODE
1010 FL



FLEX SIZE
10 x 10mm

STRIP SIZE:
PCB 5mm

● AVAILABLE WITH STRIP

1010 TOP
5mm PCB

PRODUCT CODE
1212 FL

FLEX SIZE
12 x 12mm

STRIP SIZE:
PCB 8mm

● AVAILABLE WITH STRIP

1212 TOP
8mm PCB

PRODUCT CODE
1616 FL

FLEX SIZE
16 x 16mm

STRIP SIZE:
PCB 8-12mm

● AVAILABLE WITH STRIP

1616 TOP
8-12mm PCB

PRODUCT CODE
2014 FL

FLEX SIZE
20 x 14mm

STRIP SIZE:
PCB 8-12mm

● AVAILABLE WITH STRIP

2014 TOP
8-12mm PCB

PRODUCT CODE
1322 V

TWO SIDE V GROOVE FLEX



1322 TOP VIEW
5mm PCB

FLEX SIZE:
13 x 22mm

STRIP SIZE:
PCB 5mm

PRODUCT CODE
0410 SL

FLEX SIZE
04 x 10mm

STRIP SIZE:
PCB 5mm



0410 SIDE VIEW
5mm PCB

PREMIUM QUALITY SILICONE

FLEXIBLE & DURABLE

WATER & DUST RESISTANT

EASY TO INSTALL & MAINTAIN

TEKNOLITE

SILICON FLEX PROFILE SERIES

1 YEARS WARRANTY

PRODUCT CODE
0612 SL
SIDE LIGHT

FLEX SIZE:
06 x 12mm

STRIP SIZE:
PCB 8mm

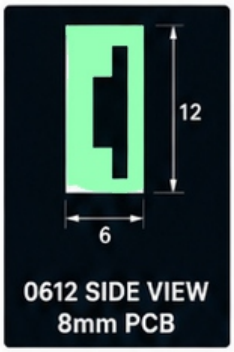

0612 SIDE VIEW
8mm PCB

PRODUCT CODE
1010 3SL
3 SIDE LIGHT

FLEX SIZE:
10 x 10mm

STRIP SIZE:
PCB 5mm



1010 THREE SIDE
5mm PCB

PRODUCT CODE
1616 3SL
3 SIDE LIGHT

FLEX SIZE:
16 x 16mm

STRIP SIZE:
PCB 8-10 mm



1616 THREE SIDE
8-10mm PCB

PRODUCT CODE
1513 3SL
3 SIDE 270°

FLEX SIZE:
15 x 13mm

STRIP SIZE:
PCB 8-10mm

1513 THREE SIDE
8-10mm PCB

PRODUCT CODE
D22 360°
360° LIGHT

FLEX SIZE:
Diameter 22mm

STRIP SIZE:
PCB 5mm

D22mm 360°
5mm PCB

PRODUCT CODE
1010 BLFL
FRONT LIGHT

FLEX SIZE:
10 x 10mm

STRIP SIZE:
PCB 5mm



1010 TOP
5mm PCB

PRODUCT CODE
1616 BLFL
FRONT LIGHT

FLEX SIZE:
16 x 16mm

STRIP SIZE:
PCB 8-12mm



1616 TOP
8-12mm PCB

ACCESSORIES
CLIP & COVER

ENDCAP:
With Hole / Plain

CLIP:
Set / String

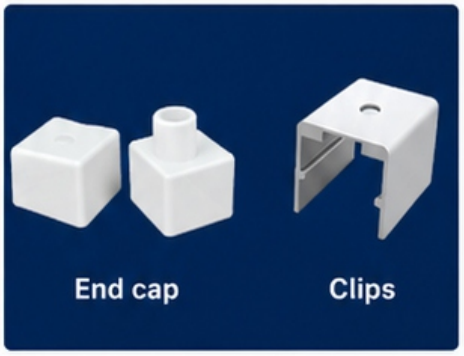

PREMIUM QUALITY SILICONE | FLEXIBLE & DURABLE | WATER & DUST RESISTANT | EASY TO INSTALL & MAINTAIN

RECESSED/ SURFACE PROFILE

PRODUCT CODE	PRODUCT	SIZE	MODEL NAME	QTY	DLP
TPF-007			7MM	2 MTRS	ON ORDER BLACK: ON ORDER
TPF-010			10MM CON	2 MTRS	ON ORDER
TPF-012			12MM CON	2 MTRS	ON ORDER
TPF-017			17MM CON	2 MTRS	ON ORDER BLACK: ON ORDER
TPF-007-SF			7MM SF	2 MTRS	ON ORDER BLACK: ON ORDER
TPF-010-SF			10MM SF	2 MTRS	ON ORDER
TPF-012-SF			12MM SF	2 MTRS	ON ORDER
TPF-017-SF			17MM SF	2 MTRS	ON ORDER BLACK: ON ORDER
TPF-025-CONL			25MM CON	2 MTRS	ON ORDER
TPF-035-CONL			35MM CON	2 MTRS	ON ORDER
TPF-LDP-035-CONL			LOW DEEP PROFILE 35MM CON	2 MTRS	ON ORDER
TPF-050-CONL			50MM CON	2 MTRS	ON ORDER
TPF-LDP-035-CONL			LOW DEEP PROFILE 35MM SF	2 MTRS	ON ORDER
TPF-035-SF			35MM SF	2 MTRS	ON ORDER
TPF-025-SF			25MM SF	2 MTRS	ON ORDER
TPF-050-SF			50MM SF	2 MTRS	ON ORDER
TPF-LDP-050-SF			LOW DEEP PROFILE 50MM SF	2 MTRS	ON ORDER
TPF-075-SF			75MM SF	2 MTRS	ON ORDER

RECESSED/ SURFACE PROFILE

PRODUCT CODE	PRODUCT	SIZE	MODEL NAME	QTY	DLP
TPF-CORNER			CORNER	2 MTRS	ON ORDER
TPF -LDP-050-CONL			LOW DEEP PROFILE 50MM CON	2 MTRS	ON ORDER
TPF -BENDABLE			Bendable	2 MTRS	ON ORDER
TPF-055-SF			55MM SF	2 MTRS	ON ORDER
TPF-075-CONL			75MM CON	2 MTRS	ON ORDER
TPF-017-DP			DEEP PROFILE 17 MM SF	2 MTRS	ON ORDER
TPF-017-DPC			DEEP PROFILE 17 MM CON	2 MTRS	ON ORDER

SIZES: 300|600|900|1200 MM **BODY COLOR: WHITE &BLACK (AVAILABLE ON ORDER, 100% ADVANCE PAYMENT)**

TERMS

1. Hanging/Suspension kit will be charged extra for profiles.
2. Request to all customers to give length sizes of profiles in milimeters for accuracy.
3. Any customized design will be chargeable for fabrication work @ 10% of net value of profiles, power supply cost excluded.
4. Profile's order once placed will not be changed or cancelled.
5. 100% Advance payment at the time of P.O. & remaining before delivery.
6. Any profiles with PCB the size should be given in multiples of 50mm & for wire out let 10mm extra for each profiles.
7. Minimum Order Quantity is 100 Meters for Empty Housing Profiles.

A Class of it's own...

teknolite®

LED Lighting

FACADE & LANDSCAPE LIGHTING SYSTEMS

INDUSTRIAL LIGHTING

VIBRANT COLORS | SMART CONTROL | TAILORED SOLUTIONS | RELIABLE PERFORMANCE | ENERGY EFFICIENT

Each product is developed using quality components and modern manufacturing practice to ensure long life, consistent illumination and dependable performance.

***100% Advance payment and no return material**

***Packing charge Rs.300/- extra**

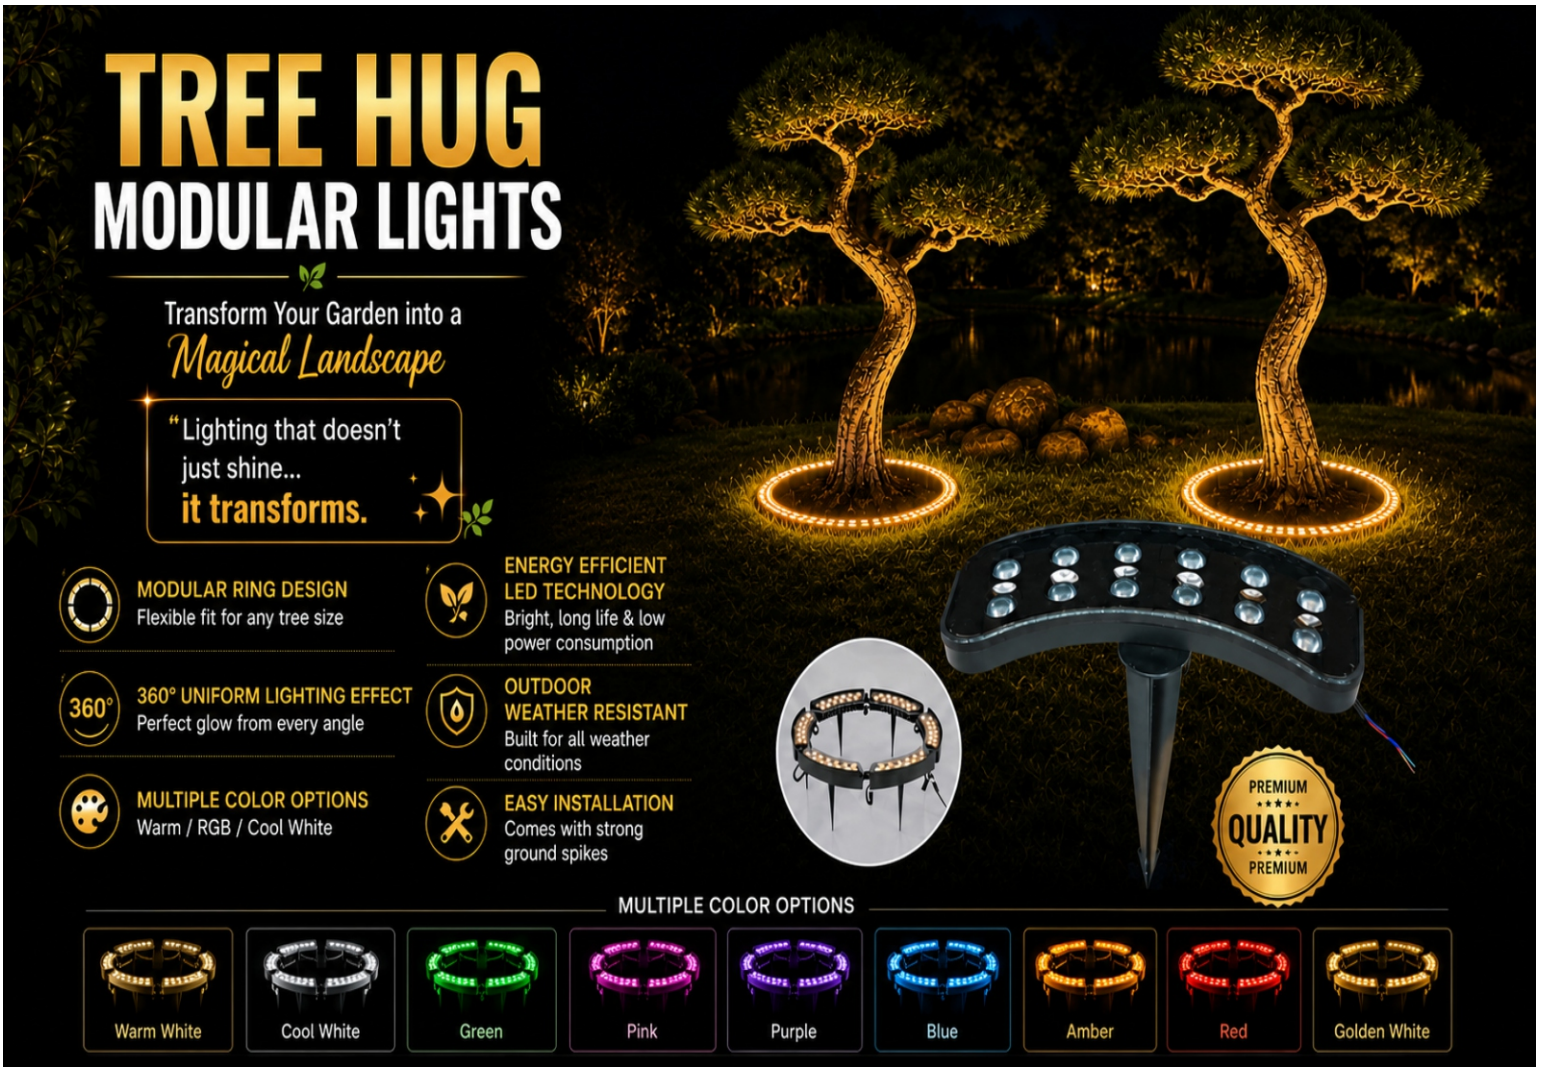

CUSTOMIZABLE PRICING

Model Code	Colour Options	Power Range	Voltage	IP Rating	Application
TL-WL-12-24-404	WW / RGB / RGBW	12–24 W	230V AC / 24V DC	IP65	Tree Trunk Lighting
TL-WL-36-48-404	WW / RGB / RGBW	36–48 W	230V AC / 24V DC	IP65	Tree Trunk Lighting
TL-WL-60-72-404	WW / RGB / RGBW	60–72 W	230V AC / 24V DC	IP65	Tree Trunk Lighting
TL-WL-84-96-404	WW / RGB / RGBW	84–96 W	230V AC / 24V DC	IP65	Tree Trunk Lighting
TL-WL-108-120-404	**WW / RGB / RGBW**	108–120 W	**230V AC / 24V DC**	**IP65**	**Tree Trunk Lighting**

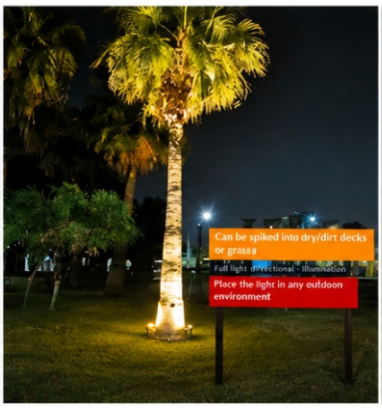

A Class of it's own...

teknolite®

LED Lighting

PIXEL BAR LIGHT

LINEAR PROFILE / MEDIA FACADE LIGHTS

TL406

HIGH EFFICIENCY LED | OUTDOOR RATED | DMX512 COMPATIBLE | PIXEL ADDRESSABLE | ALUMINIUM PROFILE

FEATURES & BENEFITS

Category:	Pixel Bar / Media Facade Light
Light Source:	High Efficiency LED (Mono / RGB / RGBW / RGBWW)
Housing:	Aluminium Profile
Diffuser:	Polycarbonate / Toughened Lens
Control:	RGB, RGBW for dynamic lighting and media façade
Voltage:	24V DC
IP Rating:	IP65
Mounting:	Surface Mounted (Overground)
Application:	Outdoor
Body Colour:	Black / Dark Grey / Silver Grey

PRODUCT DESCRIPTION

TL406 is a high-performance linear pixel bar designed for dynamic media façade and architectural lighting applications. Built with an aluminium profile housing and precision optical system, it delivers uniform linear output for static or programmable lighting effects.

Available in Mono, RGB, RGBW and RGBWW configurations with DMX512 control for dynamic colour rendering in façade and media installations.

ARCHITECTURAL ACCENT LIGHTING | MEDIA FAÇADE SOLUTIONS | DURABLE & RELIABLE | VIBRANT COLOURS & EFFECTS

TECHNICAL DATA

MODEL CODE	COLOUR OPTIONS	POWER	VOLTAGE	CONTROL	IP RATING	APPLICATION
TL406-MONO	Mono LED	12–15 W	24V DC	ON / OFF / DMX / RDM	IP65 / IP67	Media Façade
TL406-RGB	RGB LED	12–15 W	24V DC	ON / OFF / DMX / RDM	IP65 / IP67	Media Façade
TL406-RGBW / RGBWW	RGBW / RGBWW LED	12–15 W	24V DC	ON / OFF / DMX / RDM	IP65 / IP67	Media Façade

BUILT FOR PERFORMANCE

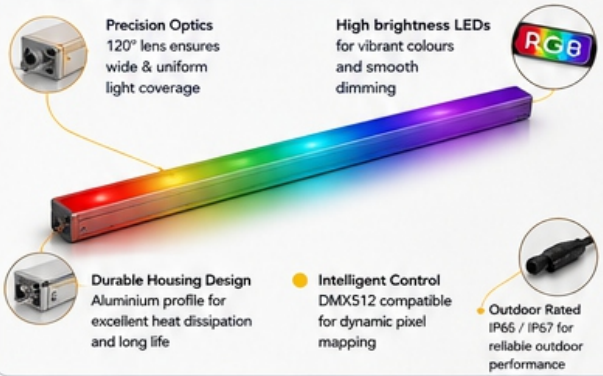

KEY FEATURES

STATIC	Ideal for static architectural accent lighting.
DIMMABLE	Smooth dimming for custom ambience.
DYNAMIC (DMX)	DMX512 control for dynamic colour and effects.
PIXEL ADDRESSABLE	Individual pixel control for stunning media façades.

BODY COLOUR OPTIONS

BLACK

SILVER GREY

DARK GREY

WALL WASHER SF-24V

Power By : OSRAM LED

Model	Watt	Dimensions	Body Colour	LED Colour	IP Rating	Voltage	DLP
WL-WS-SF-9	9W	L-300mm x W-35mm H-25mm wire-1ft	BB-GRAY	NW-WW-WH	65	24VDC	5000
WL-WS-SF-18	18W	L-600mm x W-35mm H-25mm wire-1ft	BB-GRAY	NW-WW-WH	65	24VDC	8250
WL-WS-SF-27	27W	L-900mm x W-35mm H-25mm wire-1ft	BB-GRAY	NW-WW-WH	65	24VDC	8950
WL-WS-SF-30	30W	L-1000mm x W-35mm H-25mm wire-1ft	BB-GRAY	NW-WW-WH	65	24VDC	9700
WL-WS-SF-36	36W	L-1200mm x W-35mm H-25mm wire-1ft	BB-GRAY	NW-WW-WH	65	24VDC	10800

WALL WASHER SF-220V

Power By : OSRAM LED

Model	Watt	Dimensions	Body Colour	LED Colour	IP Rating	Voltage	DLP
WL-WS-SF-6	6W	L-168mm x W-43mm H-48mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	4950
WL-WS-SF-11	11W	L-300mm x W-43mm H-48mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	8000
WL-WS-SF-22	22W	L-600mm x W-43mm H-48mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	8550
WL-WS-SF-33	33W	L-900mm x W-43mm H-45mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	9200
WL-WS-SF-45	45W	L-1200mm x W-43mm H-45mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	10000

LINEAR INGROUND

Power By : OSRAM LED

Model	Watt	Dimensions	Body Colour	LED Colour	IP Rating	Voltage	DLP
LIN-6	6W	L-210mm x W-37mm H-35mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	5600
LIN-9	9W	L-330mm x W-60mm H-35mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	8400
LIN-18	18W	L-630mm x W-60mm H-35mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	9200
LIN-27	27W	L-930mm x W-60mm H-35mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	11500
LIN-36	36W	L-1230mm x W-60mm H-35mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	13000

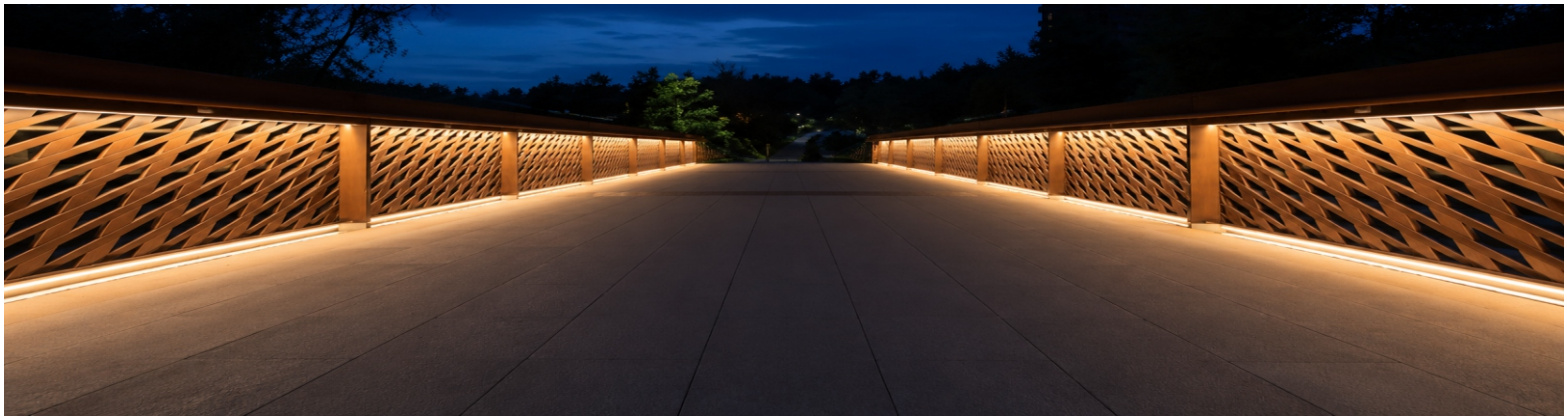

ROUND FACADE LIGHTS

Model	: TK-RD-FSD-6
Power	: 6W
Colour temp	: 3000/4000/6000/
CRI	: >80Ra
Voltage	: 220VAC
Surge Protection	: 2.5KVA
Beam Degree	: 10
Material Aluminum	: Die-cast
Dimension	: 095MM
Wire	: 1ft
IP Grade	: IP65
DLP	: 5200

Model	: TK-RD-FSD-12
Power	: 12W
Colour temp	: 3000/4000/6000/
CRI	: >80Ra
Voltage	: 220VAC
Surge Protection	: 2.5KVA
Beam Degree	: 10
Material Aluminum	: Die-cast
Dimension	: 130X160MM
Wire	: 1ft
IP Grade	: IP65
DLP	: 8300

Model	: TK-RD-FSD-18
Power	: 18W
Colour temp	: 3000/4000/6000/
CRI	: >80Ra
Voltage	: 220VAC
Surge Protection	: 2.5KVA
Beam Degree	: 10
Material Aluminum	: Die-cast
Dimension	: 150X160 MM
Wire	: 1ft
IP Grade	: IP65
DLP	: 9200

Model	: TK-RD-FSD-24
Power	: 24W
Colour temp	: 3000/4000/6000/
CRI	: >80Ra
Voltage	: 220VAC
Surge Protection	: 2.5KVA
Beam Degree	: 10
Material Aluminum	: Die-cast
Dimension	: 180X210 MM
Wire	: 1ft
IP Grade	: IP65
DLP	: 10000

Model	: TK-RD-FSD-36
Power	: 36W
Colour temp	: 3000/4000/6000/
CRI	: >80Ra
Voltage	: 220VAC
Surge Protection	: 2.5KVA
Beam Degree	: 10
Material Aluminum	: Die-cast
Dimension	: 230X270MM
Wire	: 1ft
IP Grade	: IP65
DLP	: 12000

Model	: TK-RD-FSD-48
Power	: 48W
Colour temp	: 3000/4000/6000/
CRI	: >80Ra
Voltage	: 220VAC
Surge Protection	: 2.5KVA
Beam Degree	: 10
Material Aluminum	: Die-cast
Dimension	: 330X330MM
Wire	: 1ft
IP Grade	: IP65
DLP	: 15000

SQUARE FACADE LIGHTS

IP 65

Lense – 3*,10*,24*,45*
Input option – 240vAC, 24VDC

145 x 145 x 180 H

36w - 10d - green led

DLP - 11600

IP 65

Lense – 3*,10*,24*,45*
Input option – 240vAC, 24VDC

200 x 200 x 210 H

48w - 10d - green led

DLP - 16900

LED BEAM LIGHT
Voltage:AC220V
Power:36W
IP rate:IP65
Chip:3535
Size:150x130x155 D
Degree - 5*
Color:3000K,4k,6k,R,G,B,27k
Material: Die cast aluminum

36w - 5degree - green colour led

DLP - 10200

Complete Solution for

SMART LED LIGHTING

LIGHT YOUR MOMENT

A Class of it's own...

teknolite®

LED Lighting

IP65 WATERPROOF IN-GROUND LED LIGHTS

IGL 01
(1x3W)

IGL 02
(3&3x3W)

IGL 03
(6&6x3W)

IGL 05
(12&12x3W)

IGL 06
(10-12W)

IGL 07
(8-10W)

IGL 09
(3&3x3W)

IGL 10
(6&6x3W)

IGL 11
(9&9x3W)

IGL 13
(3W)

IGL 14
(6W)

IGL 15
(12W)

IGL 04
(9&9x3W)

IGL 08
(8-10W)

IGL 12
(12&12x3W)

IP65 WATERPROOF
Dustproof & Water Jet Proof

ENERGY EFFICIENT LED
Low Power High Performance

DURABLE CONSTRUCTION
Die-Cast Aluminium / Stainless Steel Housing

MULTIPLE WATT OPTIONS
3W / 6W / 9W / 12W

BEAM ANGLES
8° / 15° / 24° / 36° / 45°

LONG LIFE
50,000+ HOURS

IDEAL FOR

Pathways | Tree Uplighting | Wall Washers | Building Facades | Driveways | Landscape & Gardens

IP65 WATERPROOF

BUILT TO PERFORM.
DESIGNED TO IMPRESS.

www.teknolite.in

9222229290

A Class of it's own...

teknolite®

LED Lighting

A Class of it's own...

teknolite®

LED Lighting

Teknovision Lighting Pvt. Ltd.

16, Waman Patil Industrial Estate, Chembur, Mumbai - 71 (INDIA)
Phone : +91-22-42188888 / +91 9321229290

www.teknolite.in