
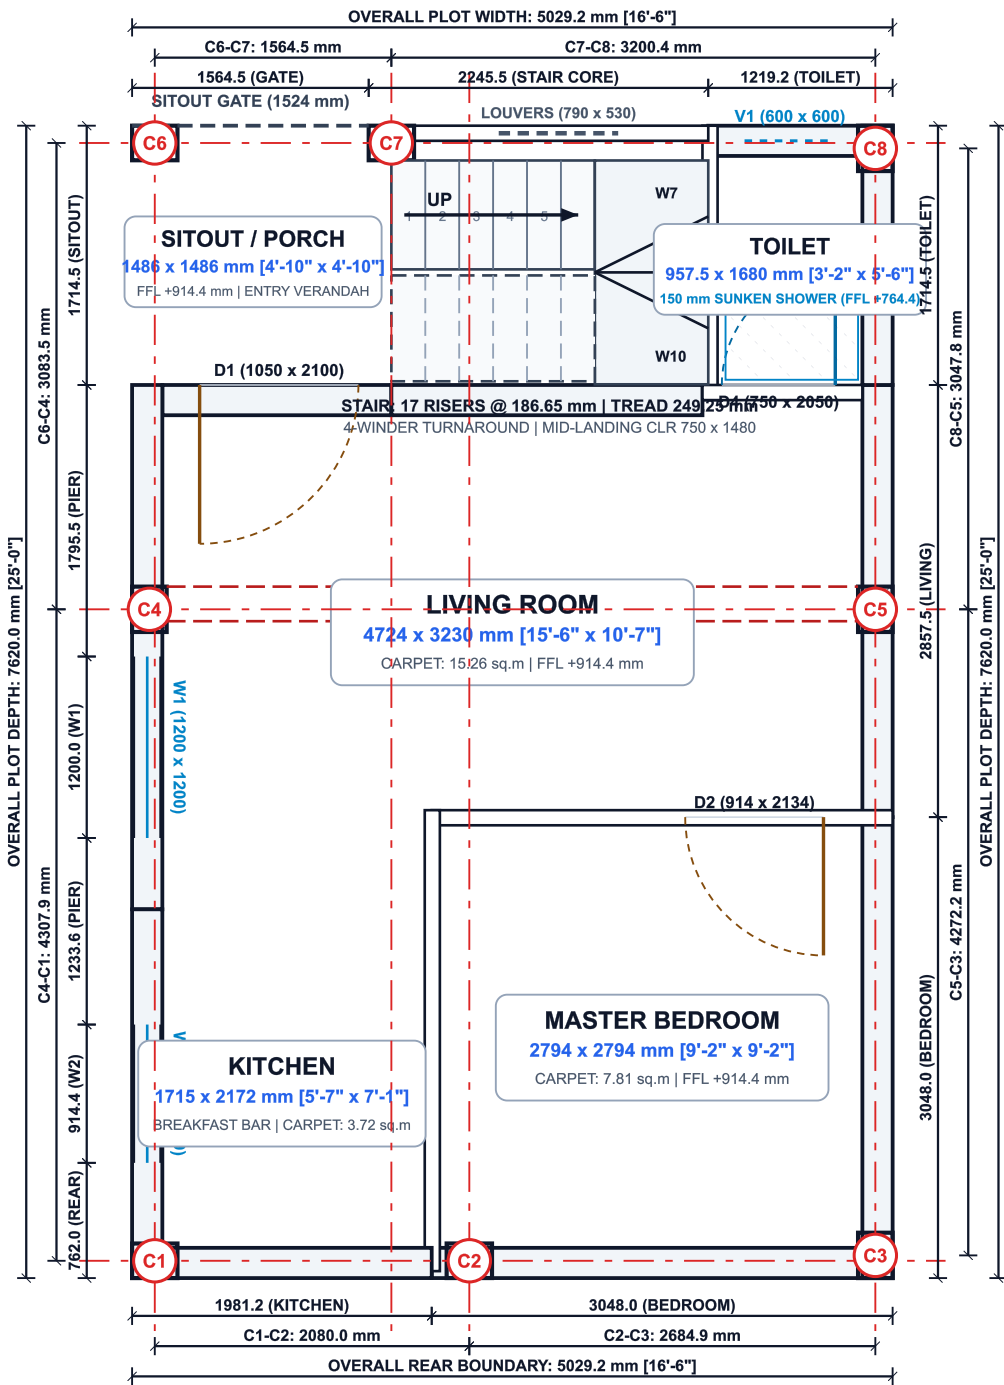


DATUM & LEVEL ELEVATIONS	
ROAD GRADE LEVEL:	+0.0 mm
PLINTH / GF FINISHED FLOOR (FFL):	+914.4 mm [+3'-0"]
TOILET SUNKEN SLAB LEVEL:	+764.4 mm [-150 mm]
LINTEL BAND SOFFIT ELEVATION:	+2133.6 mm [+7'-0"]
ROOF BEAM SOFFIT ELEVATION:	+3662.4 mm [+12'-0"]



DOOR & WINDOW OPENING SCHEDULE			
TAG	TYPE & DESCRIPTION	SIZE (W x H)	SILL / LINTEL
D1	Main Entrance Door (Carved Teak)	1050 x 2100 mm	FFL / +2133.6 mm
D2	Master Bedroom Door (Solid Teak)	914 x 2134 mm	FFL / +2133.6 mm
D4	Toilet Door (Waterproof FRP)	750 x 2050 mm	FFL / +2133.6 mm
W1	Living Hall Window (3-Split UPVC)	1200 x 1200 mm	+900 / +2133.6 mm
W2	Kitchen Window (2-Slide UPVC)	914 x 1219 mm	+900 / +2133.6 mm
V1	Toilet Ventilator (Pinhead Glass)	600 x 600 mm	+1500 / +2133.6 mm
LOUV	Stair Niche Ventilation Louvers	790 x 530 mm	+1500 / +2030 mm

DIMENSION VERIFICATION TABLE (0.0 mm DRIFT)			
MEMBER / SPAN	TARGET	3D SOLID EXTRACT	STATUS
Plot Envelope (W x D)	5029.2 x 7620.0	5029.2 x 7620.0 mm	PASS [0.0mm]
C6-C7 Grid Centerline	1564.5 mm	X: 150.0 -> 1714.5	PASS [0.0mm]
C7-C8 Grid Centerline	3200.4 mm	X: 1714.5 -> 4914.9	PASS [0.0mm]
C4-C1 Grid Centerline	4307.9 mm	Y: 3197.8 -> 7505.7	PASS [0.0mm]
Living Room Clear Span	4724.4 x 3238.0	Inner masonry faces	PASS [0.0mm]
Master Bedroom Clear	2794.1 x 2794.1	Inner masonry faces	PASS [0.0mm]
Kitchen Clear Area	1714.5 x 2171.7	Inner masonry faces	PASS [0.0mm]
Toilet Wet / Dry Floor	150 mm drop	Sunken Z=764.4 / Dry 914.4	PASS [0.0mm]
Main Door Wall (Grid B)	200.0 mm (8")	Y: 1714.5 -> 1914.5	PASS [0.0mm]

GENERAL ARCHITECTURAL & STRUCTURAL NOTES	
1. ALL DIMENSIONS ARE IN MILLIMETRES (mm) UNLESS NOTED OTHERWISE.	
2. DO NOT SCALE WRITTEN DRAWING; FOLLOW FIGURED DIMENSIONS ONLY.	
3. RCC STRUCTURAL MEMBERS CONFORM TO IS 456:2000 (M25 CONCRETE, Fe500 TMT).	
4. EXTERIOR WALLS: 200 mm (8") AAC MASONRY WITH EXTERIOR BOUNDARY ALIGNMENT.	
5. INTERIOR PARTITIONS: 100 mm (4") AAC BLOCK WALLS WITH MORTAR BANDAGE.	
6. LIVING_ROOM_WALL_MAIN_DOOR & WALL_STAIR_SE_SW REFLECT UPDATED 200 mm SECTIONS.	
7. 150 mm SUNKEN SLAB IN TOILET COATED WITH HIGH-GRADE ELASTOMERIC WATERPROOFING.	
8. CONTINUOUS RCC LINTEL & SILL BANDS CONFORM STRICTLY TO IS 4326 EARTHQUAKE CODE.	
9. PRIMARY TRANSFER CROSS-BEAM RB_LIVING_PRIMARY (230x350 M25) SPANS C4 TO C5.	
10. 17-RISER DOG-LEGGED STAIRCASE FULLY COMPLIES WITH NBC 2016 CLAUSE 4.4.2.	

RESIDENTIAL G+1 BUILDING PROJECT	
SINGLE SOURCE OF TRUTH: HomeConstruction.FCStd	
DRAWING SHEET TITLE	
GROUND FLOOR ARCHITECTURAL PLAN	
SECTION CUT AT Z = +2100.0 mm (LOOKING -Z DOWNWARD)	
PROJECT STAGE:	CONSTRUCTION ISSUE
SCALE:	1 : 50 @ ISO A3
DRAWING NO:	Page_Ground_Floor_Plan
SHEET NUMBER:	SHEET 02 OF 12
REVISION:	REV R0 (FINAL RELEASE)
DATE OF ISSUE:	2026-09-14
DRAWN BY:	Antigravity BIM Engine
CHECKED BY:	Principal Structural Architect
CAD SYSTEM:	FreeCAD 1.1.3 TechDraw
TOLERANCE DRIFT:	0.0 mm (CAD MATCHED)
✓ TECHDRAW 2D SHEET CERTIFICATION: PASSED	
100% Geometry Matched to 3D Solids in HomeConstruction.FCStd	
NBC 2016 Part 3 & IS 456 / IS 4326 Compliant Detailing	
ISSUED FOR SITE CONSTRUCTION & CONTRACTOR REVIEW	