

AMENDMENT NO. 4 FEBRUARY 2026
TO
IS 15796 : 2008 AUTOMOTIVE VEHICLES AND AGRICULTURAL
TRACTORS — HORN INSTALLATION REQUIREMENTS

(Page 1, clause 2) — Substitute the following for the existing:

‘2 REFERENCES

The standards given below contain provisions, which through reference in this text constitute provisions of the standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent edition of these standards:

<i>IS No.</i>	<i>Title</i>
IS 1884 : 1993	Automotive vehicles — Electric horns — Specification (<i>third revision</i>)
IS 15575	Electroacoustics — Sound level meters:
(Part 1) : 2016/ ISO 61672-1 : 2013	Specifications (<i>first revision</i>)
(Part 2) : 2023/ISO 61672-2 : 2017	Pattern evaluation tests (<i>second revision</i>)’

(Page 1, clause 6.2.1) — Substitute the following for the existing:

‘6.2.1 The measurement of the sound pressure levels shall be made using a sound level meter in accordance with IS 15575-1 and IS 15575-2 for and using the weighting curve-A.’

[Page 1, clause 6.2.2 (see also Amendment No. 2)] — Substitute the following for the existing:

‘6.2.2 The sound signalling device shall be operated at test voltages of 6.5 V, 13 V, 26 V, 52 V with tolerance of ± 0.5 V, measured at the terminals of the source and corresponding respectively to rated voltage of 6 V, 12 V, 24 V, 48 V. A calibrated power supply may be used for operating the sound signalling device.

NOTE — In case of battery-operated vehicles (BOV), alternatively vehicle rated voltage can be considered as test voltage based on the recommendation of the OEM.’

(Page 2, clause 6.2.4) — Substitute the following for existing:

‘6.2.4 The A-weighted sound pressure level emitted by the horn fitted on the vehicle shall be measured at a distance of 7.00 m $\pm$ 0.10 m in front of the vehicle, which is being placed on an open site (see Fig. 1), on flat concrete or asphalt surface.

In case of horn supplied with direct current, the test voltage shall be supplied by either:

- a) The vehicle battery only; or
- b) The vehicle battery with the vehicle engine warmed-up and at idle; or
- c) With an external power source supply connected to the horn.’

Price Group 1

Amendment No. 4 to IS 15796 : 2008

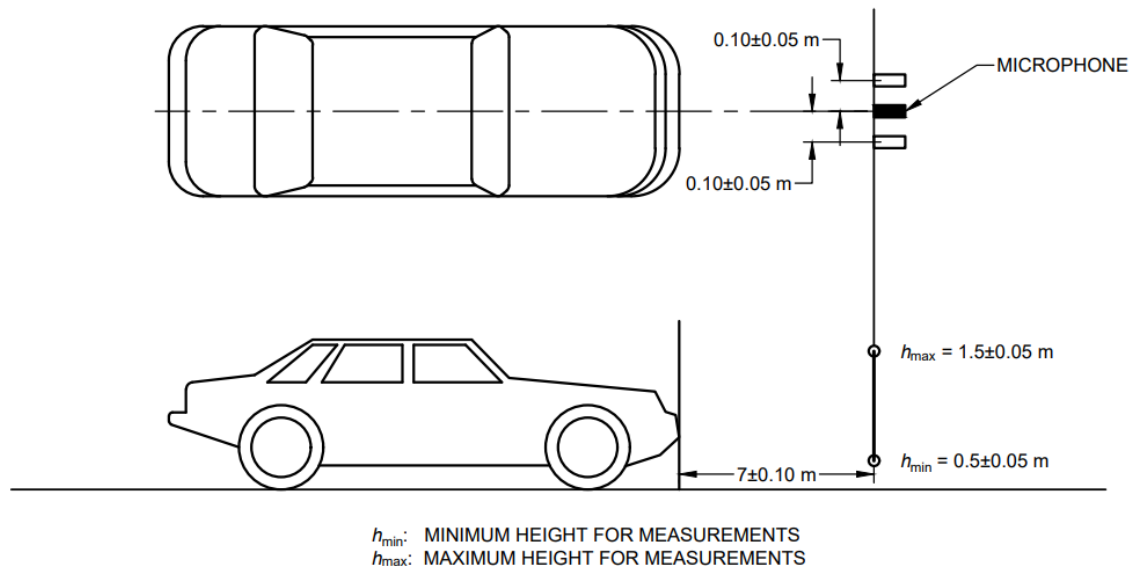


FIG. 1 MICROPHONE POSITIONS FOR MEASUREMENTS OF HORN SOUND PRESSURE LEVEL OF MOTOR VEHICLES'

(Page 2, clause **6.2.5**) — Substitute the following for the existing:

'**6.2.5** The microphone of the measuring instrument shall be placed approximately ($\pm 0.10 \text{ m}$) in the mean longitudinal plane of the vehicle.'