

AMENDMENT NO. 1 MAY 2005
TO
IS 13568 : 1992 LEAD ACID LIGHT WEIGHT STORAGE BATTERIES
FOR MOTOR CYCLES AND SIMILAR VEHICLES FITTED WITH AC CIRCUITRY —
SPECIFICATION

(Page 1, clause 4.6, line 2) — Substitute 'IS 266 : 1993' for 'IS 266 : 1977'.

(Page 2, clause 4.8, line 2) — Substitute 'IS 1069 : 1993' for 'IS 1069 : 1964'.

(Page 3, Table 1) — Add few more types under column heading **Classification** 'High performance' given on page 2.

(Page 4, clauses 7.1.2.1, 7.2 and 7.8) — Substitute 'IS 8320 : 2000' for 'IS 8320 : 1982'.

(Page 4, clause 7.2) — Add the following note below the clause:

*NOTE — Digital/Analog meters may be used.'

(Page 4, clause 7.9.4, formula) — Substitute ' C_t ' for ' C_2 '.

(Page 5, clause 7.10, line 3) — Substitute 'of' for 'or'.

(Page 5, clause 7.11.2, Note, line 3) — Substitute 'manufacturer' for 'maunfacturer'.

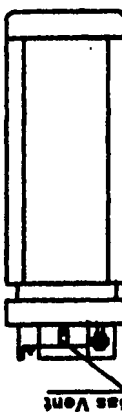
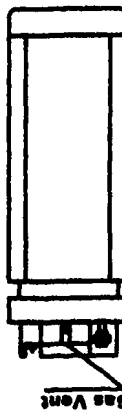
(Page 6, clause 7.13.4, line 3) — Substitute ' $I = 0.1 \times C_{10} A$ ' for ' $I = 0.1 C_{10}$ '.

(Page 6, Annex A) — Substitute 'IS 266 : 1993' for 'IS 266 : 1977'.

(Page 6, Annex A) — Substitute 'IS 1069 : 1993' for 'IS 1069 : 1964'.

(Page 6, Annex A) — Substitute 'IS 8320 : 2000' for 'IS 8320 : 1982'.

Amend No. 1 to IS 13568 : 1992

	TYPE	voltage	AhCap-??p 10 HOUR rate	MAXIMUM Dimension L X W X H	Layout of gas vent and Terminals	Position of gas vent	Characteristics				Approximate Weight with Electrolyte In Kg
							HRD - 10°C	5 v	Y min	Life Cycle	
High Performance	YB14L-A2	12	1x	136x91x168			110	9.3	1.5	300	4.8
	12N14-13A	12	14	136x91x169			100	8.5	1.5	300	4.8
	YB4L-B	12	4	122x72x94			25	9.3	1.5	375	1.7
	YB7-A	12	1x	137x77x135			60	9.5	1.5	300	3.2
	YB9-8	12	9	137x77x141			70	9.3	1.5	350	3.6