

AMENDMENT NO. 3 JANUARY 1984
TO
IS : 4571-1977 SPECIFICATION FOR
ALUMINIUM EXTENSION LADDERS FOR
FIRE BRIGADE USE

(First Revision)

Alterations

(*Page 4, clause 3.1*) — Substitute the following for the existing clause:

‘3.1 The aluminium alloy section for stiles or strings shall conform to aluminium alloy 64430 WP or 65032 WP of IS : 733-1975† and IS : 1285-1975†’.

[*Page 4, clause 3.2, (see also Amendment No. 2)*] — Substitute the following for the existing clause:


‘3.2 The aluminium alloy section used for the rounds of the ladder shall conform to aluminium alloy 64430 WP or 65032 WP of IS : 733-1975† and IS : 1285-1975†.’

(*Page 4, clause 3.3, line 2*) — Substitute ‘4600’ for ‘A-6’.

[*Page 4, clause 4.1 and Fig. 1 (see also Amendment No. 1)*] — Substitute the following for the existing clause and figure:

‘4.1 Extension ladders when fully extended shall meet the required sizes of 4.5, 7.5 and 10.5 m and overlap as shown in Fig. 1; when closed the distance between the same extremities of top and bottom sliding ladder shall not exceed 750 mm.’

(*Page 4, foot-note with ‘*’ mark*) — Delete.

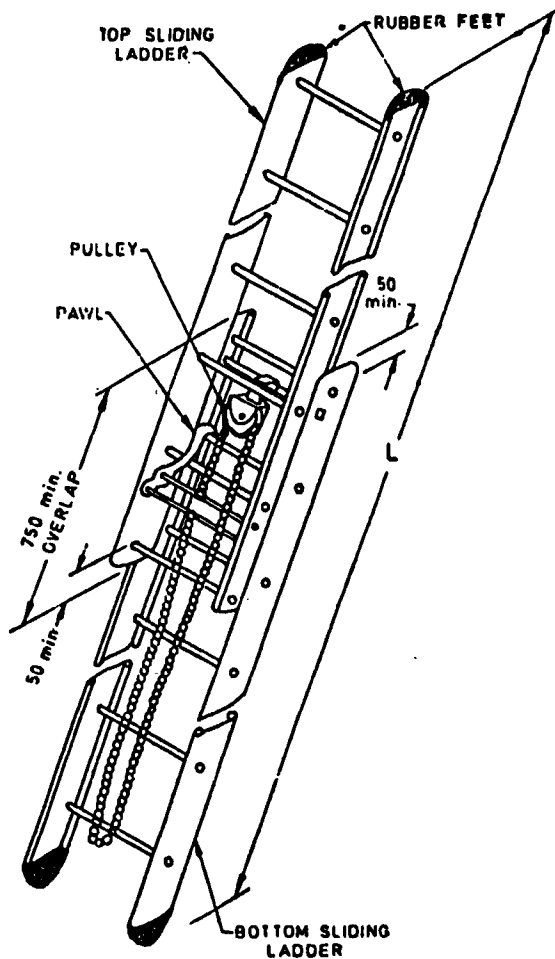

L Means Extended Length of Ladder

All dimensions in millimetres.

FIG. 1 TYPICAL SKETCH OF EXTENSION LADDER

(BD 22)