

AMENDMENT NO. 1 MAY 2026

TO

IS 17740 : 2022 ISOLATED TOWERS, MASTS AND POLES USING STRUCTURAL STEEL — CODE OF PRACTICE

(Page 1, clause 1.5) — Insert the following at the end:

‘1.6 As a minimum, existing structures shall be evaluated in accordance with this standard, regardless of the standard used for the design of the original structure or the last modification, under any of the following changed conditions:

- a) A significant change in type, size, or number of appurtenances such as antennas, radios, transmission lines, mounts, platforms, ladders etc;
- b) A change in the risk category of a structure to a higher risk category;
- c) A change in serviceability requirements (that is, more stringent twist or sway limitations due to a change involving microwave antennas); and
- d) A change to the geometry of the structure or to the strength of structural components (that is, an extension in height of the structure, a change in guying configuration of a guyed mast or a change to structural members resulting in lower strength, etc).

NOTES

- 1 Existing structures need not be re-analysed for each revision of this standard unless there are changed conditions as outlined above.
- 2 The appurtenance change shall be considered significant when strength requirements increase by more than 5 percent for any structural components, in which case the required modification and/or final acceptance shall be determined in accordance with this standard.’

(Page 8, clause 7.3.1, Note) — ‘Delete’.

(Page 10, Fig. 3, title) — Substitute ‘3 AND 4 STAYED MASTS’ for ‘4 STAYED CIRCULAR MAST SIMILAR’.

[Page 14, clause 8.4(c)] — Substitute the following value of (C_g) for the existing:

‘ $C_g = 176.5$ [8.70]’ for ‘ $C_g = 14.66$ ’.

(Page 19, Table 2, Note 4) — Insert the following at the end:

‘5 Towers and masts shall be designed so that their design strength equals or exceeds the load effects of the factored loads in each of the following limit state combinations:

- a) $1.1 DL + 1.0 D_g + 1.4 W_0$;
- b) $0.9 DL + 1.0 D_g + 1.4 W_0$;
- c) $1.1 DL + 1.0 D_g + 1.0 D_i + 1.0 W_i + 1.0 T_i$;
- d) $1.1 DL + 1.0 D_g + 1.0 E$; and
- e) $0.9 DL + 1.0 D_g + 1.0 E$;

where

DL = dead load of structure and appurtenances, excluding guy assemblies;
 D_g = dead load of guy assemblies;
 D_i = weight of ice due to factored ice thickness;
 E = earthquake load;
 T_i = load effects due to temperature;
 W_0 = wind load without ice; and
 W_i = concurrent wind load with factored ice thickness.’

Amendment No. 1 to IS 17740 : 2022

(Page 25, clause 15.2.5) — Insert the following at the end:

‘15.2.6 For tubular round members, the diameter to thickness ratio (D_o/t) shall not exceed 300’.

15.2.7 For polygonal members, w/t shall not exceed $2.14 \left(\sqrt{\frac{E}{F_y}} \right)$.


15.2.8 Polygonal members with more than 18 sides, shall be considered as round members for strength investigation purposes using a diameter equal to distance across flats.

15.2.9 While designing the pole structure, the D_o/t ratio and w/t ratio, shall be maintained properly to avoid buckling and ovality of the individual sections of the pole structure under load during transportation and handling.


where

- D_o = outside diameter of section;
- w = width of side; and
- t = thickness of sheet.’

(Page 35, Annex D, second row, first Fig.) — Substitute the following for the existing:

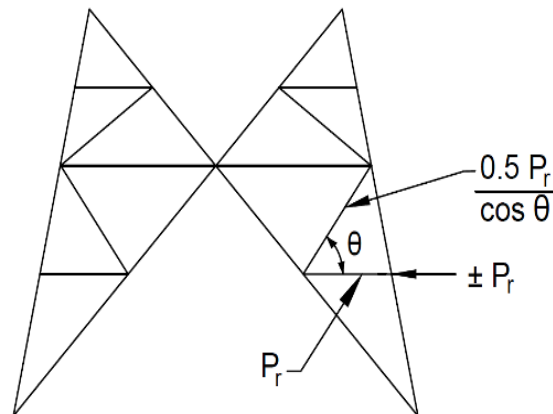


(Page 39, Annex E, clause E-3, third row, Fig.) — Substitute the following for the existing:

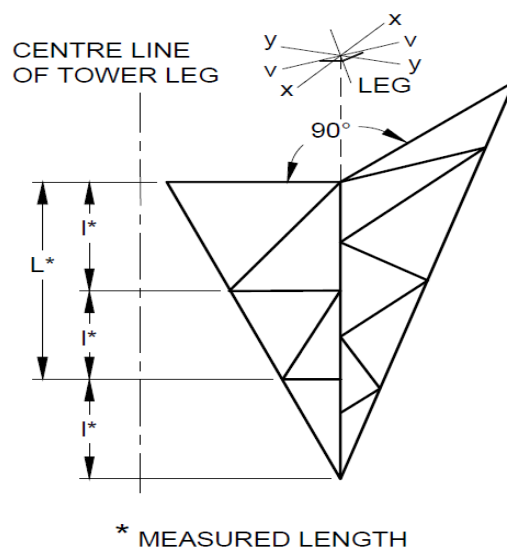

(Page 40, Table 5, Note) — Substitute ‘120’ for ‘150’.

Amendment No. 1 to IS 17740 : 2022

(Page 42, Annex F, clause F-1, fourth row, Fig. and ratios) — Substitute the following for the existing:

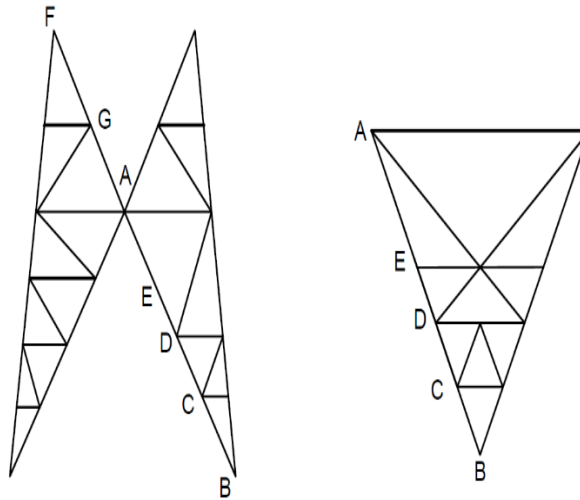

$$\begin{aligned} &AG/r_{vv} \text{ or } *AF/r_{xx} \\ &\text{or } AD/r_{xx} \text{ or } *AE/r_{vv} \\ &\text{or } DC/r_{vv} \text{ or } *CB/r_{vv} \end{aligned}$$

In the above figure, 'E' is the mid node between A and D.

[Page 48, Table 6, Note 7(a)] — Substitute the following for the existing.

'a) Main leg members = 120'.