

AMENDMENT NO. 1 MARCH 2026

TO

**IS 18258 : 2023 EVALUATION OF TYRES WITH REGARD TO
ROLLING SOUND EMISSIONS AND/OR TO ADHESION ON WET SURFACES
AND/OR TO ROLLING RESISTANCE**

(Foreword, para 2) — Substitute the following for the existing:

‘In recent years, environment has become a prime focus and rolling resistance is directly related to fuel efficiency and hence the CO₂ emissions. This standard specifies the various test methods to evaluate the tyre with respect to rolling resistance, its performance on wet surface and rolling sound emission.’

(Page 6, clause 6.3) — Substitute the following for the existing:

‘6.3 Rolling resistance coefficient limits, as measured by the method described in Annex E.

6.3.1 The maximum values for stage 1 for the rolling resistance coefficient shall not exceed the following (value in N/kN is equivalent to value in kg/t):

<i>Tyre Class</i>	<i>Max Value (N/kN)</i>
C1	13.5 (for radial tyres < 14 inch) 12.0 (for radial tyres ≥ 14 inch)
C2	12.0 (for radial tyres ≤ 14 inch) 11.5 (for radial tyres > 14 inch) 13.5 (for bias tyres ≤ 14 inch) 13.0 (for bias tyres > 14 inch)
C3	8.5 (for radial tyres) 10.0 (for bias tyres)

NOTE — For ‘snow tyre for use in severe snow conditions’, the limits shall be increased by 1 N/kN.

6.3.2 The maximum values for stage 2 for the rolling resistance coefficient shall not exceed the following (value in N/kN is equivalent to value in kg/t):

<i>Tyre Class</i>	<i>Max Value (N/kN)</i>
C1	13.5 (10 inch ≤ for radial tyres < 14 inch) 12.0 (14 inch ≤ for radial tyres ≤ 25 inch)
C2	12.0 (10 inch ≤ for radial tyres < 14 inch) 11.5 (14 inch ≤ for radial tyres ≤ 25 inch) 13.5 (10 inch ≤ for bias tyres < 14 inch) 13.0 (14 inch < for bias tyres ≤ 25 inch)
C3	8.5 (10 inch ≤ for radial tyres ≤ 25 inch) 10.0 (10 inch ≤ for bias tyres ≤ 25 inch)

NOTE — For ‘snow tyre for use in severe snow conditions’, the limits shall be increased by 1 N/kN.

Price Group 1

6.3.3 The maximum values for stage 3 for the rolling resistance coefficient shall not exceed the following (value in N/kN is equivalent to value in kg/t):

<i>Tyre Class</i>	<i>Max Value (N/kN)</i>
C1	12 (for tyres < 14 inch) 10.5 (for tyres ≥ 14 inch)
C2	11.0 (for radial tyres ≤ 14 inch) 10.5 (for radial tyres > 14 inch) 12.5 (for bias tyres ≤ 14 inch) 12.0 (for bias tyres > 14 inch)
C3	7.0 (for radial tyres) 9.5 (for bias tyres)

NOTE — For 'snow tyre for use in severe snow conditions', the limits shall be increased by 1 N/kN.'

(Page 14, clause **B-5.2**, formula for 'a') — Substitute the following for the existing:

$$c \frac{\sum_{i=1}^n (v_i - \bar{v})(L_i - L)}{\sum_{i=1}^n (v_i - \bar{v})^2},$$

(Page 23, clause **D-1.2.3**) — Substitute the following for the existing:

D-1.2.3 Atmospheric Conditions

The wind conditions shall not interfere with wetting of surface (wind-shields are allowed). The wetted surface temperature and the ambient temperature shall be between:

<i>Category of use</i>	<i>Wetted Surface Temperature</i>	<i>Ambient Temperature</i>
Normal tyres	12 °C to 35 °C	12 °C to 40 °C
Snow tyres	5 °C to 35 °C	5 °C to 40 °C
Snow tyres for use in severe snow conditions	5 °C to 20 °C	5 °C to 20 °C
Special use tyres	Not applicable	Not applicable

Moreover, the wetted surface temperature shall not vary during the test by more than 10 °C.

The ambient temperature shall remain close to 'the wetted surface' temperature, the difference between the ambient and wetted surface temperature shall be less than 10 °C.'

(Page 37, Fig. 4) — Substitute the following for the existing:

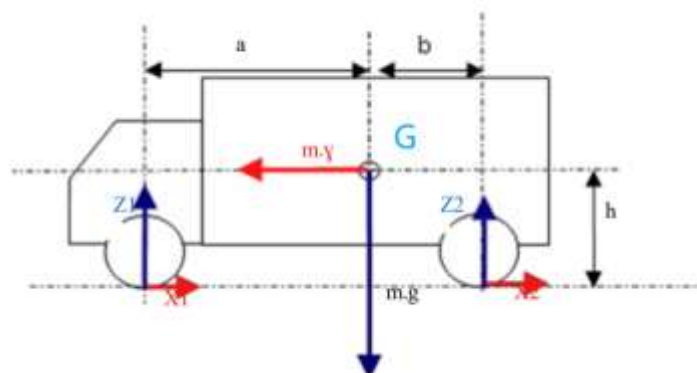


FIG. 4 NOMENCLATURE EXPLANATION RELATED TO GRIP INDEX OF THE TYRE