

AMENDMENT NO. 2 JANUARY 2026
TO
IS 18482 : 2023 TEXTILES — SANDWICH EXTRUSION
LAMINATED POLYPROPYLENE (PP) WOVEN SACKS FOR
PACKAGING BULK COMMODITIES — SPECIFICATION

(Page 1, clause 3.13) — Substitute the following for the existing:

‘3.13 Pinch Bottom Sacks — Gusseted sack, sealed with glue at bottom and/or top. These sacks when filled, form brick like shape and hence, can be stacked to higher heights. As these sacks does not involve stitching and thus not susceptible to pilfering.’

(Page 3, clause 5.3.1.1.3) — Substitute the following for the existing:

‘5.3.1.1.3 The total mass of BOPP film laminated woven fabric shall be minimum 77 GSM for sacks of Type I and Type II; shall be minimum 92 GSM for sacks of Type III, Type IV and Type V; and shall be minimum 107 GSM for sacks of Type VI and Type VII.’

(Page 3, clause 5.3.1.2.3) — Substitute the following for the existing:

‘5.3.1.2.3 The total mass of nonwoven laminated woven fabric shall be minimum 85 GSM for sacks of Type I and Type II; shall be minimum 100 GSM for sacks of Type III, Type IV and Type V; and shall be minimum 115 GSM for sacks of Type VI and Type VII.’


(Page 3, clause 5.3.3, second sentence) — Substitute the following for the existing:

‘5.3.3 The extrusion lamination overhang at both edges shall be trimmed uniformly and the overhang shall be minimum 5 mm and not be more than 15 mm after trimming.’

(Page 4, clause 5.4.3, third sentence) — Substitute the following for the existing:

‘5.4.3 If agreed between the buyer and the seller, D-cut handles (*see* Fig. 3) or plastic moulded handles may be provided. In the case of D-cut handles, the cut shall be made at the centre of the bag, with a vertical opening of 0.5 inch × 4 inches, positioned 3 inches below the top edge of the bag.’

(Page 4, clause 5.4.3) — Insert the following new figure after Fig. 2:

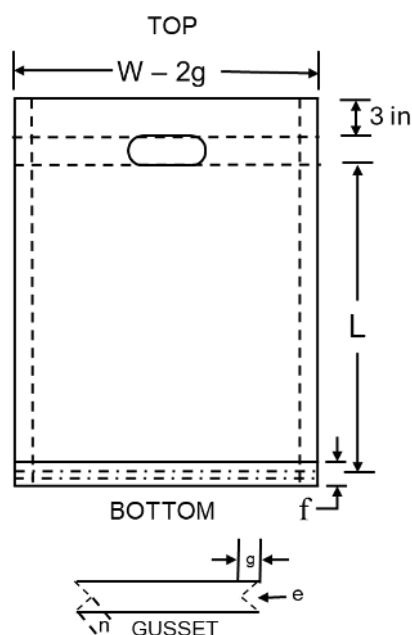

Amendment No. 2 to IS 18482 : 2023

Key

- L* - sack length (bottom seam to top closure point);
W - sack width;
e - gusset;
g - half of gusset width;
n - overlap width for centre seam;
f - bottom fold length; and
dotted line over bottom fold '*f*' indicate bottom seam.

FIG. 3 DIMENSIONAL DESIGNATION OF TYPE I AND TYPE II GUSSETED SACKS WITH D-CUT HANDLE'

(Page 8, clause 8.3) — Substitute the following for the existing:

'**8.3** The number of samples to be selected depends on the size of lot and the number of bales to be sampled, shall be in accordance with col (2) and col (3) of Table 3. The number of sacks to be selected from the bales sampled shall be in accordance with col (4) of Table 3 for visual inspection, warp and weft per decimetre, fabric mass, sack mass and sack dimensions requirements and col (5) of Table 3 for breaking strength of fabric, seam strength and elongation at break requirements. The samples shall be selected in accordance with col (6) of Table 3 for determination of drop impact strength and ash content. If applicable, the samples shall also be selected in accordance with col (6) of Table 3 for determination of breaking strength of fabric after UV radiation and weathering test.'

[Page 10, Annex A] — Substitute the following for the existing:

'ANNEX A

(Clause 2)

LIST OF REFERRED STANDARDS

<i>IS No.</i>	<i>Title</i>
IS 1964 : 2025	Textiles — Mass per unit length and Mass per unit area of fabrics — Methods of test (<i>third revision</i>)
IS 1969 (Part 1) : 2018/ISO 13934-1 : 2013	Textiles — Tensile properties of fabrics: Part 1 Determination of maximum force and elongation at maximum force using the strip method (<i>fourth revision</i>)
IS 2508 : 2024	Polyethylene films and sheets — Specification (<i>fourth revision</i>)
IS 6192 : 2023	Textiles — Monoaxially oriented high density polyethylene HDPE and polypropylene PP tapes — Specification (<i>third revision</i>)
IS 6359 : 2023	Method for conditioning of textiles (<i>first revision</i>)
IS 9030 : 2024	Textiles — Seam strength of jute fabrics including their laminates — Methods of test (<i>first revision</i>)
IS 10146 : 1982	Specification of polyethylene for its safe use in contact to foodstuffs, pharmaceuticals and drinking water
IS 10789 : 2000/ ISO 4915 : 1991	Textiles — Stitch types — Classification and terminology (<i>first revision</i>)
IS 10910 : 1984	Specification for polypropylene and its copolymers for its safe use in contact with foodstuffs, pharmaceuticals and drinking water
IS 14534 : 2023	Plastics — Recovery and recycling of plastics waste — Guidelines (<i>second revision</i>)'

(Page 12, Annex C) — Substitute the following for the existing:

‘ANNEX C

[Clauses 5.2.2, 6.1.2 and (Note 4, Table 1)]

METHOD FOR CALCULATION OF MASS OF SACK

C-1 Total mass of gusseted sacks with bottom stitch comprises of:

- a) mass of fabric;
- b) mass of lamination;
- c) mass of liner (if applicable);
- d) mass of stitching thread;
- e) mass of handle (based on design and material); and
- f) mass of printed ink (as per the artwork).

C-2 Calculate the mass of sack (M) with the help of the following formula as the case may be:

- a) Mass of fabric

$$\text{Mass of tubular fabric (single-fold stitching)} = (L + f) \times [2W + n] \times m \times 10^{-6}$$

- b) Mass of lamination

$$\text{Single fold stitching} = (L + f) \times 2 (W + 5) \times m_l \times 10^{-6}$$

- c) Mass of liner (if applicable)

$$\text{Single fold stitching} = (L + 100) \times [2(W + 100)] \times t \times \rho \times 10^{-6}$$

- d) Mass of stitching tape or thread

$$M_t = (L_t \times T) \times 10^{-6}$$

where

M	=	mass, in g, of sack;
L	=	length, in mm, of sack (measured for bottom stitch to top);
f	=	fold length, in mm;
W	=	width, in mm, of sack (with open gusset);
t	=	thickness of liner in micron;
ρ	=	density of liner material in g/cm ³ ;
n	=	overlap width, in mm, (applicable for tube fabricated from flat fabric with centre seam);
m	=	mass, in (g/m ²), of fabric;
m_l	=	mass, in (g/m ²), of lamination;
M_t	=	mass, in g, of stitching thread;
L_t	=	length, in mm, of stitching thread (for centre stitch and bottom stitch as applicable); and
T	=	linear density, in tex, of stitching thread.

NOTES

1 Bottom fold length (f) shall be taken for calculation as 35 mm for double row stitch; 19 mm for single row stitch; 13 mm for double row pinch weld seam and 8 mm for single row pinch weld seam. The pinch weld seam does not require bottom folding.

2 For bottom gusseted bags, the bottom fold length (f) shall be taken as $\frac{3}{4}$ of gusset width.

3 For block bottom bags, the bottom fold length (f) shall be taken as equal to the gusset width.’