

AMENDMENT NO. 1 MARCH 1981
TO
IS : 1362 - 1975 SPECIFICATION FOR STUDS
(Second Revision)

Alterations

(Page 1, clause 3) — Substitute the following for the existing clause:

'3. Types — Three types as follows:

Type A — $b_1 \approx 1 d$, suitable for use in steel.

Type B — $b_1 \approx 1.5 d$, suitable for use in cast iron.

Type C — $b_1 \approx 2 d$, suitable for use in aluminium alloys.


Note — For values of b_1 , see Tables 1 and 2.

(Page 1, clause 4) — Substitute the following for the existing clause:

"4. Grade — Grade A as specified in IS : 1367 (Part II)-1979 ' Technical supply conditions for threaded steel fasteners: Part II Product grades and tolerances (second revision) '.

(Page 2, Table 1):

a) *Figure* — Substitute the following for the existing figure:

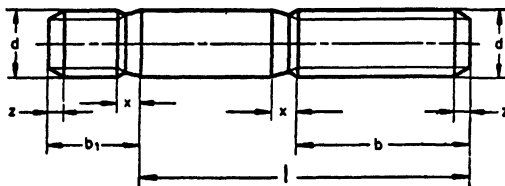

z according to IS : 1368-1967 ' Dimensions of ends of bolts and screws (first revision) '.

x according to IS : 1369-1975 ' Dimensions of screw thread runouts and undercuts (first revision) '.

Note — Machined threads and rounded end at nut end also permitted.

b) *Tenth Column, last three entries* — Substitute the following for the existing entries:

20


20.65

19.35

c) *Foot-note with '*' mark* — Delete.

(Page 2, Table 2):

a) *Figure* — Substitute the following for the existing figure:

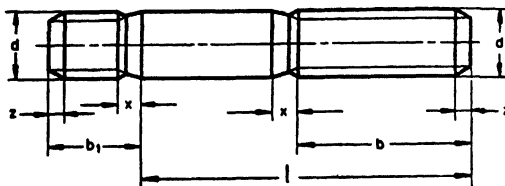

z according to IS : 1368-1967 ' Dimensions of ends of bolts and screws (first revision) '.

x according to IS : 1369-1975 ' Dimensions of screw thread run-outs and undercuts (first revision) '.

Note — Machined threads and rounded end at nut end also permitted.

b) *Foot-note with '*' mark* — Delete.

(Page 3, Table 4) — Substitute the following for the existing table:

TABLE 4 PREFERRED LENGTH-SIZE COMBINATIONS FOR TYPE C STUDS

(Clause 5.4)

All dimensions in millimetres.

l	M4	M8 M8 x1	M10 M10 x1.25	M12 M12 x1.25	M16 M16 x1.5	M20 M20 x1.5
25						
30						
40						
60						
80						
100						
120						
140						
160						
200						

Note 1 — Preferred lengths are between the stepped bold lines.

Note 2 — See Fig. 2 and 3 for tolerances on length *l*.

Addenda

(Page 1, clause 5.5) — Add the following new sentence at the end of the clause:

"Screw threads for nut end of the stud shall conform to 6 g tolerance class as specified in IS : 4218-1976 ' ISO metric screw threads '."

(Page 3, Table 3, Note 3) — Add the following new Note after Note 3:

Note 4 — For studs above the stepped bold line, thread length, $b \approx l - (x + 3)$.'