

AMENDMENT NO. 1 MARCH 1972
TO
IS : 1961-1968 SPECIFICATION FOR
GLASS TABLEWARE
(First Revision)

With a view to describing the water sprayer used for testing thermal shock resistance of flat tableware in detail, the Glassware Sectional Committee, responsible for the preparation of the standard, decided to issue this amendment.

Alteration

(Page 6, clause A-1.1.2) — Substitute the following for the existing clause:

A-1.1.2 Water Sprayer — The sprayer shall be of the size and shape as shown in Fig. 1. The spraying face shall have 30 to 35 holes of 0.5 mm diameter. These holes shall be at a distance of about 10 mm from one another. Water shall be maintained at a pressure of 1 kgf/cm² by means of a valve and the spraying surface shall be kept at a distance of 30 cm from the ware under test.

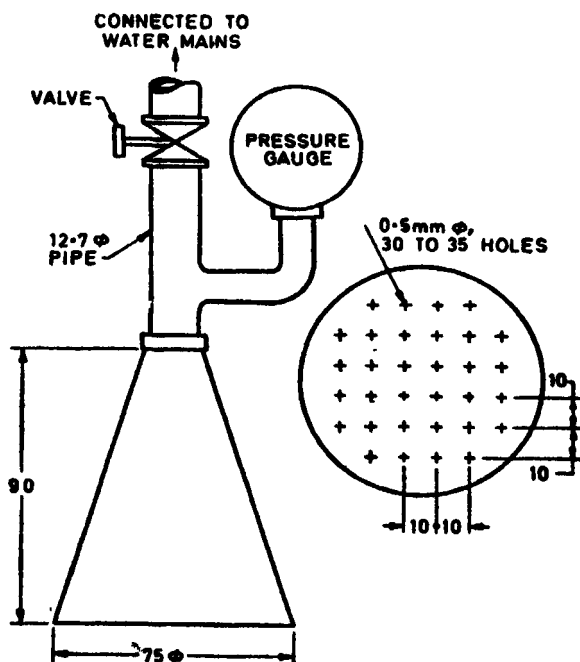


FIG. 1 WATER SPRAYER

(CDC 10)