

AMENDMENT NO. 3 JANUARY 1992

TO

IS 2325 : 1981 SPECIFICATION FOR IGNITION COILS FOR BATTERY-COIL IGNITION SYSTEMS FOR AUTOMOBILES

(First Revision)

(Page 4, clause 1.1) — Substitute the following for the existing clause:

'1.1 This standard covers the basic mechanical and electrical requirements, methods of test and mounting dimensions for 6 V, 12 V and 24 V for use with automotives using contact breaker ignition systems with battery as source.'

(Page 4, clause 1.2) — Substitute the following for the existing clause:

'1.2 This standard does not cover the following types:

- a) Vibration, and
- b) Electronic ignition.'


[Page 10, clause 7.5.1 (b) (i), (ii) and (iii)] — Substitute the following for the existing matter:

'7.5.1 b) Lead Resistance

For performance testing a total of 20 000 ohms may be included in between coil and distributor as shown in Fig. 3.'

(Page 11, Fig. 3A) — Substitute the following for the existing figure:

(CTED 11)

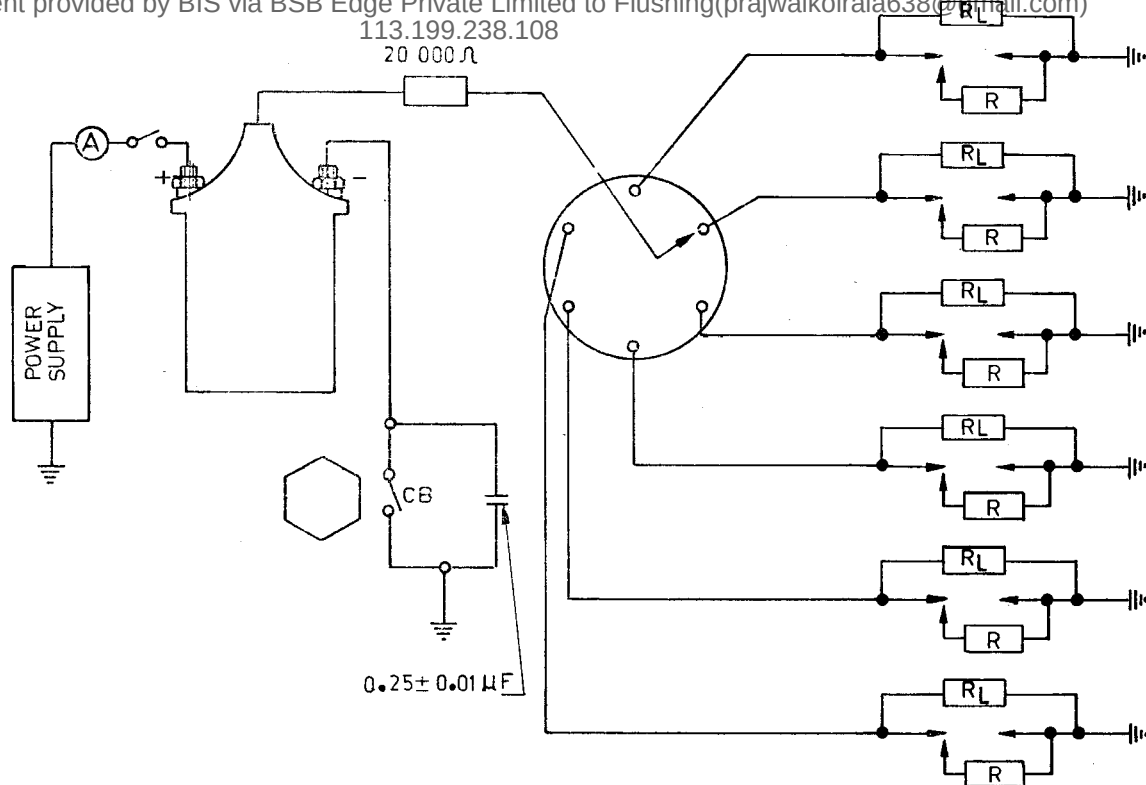

NOTE 1 — Contact breaker close period shall be set to:

- $39 \pm 0.5^\circ$ for 6 lobe cam
- $57 \pm 0.5^\circ$ for 4 lobe cam

NOTE 2 — Power supply shall be as specified in the relevant clause.

NOTE 3 — The coil shall be held in the vertical position with the terminals upwards.

NOTE 4 — 4 or 6 lobe cam of associated distributor shall be used for the test.

3A Schematic Diagram of Test Set-Up

FIG. 3 PERFORMANCE TEST — Contd