

**AMENDMENT NO. 1 JANUARY 2014
TO
IS 15139 : 2002 AUTOMOTIVE VEHICLES — SAFETY
BELT ANCHORAGES — SPECIFICATION**

(Page 3, clause **4.4.2.1**, line 2) — Substitute ' α_1 and α_2 ' for ' a_1 and a_2 '.

(Page 3, clause **4.4.2.2**, line 6) — Substitute ' α_1 and α_2 ' for ' a_1 and a_2 '.

(Page 3, clause **4.4.2.2**, line 11) — Substitute ' α_1 ' for ' a_1 '.

(Page 5, clause **4.4.2.3**, line 1) — Substitute ' α_1 and α_2 ' for ' a_1 and a_2 '.

(Page 5, clause **4.4.2.6**) — Insert the following new clause after **4.4.2.6**:

‘4.4.2.7 In the case of central seating positions in rear rows of seats of vehicles of category M_1 and N_1 , the above mentioned distance shall not be less than 240 mm. However, if the lower seat belt anchorage/s is/are part of the seat structure, it shall not be possible to exchange the centre rear seat with any of the other seats of the vehicle.’

(Page 8, clause **5.4**) — Insert the following after **5.4**:

‘Traction devices to be used in the tests described in clauses below are shown in Fig. 3, 4 and 5. The devices shown in Fig. 3 are placed on to the seat cushion and then, when possible, pushed back into the seat back while the belt strap is pulled tight around it. The device shown in Fig. 4 is placed in position, the belt strap is fitted over the device and pulled tight. No pre-load beyond the minimum necessary for correct positioning of the test device shall be introduced to safety-belt anchorages during this operation.

The traction device of either 254 mm or 406 mm used at each seating position shall be such that its width is as close as possible to the distance between the lower anchorages.

The positioning of the traction device shall avoid any mutual influences during the pull test which adversely affects the load and load distribution.’

(Page 8, clause **5.4.4**) — Insert the following new clause after **5.4.4**:

Amendment No. 1 to IS 15139 : 2002

‘5.4.4.1 At the choice of the vehicle manufacturer, the supplementary load can be applied as per any or all of the alternatives described below:

a) Alternatively, if the backrest is an integral part of the seat, the additional load can be applied at the traction device at lap if it can be shown that the line of action of the force passes through or above the centre of gravity of the seat and the horizontal component of this force is equal to the supplementary load specified above.

b) Alternatively, the additional load can also be applied through torso and lap traction devices, equal to the inertia effect of the mass of back rest and seat base, provided that the line of action of the force passes through or above the centre of gravity of the seat base and seat back respectively and the horizontal component of this force is equal to the supplementary load specified above.

c) In the case of a bench seat the additional load can be equally distributed through all the traction devices depending on the number of occupancy of the seat.’

(Page 9, Fig. 3) — Substitute the following for the existing figure:

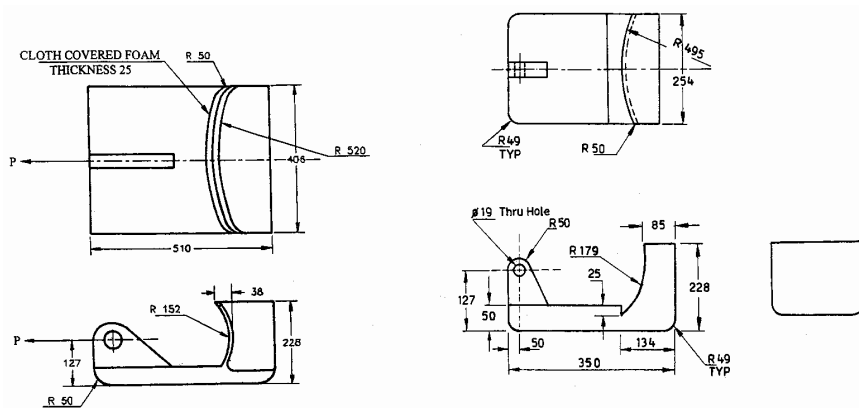


FIG.3 TRACTION DEVICE

(TED 6)