

AMENDMENT NO. 2 FEBRUARY 2026
IS 15169 : 2002 NEEDLES FOR SEWING MACHINES FOR INDUSTRIAL
PURPOSE — SPECIFICATION

(Page 3, clause 11.2.1) — Substitute the following for the existing:

‘11.2.1 Test for Breaking Angle

The needle conforming to this standard shall withstand the breaking angle test as specified in 11.2.1.1 to 11.2.1.3.

11.2.1.1 Method of test

The needle shall be held along the full length of its shank in a suitable fixture, with the Clearance Above Eye (CAE) side facing the direction of the applied force. A gradual, uniform and continuous tangential load shall be applied near or at the eye of the needle perpendicular to the needle axis, with the long groove side under compression, as shown in the figure below.

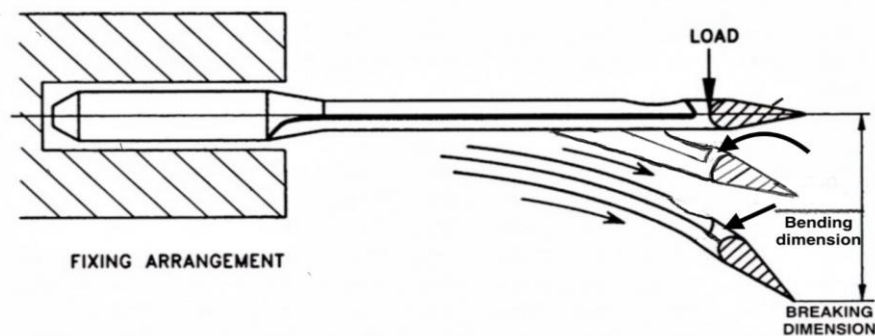


FIG. 1 ARRANGEMENT FOR BREAKING ANGLE TEST

Unlike the bending distortion test, where the force is released at a preset angle, the breaking angle test shall continue the application of force until the needle fractures.

The angle at which the needle breaks, measured from the original axis of the needle, shall be referred to as the breaking angle.

11.2.1.2 Apparatus

This test shall be carried out using a suitable arrangement and measuring device, such as an electronic testing machine or manual testing machine, capable of measuring the breaking angle of the needle as described in 11.2.1.1.

11.2.1.3 Sampling and requirement

The test shall be performed on three different needles taken from the same batch. The measured breaking angle of each needle shall lie within the range of (28 ± 10) degrees.’

(MED 29)

Price Group 1
Publication, BIS, New Delhi